





**IMPORTANT** - READ CAREFULLY BEFORE INSTALLING UNIT. RETAIN THESE INSTRUCTIONS FOR FUTURE REFERENCE. THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE NATIONAL ELECTRICAL CODE AND ALL APPLICABLE LOCAL CODES, BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT, AND THE HAZARDS INVOLVED. PROPER GROUNDING IS REQUIRED FOR SAFETY.

**START UNIT INSTALLATION**  
**INTEGRAL DRIVER (120 / 277V)**  
**DIMMING TRIAC/ELV OR 0-10V (15%), LUTRON HI-LUME® (1% EcoSystem™ / 1% 2-WIRE)**

- A- MAKE A CEILING CUT-OUT (SEE TABLE ON PAGE 3).
- B- OPEN THE CONNECTION BOXES ON TOP OF THE UNIT. UNSCREW THE BOXES PHILLIPS SCREW TO SLIDE OUT THE COVER. (SEE DETAIL 1)
- C- INSERT AND LOCK THE BX CABLE (NOT INCLUDED) INTO THE BX CONNECTORS (INCLUDED) AND MAKE NECESSARY WIRE CONNECTIONS (SEE WIRING DIAGRAM) USING TWIST CONNECTORS (NOT INCLUDED).
- D- UNSNAP THE LED MODULE USING THE TOOL (INCLUDED) AND DISCONNECT THE QUICK CONNECTOR.
- E- WITH THE MOUNTING BRACKETS IN THE NARROW POSITION, GENTLY INSERT THE UNIT INTO THE CEILING CUT-OUT.
- F- SCREW THE MOUNTING BRACKET SCREWS CLOCKWISE TO WIDEN AND LOWER THE MOUNTING BRACKETS ON THE CEILING. (SEE DETAIL 2)
- G- RECONNECT THE LED MODULE AND SCREW THE LED MODULE BACK INTO THE START UNIT.

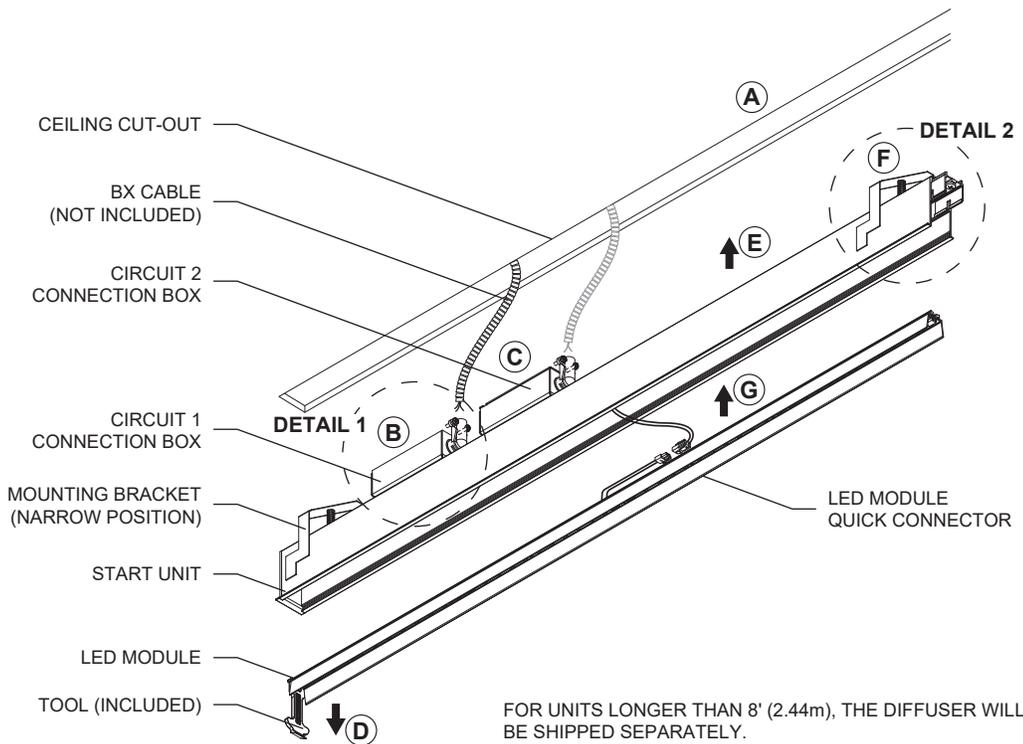


FOR UNITS LONGER THAN 8' (2.44m), THE DIFFUSER WILL BE SHIPPED SEPARATELY.

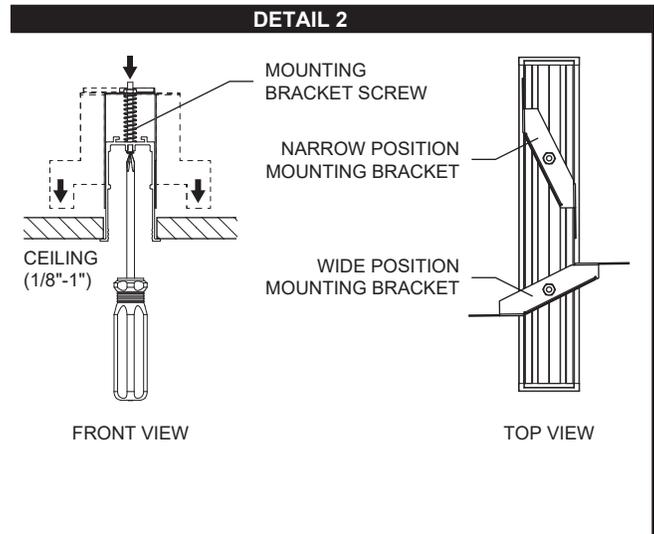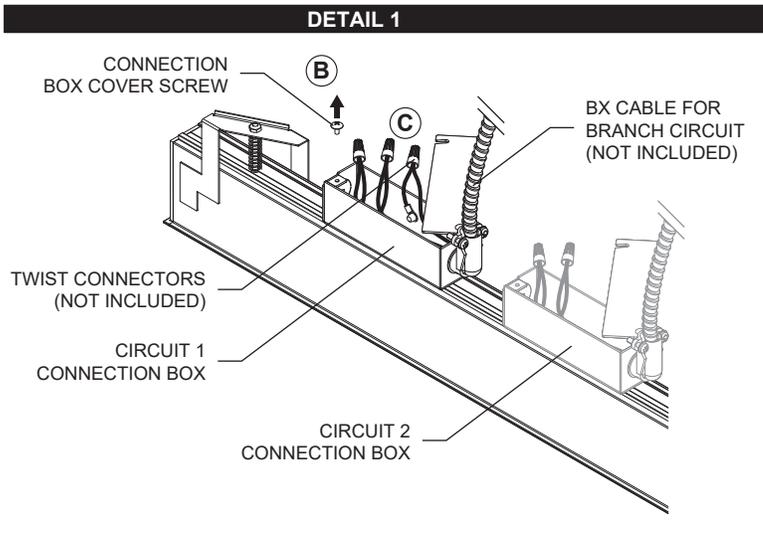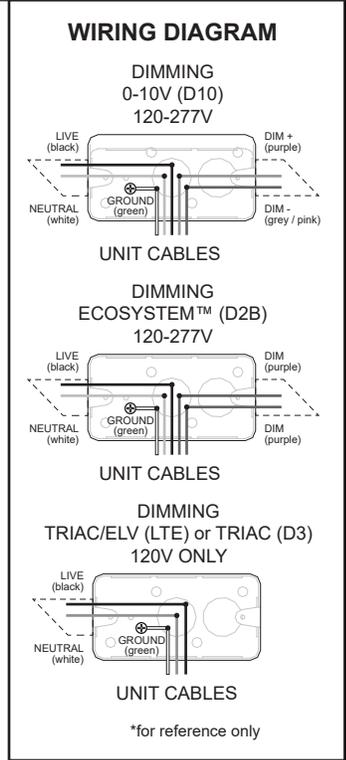


**IN-LINE UNIT INSTALLATION (LENGTHS FROM 9' AND MORE)**

- A- REMOVE THE IN-LINE UNIT LED MODULE USING THE TOOL (INCLUDED).
- B- WITH THE MOUNTING BRACKETS IN THE NARROW POSITION, GENTLY INSERT THE IN-LINE UNIT INTO THE CEILING CUT-OUT AND SLIDE IT AGAINST THE INSTALLED UNIT UNIT. MAKE SURE NOT TO PINCH ANY WIRES.
- C- SCREW THE MOUNTING BRACKET SCREWS CLOCKWISE TO SECURE THE UNIT. BEFORE ANCHORING, MAKE SURE THERE IS NO GAP IN BETWEEN THE UNITS.
- D- FASTEN THE JOINER SCREW TO THE IN-LINE UNIT. (SEE DETAIL 3 FOR LAST UNIT ASSEMBLY)
- E- REPEAT STEPS A TO D FOR ALL JOINERS.
- F- MAKE THE NECESSARY CONNECTIONS USING THE QUICK CONNECTORS BETWEEN THE UNITS.
- G- RECONNECT THE LED MODULE'S QUICK CONNECTOR AND SNAP THE LED MODULE BACK INTO THE UNITS.

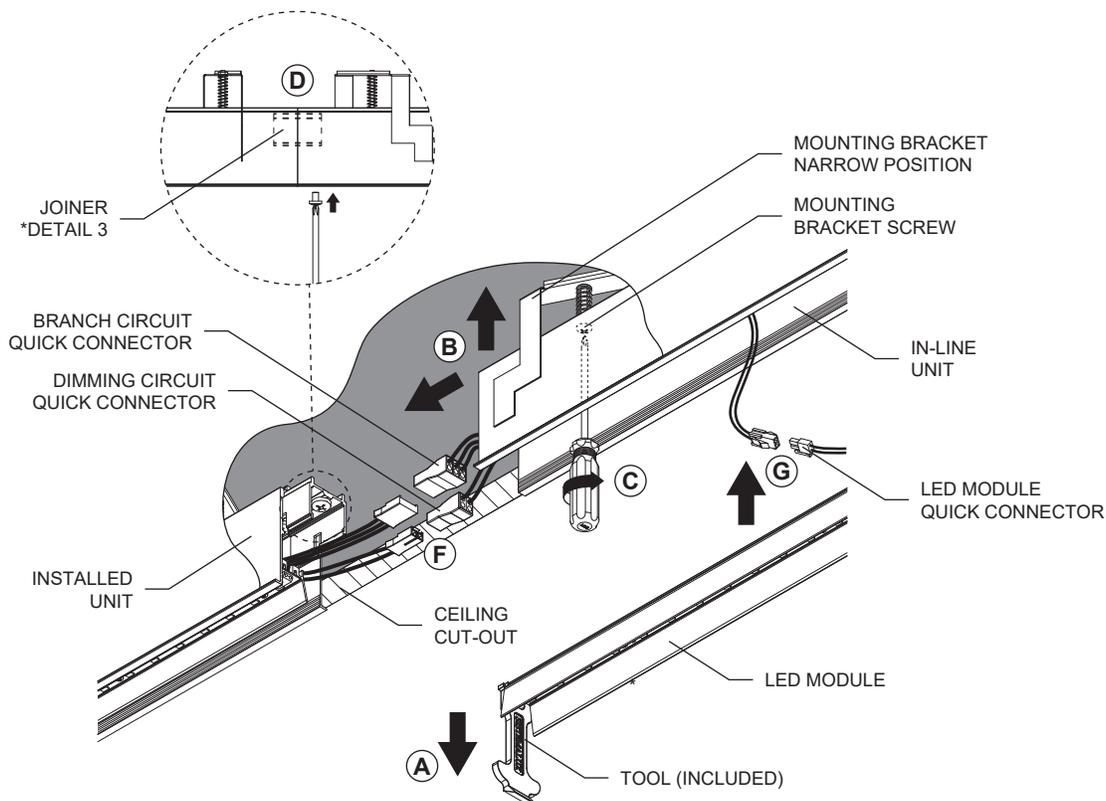


**DETAIL 3 - LAST UNIT ONLY**


1- LOOSEN THE JOINER PHILLIPS SCREWS.




2- PUSH THE JOINER INSIDE THE PREVIOUS UNIT.



3- INSERT THE LAST FIXTURE UNIT FOLLOWING STEPS A TO C.



4- PUSH THE JOINER BACK INTO PLACE LEAVING 1" ON EACH SIDE THEN TIGHTEN BOTH SCREWS. DO NOT OVERTIGHTEN THE SCREWS.




1" (25.4mm) | | | 1" (25.4mm)

RECESSED IN-LINE SYSTEM MODEL: 3702


H- ONCE ALL THE IN-LINE UNITS ARE INSTALLED, SNAP THE DIFFUSER IN PLACE.

\*THE DIFFUSER ROLL IS SHIPPED SEPARATELY FOR LENGTHS LONGER THAN 8' (2.44m)

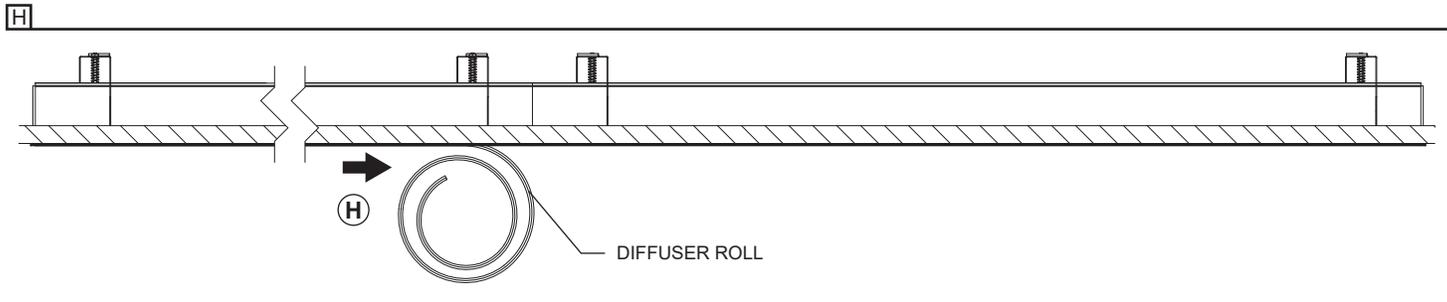

**RECESSED CUT-OUT DIMENSIONS**

IN-LINE SYSTEM

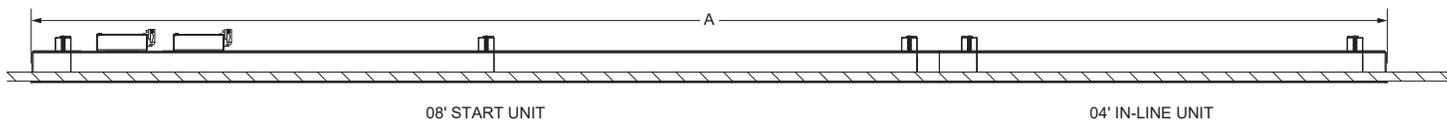

CUT-OUT FOR LINEAR RECESSED MODEL 3702			
Nominal length	Actual length (A)	Cut-out	Feed quantity
<b>04'</b>	4'-½" (1.232m)	1¾ x 48 -¼" (44mm x 1.225m)	1
<b>08'</b>	8'-½" (2.451m)	1¾ x 96 -¼" (44mm x 2.444m)	
<b>12'</b>	12'-½" (3.670m)	1¾ x 144 -¼" (44mm x 3.663m)	
<b>16'</b>	16'-½" (4.890m)	1¾ x 192 -¼" (44mm x 4.883m)	
<b>24'</b>	24'-½" (7.328m)	1¾ x 288 -¼" (44mm x 7.321m)	
<b>32'</b>	32'-½" (9.766m)	1¾ x 384 -⅜" (44mm x 9.759m)	
<b>48'</b>	48'-½" (14.643m)	1¾ x 576 -¼" (44mm x 14.636m)	
<b>64'</b>	64'-½" (19.520m)	1¾ x 768 -¼" (44mm x 19.513m)	2
<b>72'</b>	72'-½" (21.958m)	1¾ x 864 -¼" (44mm x 21.951m)	
<b>96'</b>	96'-½" (29.274m)	1¾ x 1152 -¼" (44mm x 29.267m)	

Refer to the anchor guide document for full list of available lengths.  
6A max per feed.