
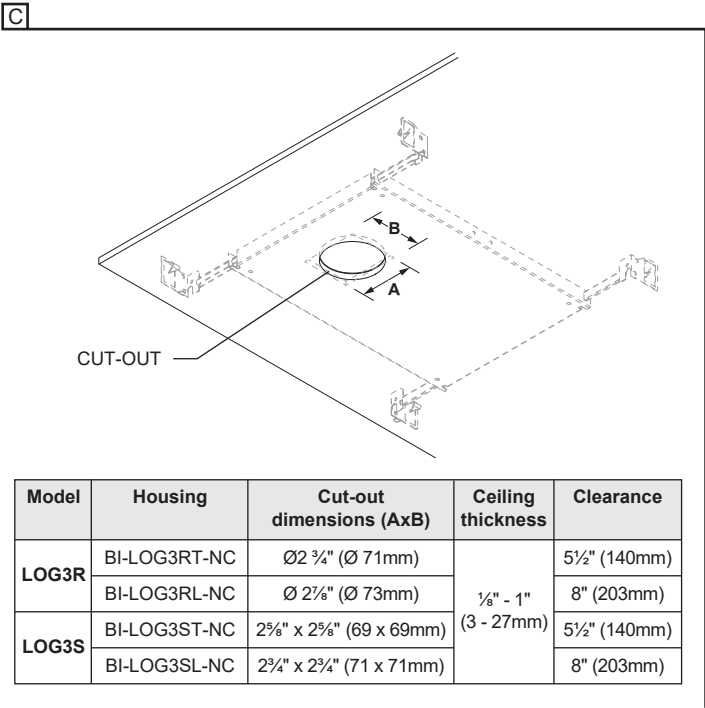
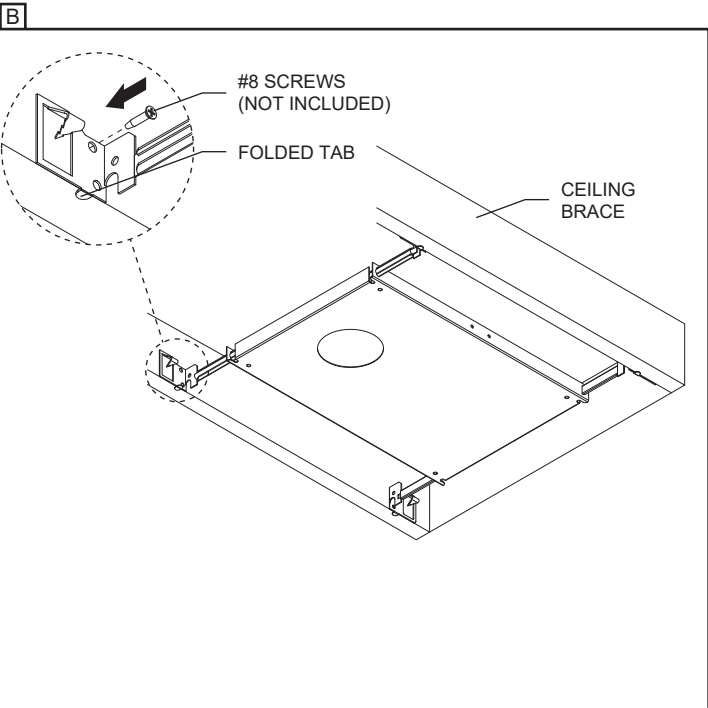


IMPORTANT - READ CAREFULLY BEFORE INSTALLING FIXTURE. RETAIN THESE INSTRUCTIONS FOR FUTURE REFERENCE.
THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE NATIONAL ELECTRICAL CODE AND ALL APPLICABLE LOCAL CODES, BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT, AND THE HAZARDS INVOLVED. PROPER GROUNDING IS REQUIRED FOR SAFETY.

NEW CONSTRUCTION WITH PLASTER FRAME INSTALLATION (NC)

- A- ENGAGE THE (4) HANGER BARS IN THE PLASTER FRAME MOUNTING SLOTS AND CONNECT THEM TOGETHER.
- B- FASTEN THE HANGER BARS TO THE CEILING BRACE WITH #8 SCREWS (**NOT INCLUDED**). THE HOUSING MUST BE FLUSH WITH THE BOTTOM OF THE CEILING BRACES.
- C- INSTALL THE DRYWALL AND DO THE CUT-OUT OPENING (SEE DIMENSIONS BELOW).

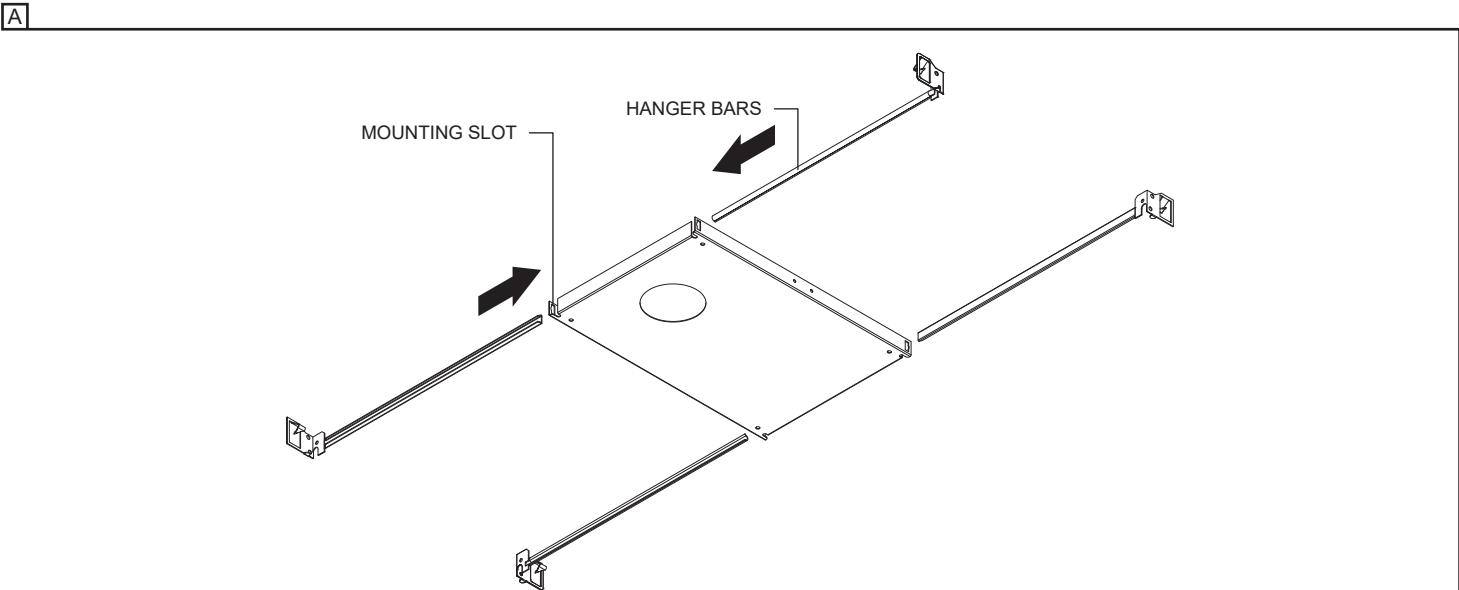

TRIM KIT INSTALLATION (NC)

A- **ROUND MODEL:** BEND AND HOLD THE SPRINGS AGAINST THE TRIM KIT AND ROTATE IN THE SPECIFIED DIRECTION (**SEE BELOW**) WHILE PUSHING UPWARD TO INSERT THE TRIM KIT INTO THE CEILING.

*ONCE INSERTED, SECURE THE TRIM KIT TO THE CEILING BY SCREWING (2) #8 SCREWS (**NOT INCLUDED**).

A- **SQUARE MODEL:** INSERT THE TRIM KIT INTO THE CEILING. TO HOLD THE KIT INSIDE THE HOUSING, SCREW THE (2) FIXATION BRACKET ADJUSTMENT SCREWS WITH A DRILL (**RECOMMENDED**). THE BRACKETS WILL OPEN AUTOMATICALLY WHILE SCREWING.

B- FINISH THE ASSEMBLY BY PLASTERING, SANDING AND PAINTING.

