

IMPORTANT - READ CAREFULLY BEFORE INSTALLING FIXTURE. RETAIN THESE INSTRUCTIONS FOR FUTURE REFERENCE.


THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE NATIONAL ELECTRICAL CODE AND ALL APPLICABLE LOCAL CODES, BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT, AND THE HAZARDS INVOLVED. PROPER GROUNDING IS REQUIRED FOR SAFETY.

REMODEL INSTALLATION WITH TRIMLESS FRAME KIT


- A- PLACE FIXATION BRACKET TABS TO THE DESIRED POSITION DEPENDING ON CEILING THICKNESS (REFER TO CHART BELOW). MAKE SURE THE RETAINING CABLE IS LOOSE IN THE CEILING.
- B- INSERT AND TIGHTEN THE FRAME KIT IN THE CUT-OUT. MAKE SURE THE FIXATION BRACKETS ARE OPEN FOR PROPER INSTALLATION.
- C- FINISH THE ASSEMBLY BY PLASTERING, SANDING AND PAINTING.

A

ITEM	CUT-OUT DIMENSIONS	CEILING THICKNESS	
		POSITION 1	POSITION 2
TK-LOG4RL-RF	Ø4 1/8" (Ø105mm)	1/8" - 3/8"	3/8" - 7/8"
TK-LOG4SL-RF	4" x 4" (100mm x 100mm)	(3mm - 10mm)	(10mm - 22mm)
TK-LOG5RL-RF	Ø5 1/8" (Ø130mm)	1/8" - 3/4"	1/2" - 1 1/4"
TK-LOG5SL-RF	5" x 5" (125mm x 125mm)	(3mm - 19mm)	(13mm - 32mm)
TK-LOG6RL-RF	Ø6 1/8" (Ø155mm)	1/8" - 7/8"	1/2" - 1 3/8"
TK-LOG6SL-RF	6" x 6" (150mm x 150mm)	(3mm - 22mm)	(13mm - 35mm)

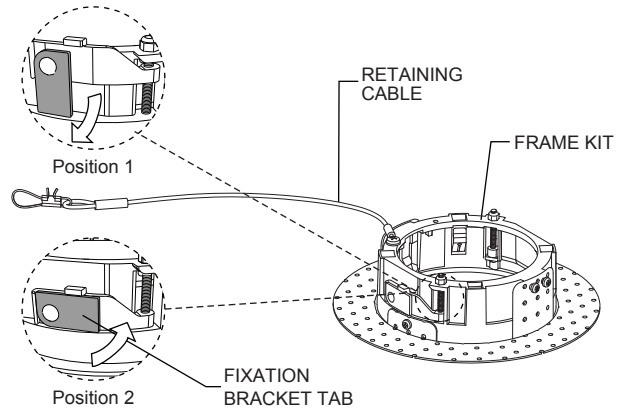

B

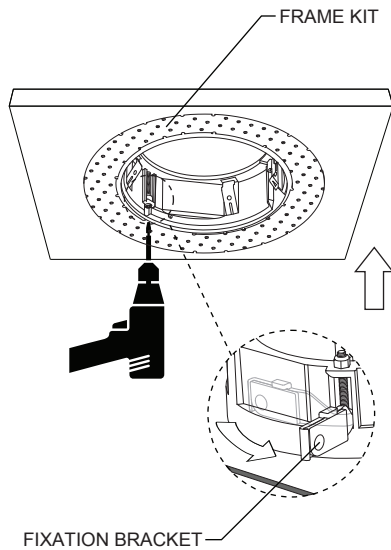

C

