


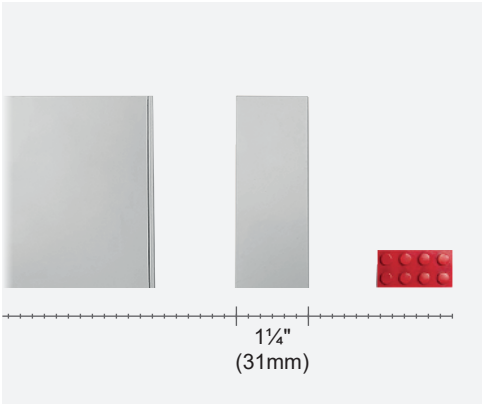



Slim high or compact profile surface luminaire with iGuzzini 48V low voltage track. Compatible with iGuzzini 48V low voltage products.

Material:	Body: Extruded aluminum profile with die-cast end caps.
Mounting:	Surface mounted using anchoring screws. Installs onto a standard 4" octagonal junction box. Supplied with square canopy.
Electrical:	Integral high efficiency electronic LED driver, rated 50 000 hours, 120-277V. Low voltage track option to be used only with iGuzzini 48V low voltage modules.
Dimming:	0-10V (120-277V) or DALI (120-277V) down to 5%.
Finish:	Available in white RAL9010 or black RAL9004. The canopy is supplied white, other finishes available on demand.
Weight:	1.59 lbs/ft (0.72kg/ft)
Warranty:	5 year limited warranty.
Ratings:	IP20, IP00 (track)
Certification:	 cULus listed for dry location.

MADE IN CANADA.


FAMILY OVERVIEW

Linear small family offers a wide range of mounting and optic options for multiple applications

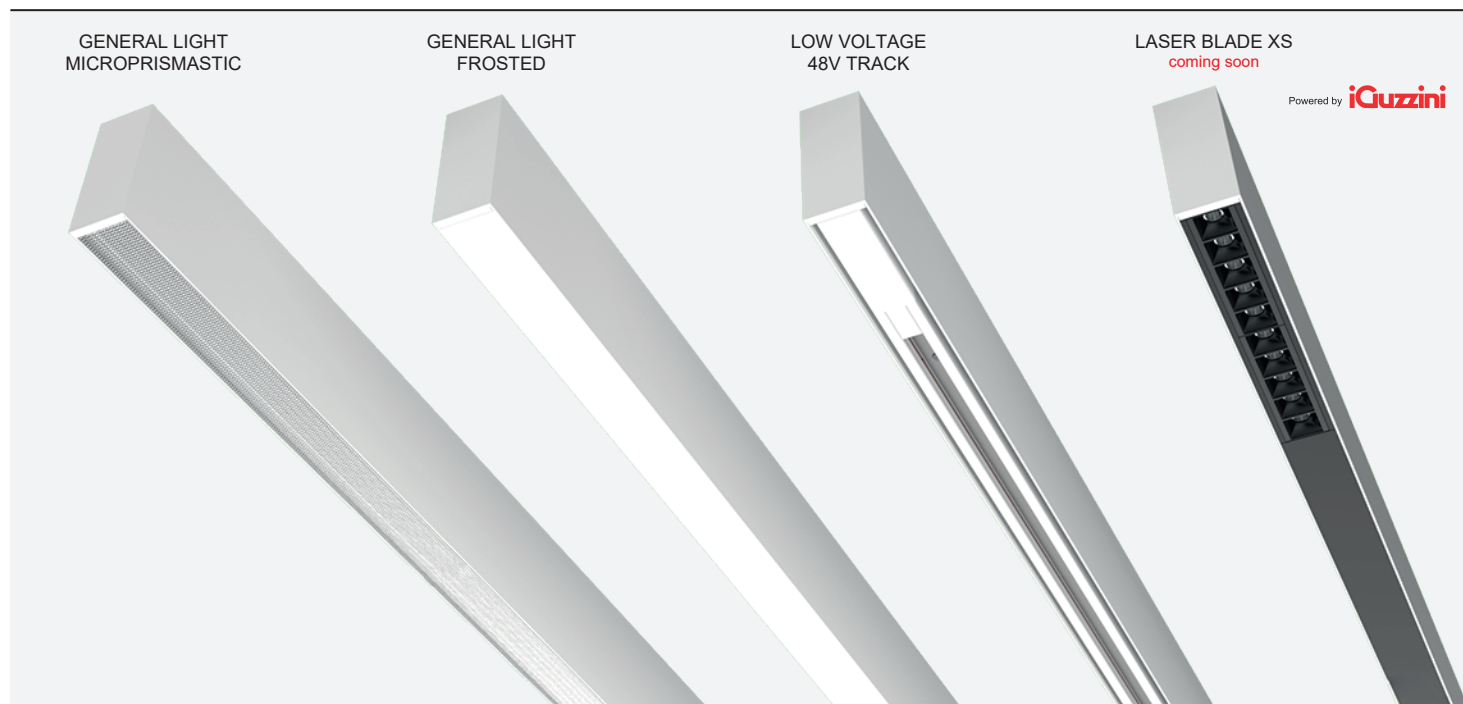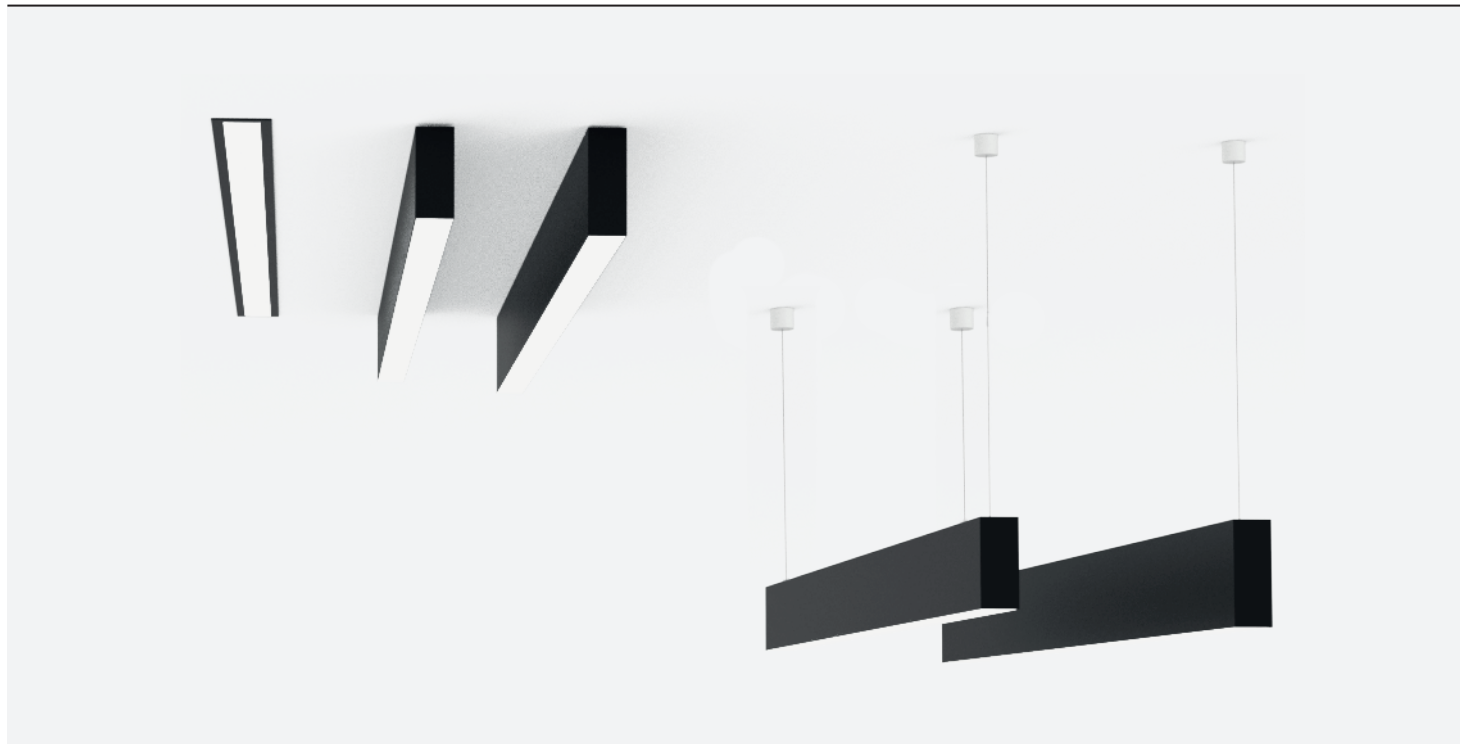


PRODUCT COMPATIBILITY

iGUZZINI PALCO LOW VOLTAGE SPOTLIGHT*

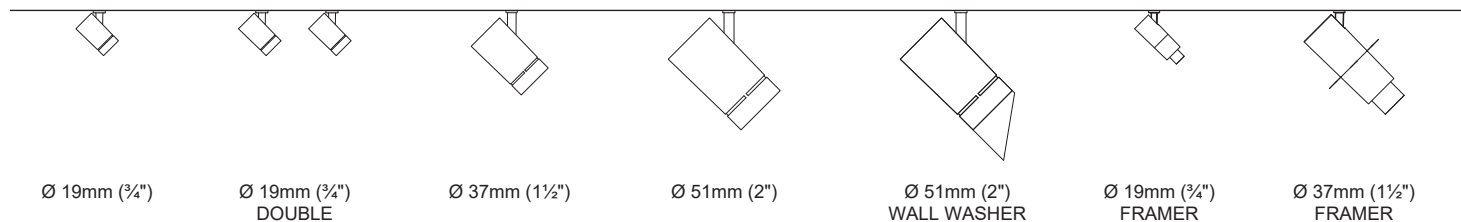


iGUZZINI LASER BLADE XS LOW VOLTAGE TRACK MODULES*

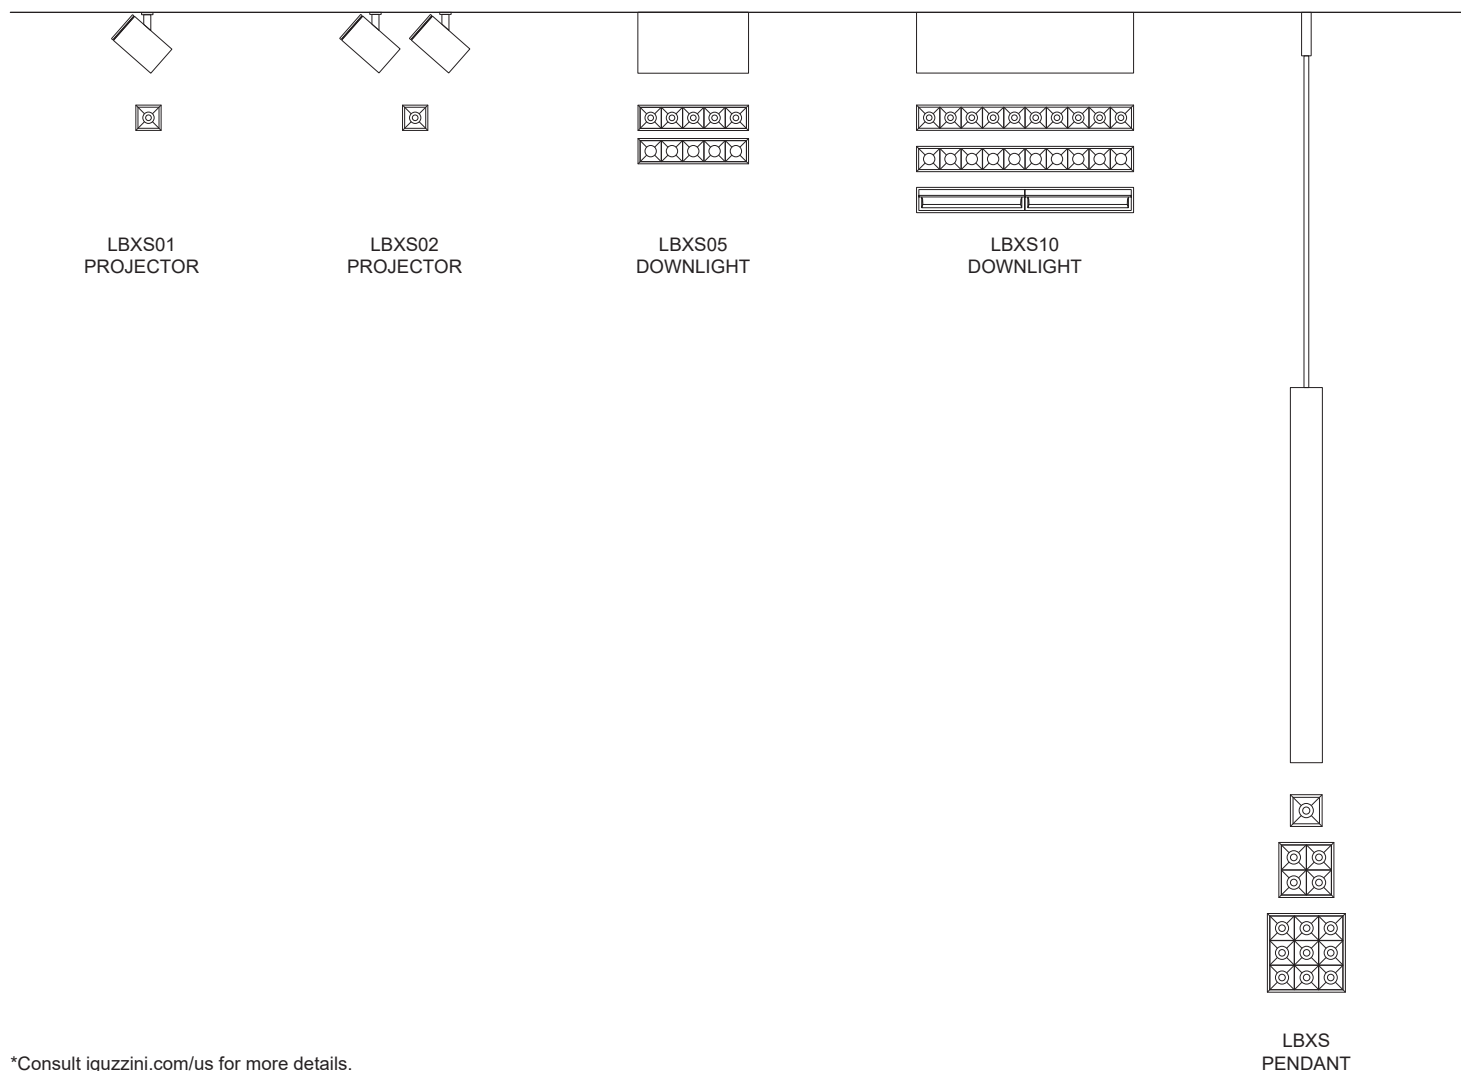


*Consult iguzzini.com/us for more details.

DIMENSIONS

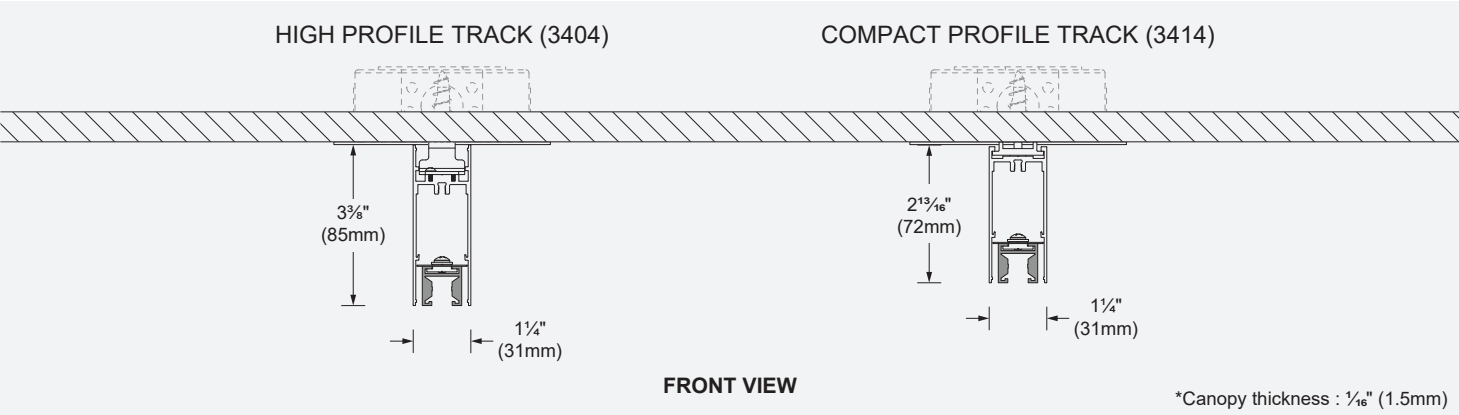

LENGTHS

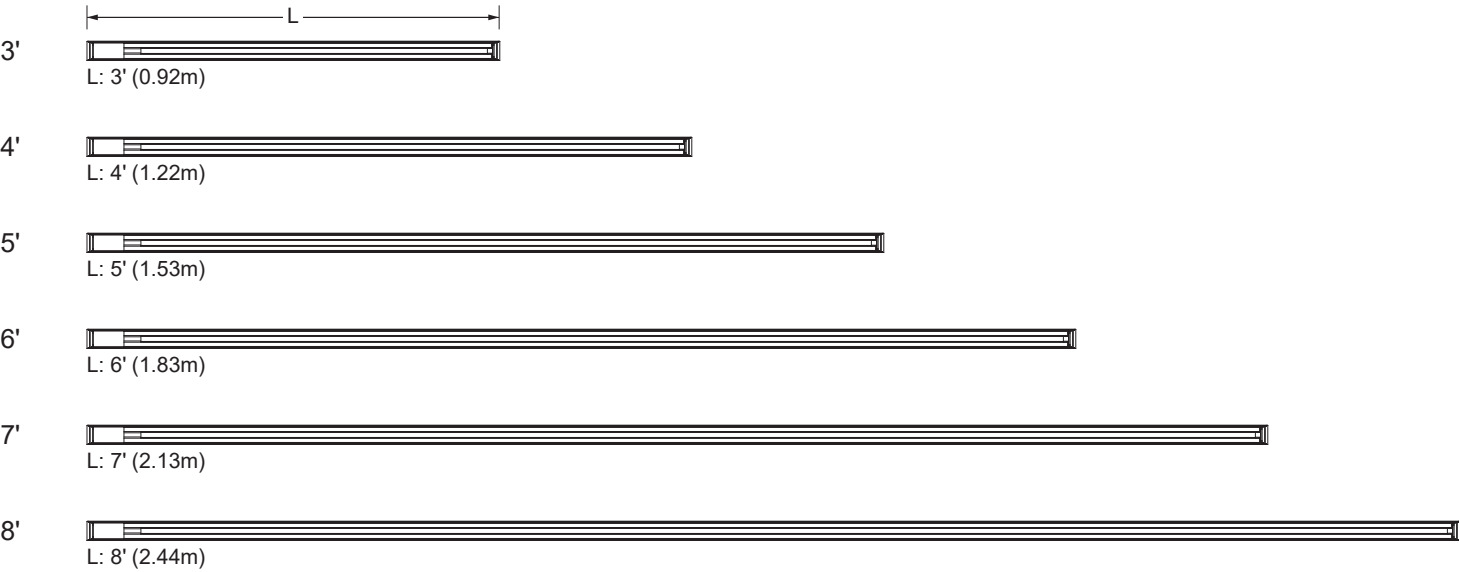

Longer lengths available. See ordering info p.3.

ORDERING INFO

- - **LZ T UNV**
FIXTURE

MODEL

- ☐ **3404** - Surface low voltage high profile track ☐ **3414** - Surface low voltage compact profile track

LENGTH

_____ 3' to 96'

TRACK

☒ **LZ** - Low voltage 48V

☒ **T** - Track

VOLTAGE

☒ **UNV** - 120-277V

FINISH

☐ **01** - White ☐ **02** - Black

DIMMING

☐ **D10** - 0-10V (down to 5%) ☐ **DA** - Dali (down to 5%)