
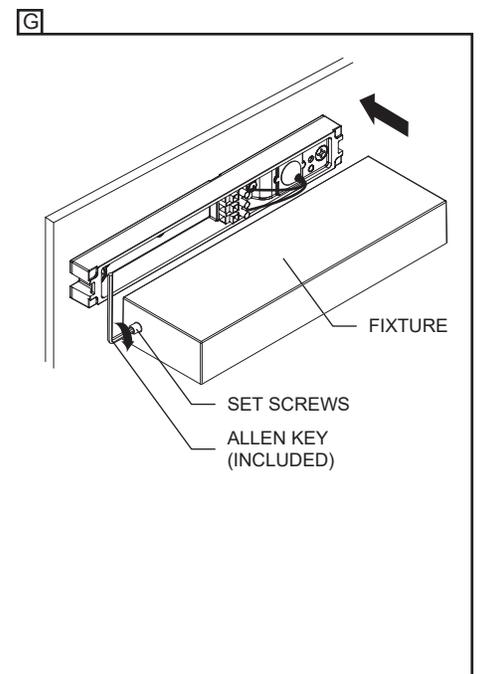
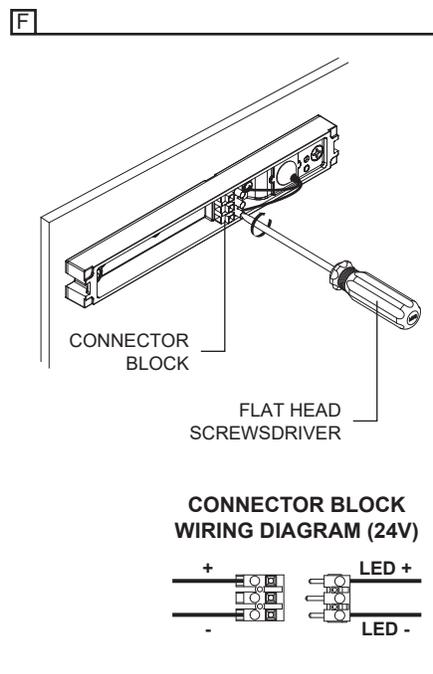
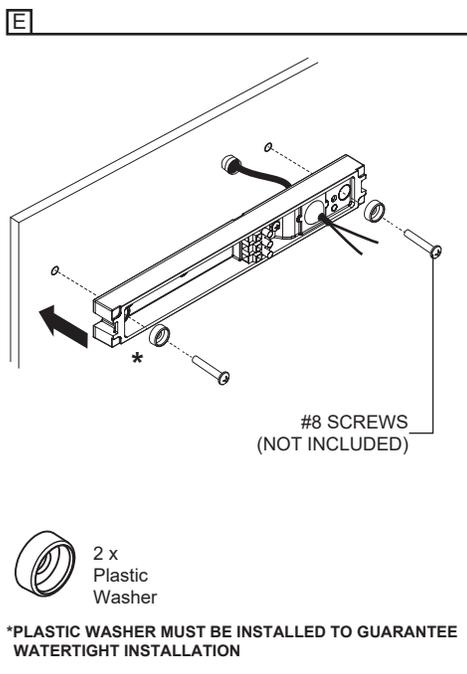
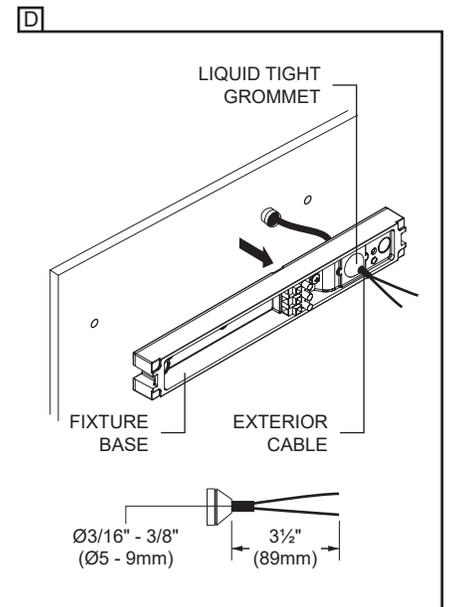
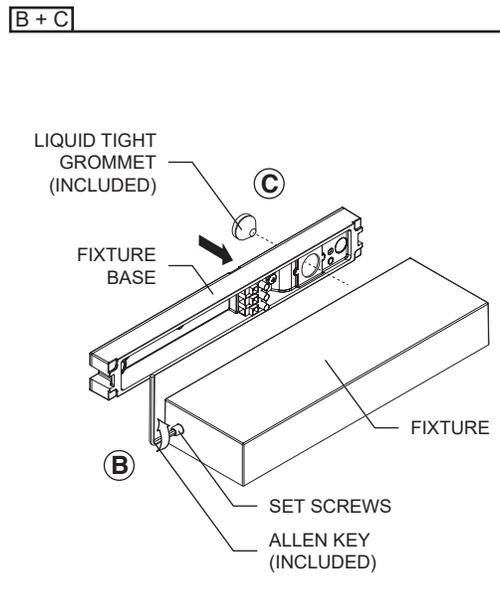


IMPORTANT - READ CAREFULLY BEFORE INSTALLING FIXTURE. RETAIN THESE INSTRUCTIONS FOR FUTURE REFERENCE. THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE NATIONAL ELECTRICAL CODE AND ALL APPLICABLE LOCAL CODES, BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT, AND THE HAZARDS INVOLVED. PROPER GROUNDING IS REQUIRED FOR SAFETY.

⚠ DISCONNECT THE MAIN LINE BEFORE WIRING SECONDARY CONNECTORS.




DIRECT FEED INSTALLATION (DF) - LOW VOLTAGE (24V) REMOTE DRIVER (REM)

- A- PREPARE SURFACE FOR INSTALLATION (**SEE DIMENSIONS BELOW**). *INSERT (2) ANCHOR SCREWS (**NOT INCLUDED**) IF NECESSARY.
- B- UNFASTEN THE SET SCREWS WITH AN ALLEN KEY (**INCLUDED**) TO REMOVE THE FIXTURE FROM THE BASE. DO NOT COMPLETELY REMOVE THE SET SCREWS.
- C- INSERT THE LIQUID TIGHT GROMMET (**INCLUDED**) INTO FIXTURE BASE.
- D- PASS EXTERIOR CABLE THROUGH LIQUID TIGHT GROMMET.
- E- USING (2) #8 SCREWS (**NOT INCLUDED**) AND WASHERS (**INCLUDED**), INSTALL THE FIXTURE BASE TO THE WALL. *TO GUARANTEE A WATERTIGHT INSTALLATION, MAKE SURE TO INSERT THE WASHERS (**SEE BELOW**).
- F- MAKE ALL NECESSARY WIRE CONNECTIONS INTO THE CONNECTOR BLOCK USING A SCREWS DRIVER (**SEE WIRING DIAGRAM BELOW**).
- G- FASTEN THE FIXTURE ON ITS BASE WITH THE SET SCREWS WITH AN ALLEN KEY (**INCLUDED**).

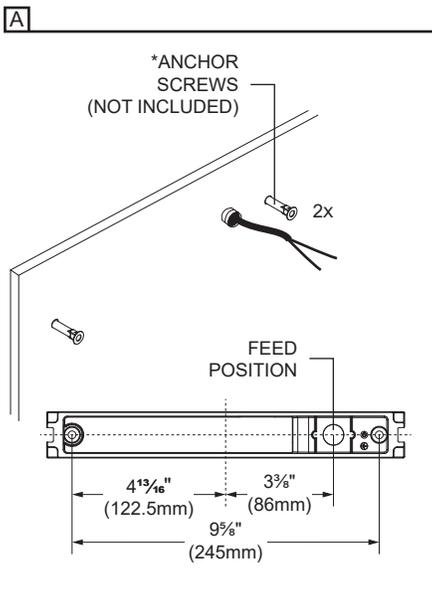

**4" JUNCTION BOX INSTALLATION (JB)
 LOW VOLTAGE (24V) REMOTE DRIVER (REM) OR INTEGRAL DRIVER 120-277V (UNV)**

- A- FIX THE UNIVERSAL CROSSBAR TO THE 4" JUNCTION BOX USING (2) PHILLIPS SCREWS (INCLUDED).
 MAKE SURE THE UNIVERSAL CROSSBAR IS PROPERLY ALIGNED.
- B- INSTALL THE MOUNTING PLATE ON THE UNIVERSAL CROSSBAR USING (2) PHILLIPS SCREWS (INCLUDED).
- C- UNFASTEN THE SET SCREWS WITH AN ALLEN KEY (INCLUDED) AND REMOVE THE FIXTURE FROM THE BASE. DO NOT COMPLETELY REMOVE THE SET SCREWS.
- D- MAKE WIRE CONNECTIONS (FOLLOWING POLARITY MARKING) USING WATERTIGHT CONNECTORS (NOT INCLUDED)
- E- USING (2) PHILLIPS SCREWS AND WASHERS (INCLUDED), INSTALL THE FIXTURE BASE TO THE WALL.
- *TO GUARANTEE A WATERTIGHT INSTALLATION, MAKE SURE TO INSERT THE WASHERS (SEE BELOW).
- F- REPLACE THE FIXTURE BASE BY ALINING THE 3 PIN. PUSH THE 3 PINS IN THE OUTLET ON THE FIXTURE BASE.
- G- FASTEN THE FIXTURE ON ITS BASE WITH THE SET SCREWS WITH AN ALLEN KEY (INCLUDED).

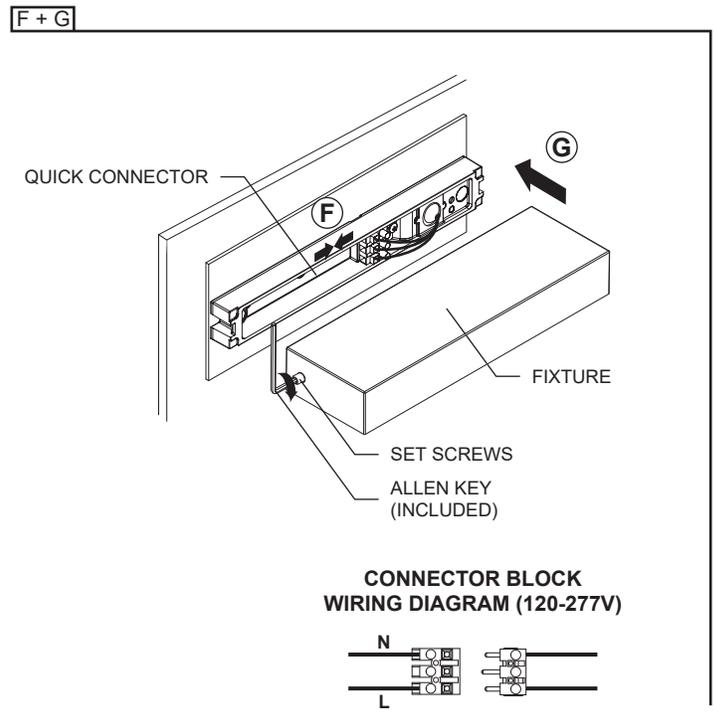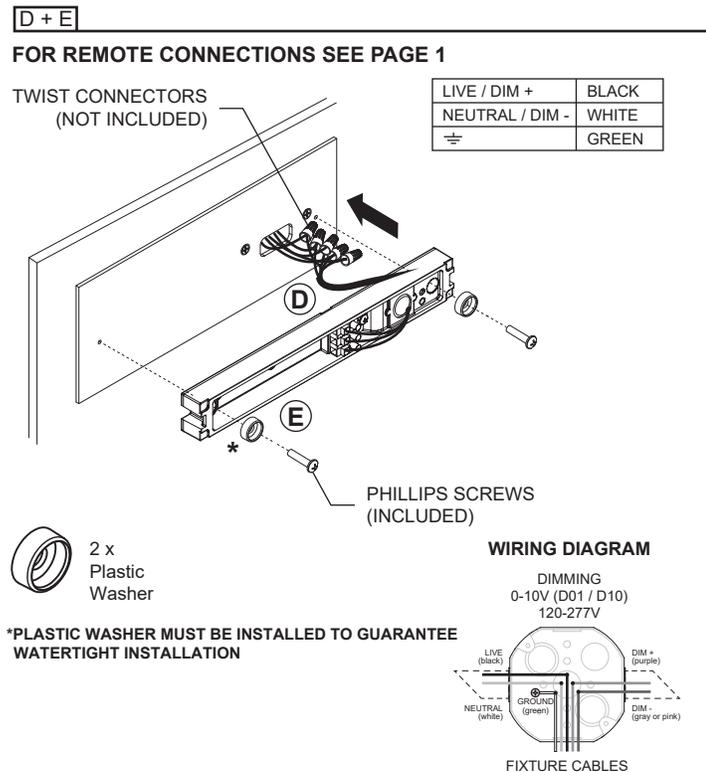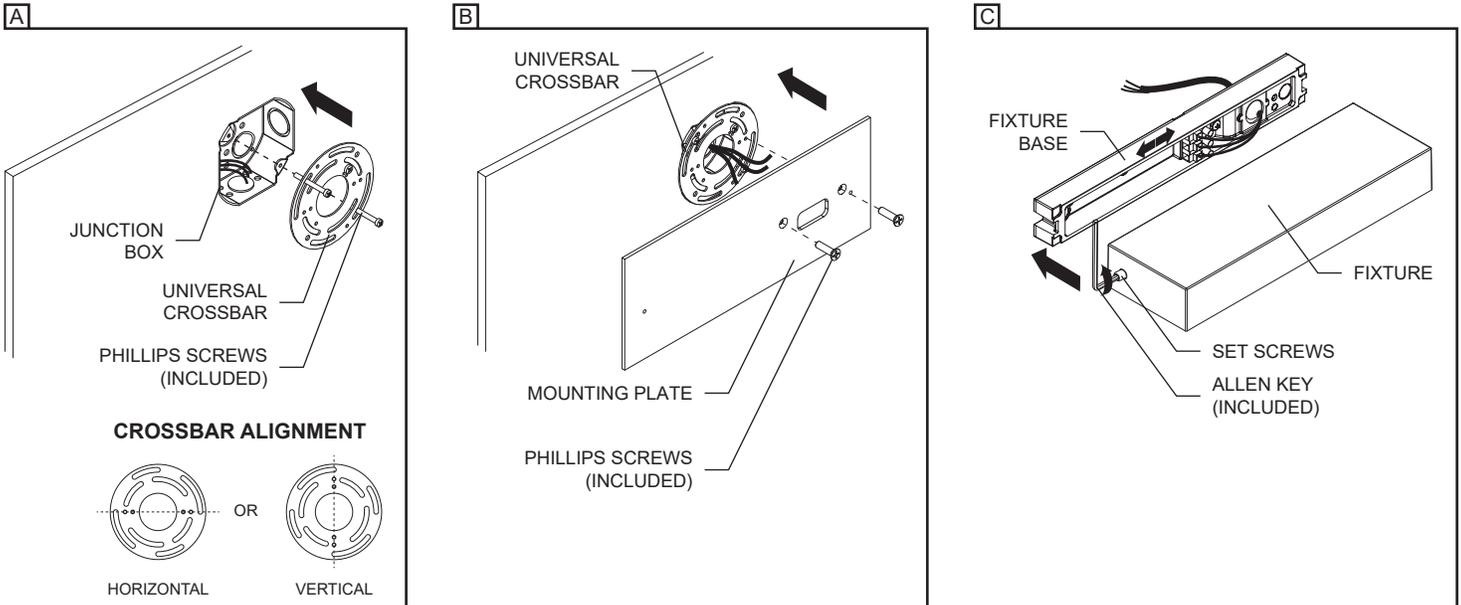

2" JUNCTION BOX INSTALLATION (J2) LOW VOLTAGE (24V) REMOTE DRIVER (REM) OR INTEGRAL DRIVER 120-277V (UNV)

- A- INSTALL THE MOUNTING PLATE ON THE 2" JUNCTION BOX USING (2) PHILLIPS SCREWS (INCLUDED).
MAKE SURE THE 2" JUNCTION BOX IS PROPERLY ALIGNED.
- B- UNFASTEN THE SET SCREWS WITH AN ALLEN KEY (INCLUDED) AND REMOVE THE FIXTURE FROM THE BASE. DO NOT COMPLETELY REMOVE THE SET SCREWS.
- C- MAKE WIRE CONNECTIONS (FOLLOWING POLARITY MARKING) USING WATERTIGHT CONNECTORS (NOT INCLUDED) COVER DIMMING CABLE IF NOT USING.
- D- USING (2) PHILLIPS SCREWS AND WASHERS (INCLUDED), INSTALL THE FIXTURE BASE TO THE WALL.
*TO GUARANTEE A WATERTIGHT INSTALLATION, MAKE SURE TO INSERT THE WASHERS.
- E- REPLACE THE FIXTURE BASE BY ALINING THE 3 PIN. PUSH THE 3 PINS IN THE OUTLET ON THE FIXTURE BASE. FOR 0-10V VERSION CONNECT THE 2 X 0-10V WIRE WITH QUICK CONNECTORS.
- F- FASTEN THE FIXTURE ON ITS BASE WITH THE SET SCREWS WITH AN ALLEN KEY (INCLUDED).

