
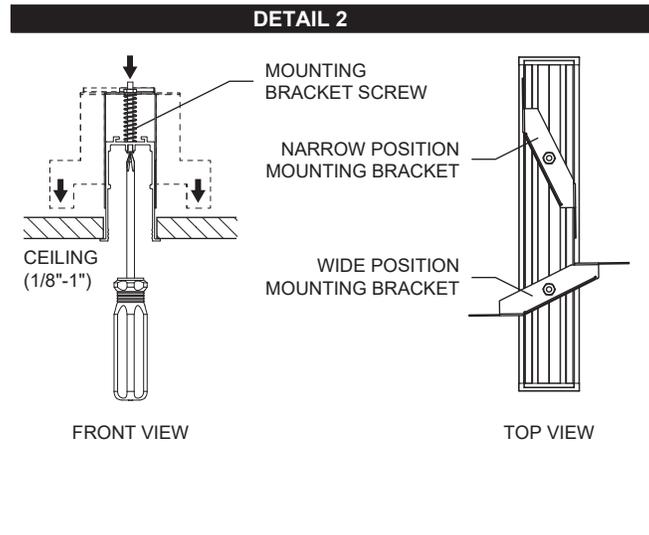
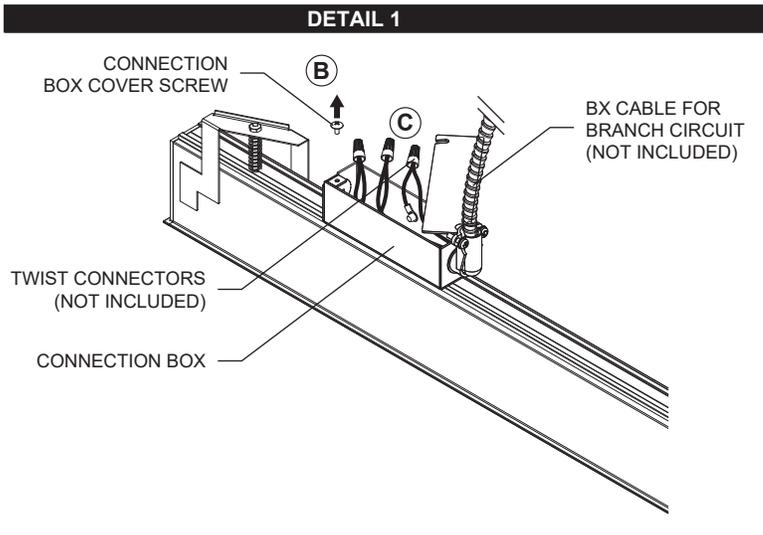


**IMPORTANT** - READ CAREFULLY BEFORE INSTALLING UNIT. RETAIN THESE INSTRUCTIONS FOR FUTURE REFERENCE.

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE NATIONAL ELECTRICAL CODE AND ALL APPLICABLE LOCAL CODES, BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT, AND THE HAZARDS INVOLVED. PROPER GROUNDING IS REQUIRED FOR SAFETY.


## IN-LINE UNIT INSTALLATION

- A- MAKE A CEILING CUT-OUT (SEE TABLE ON PAGE 3).
- B- OPEN THE CONNECTION BOXES ON TOP OF THE UNIT. UNSCREW THE BOXES PHILLIPS SCREW TO SLIDE OUT THE COVER. (SEE DETAIL 1)
- C- INSERT AND LOCK THE BX CABLE (NOT INCLUDED) INTO THE BX CONNECTORS (INCLUDED) AND MAKE NECESSARY WIRE CONNECTIONS (SEE WIRING DIAGRAM) USING TWIST CONNECTORS (NOT INCLUDED).
- D- UNSCREW THE (2) PHILLIPS SCREWS (INCLUDED) TO REMOVE THE TRACK AND DISCONNECT THE LED MODULE QUICK CONNECTOR.
- E- WITH THE MOUNTING BRACKETS IN THE NARROW POSITION, GENTLY INSERT THE UNIT INTO THE CEILING CUT-OUT.
- F- SCREW THE MOUNTING BRACKET SCREWS CLOCKWISE TO WIDEN AND LOWER THE MOUNTING BRACKETS ON THE CEILING. (SEE DETAIL 2)
- G- CONNECT THE TRACK'S QUICK CONNECTOR AND SCREW THE TRACK BACK.

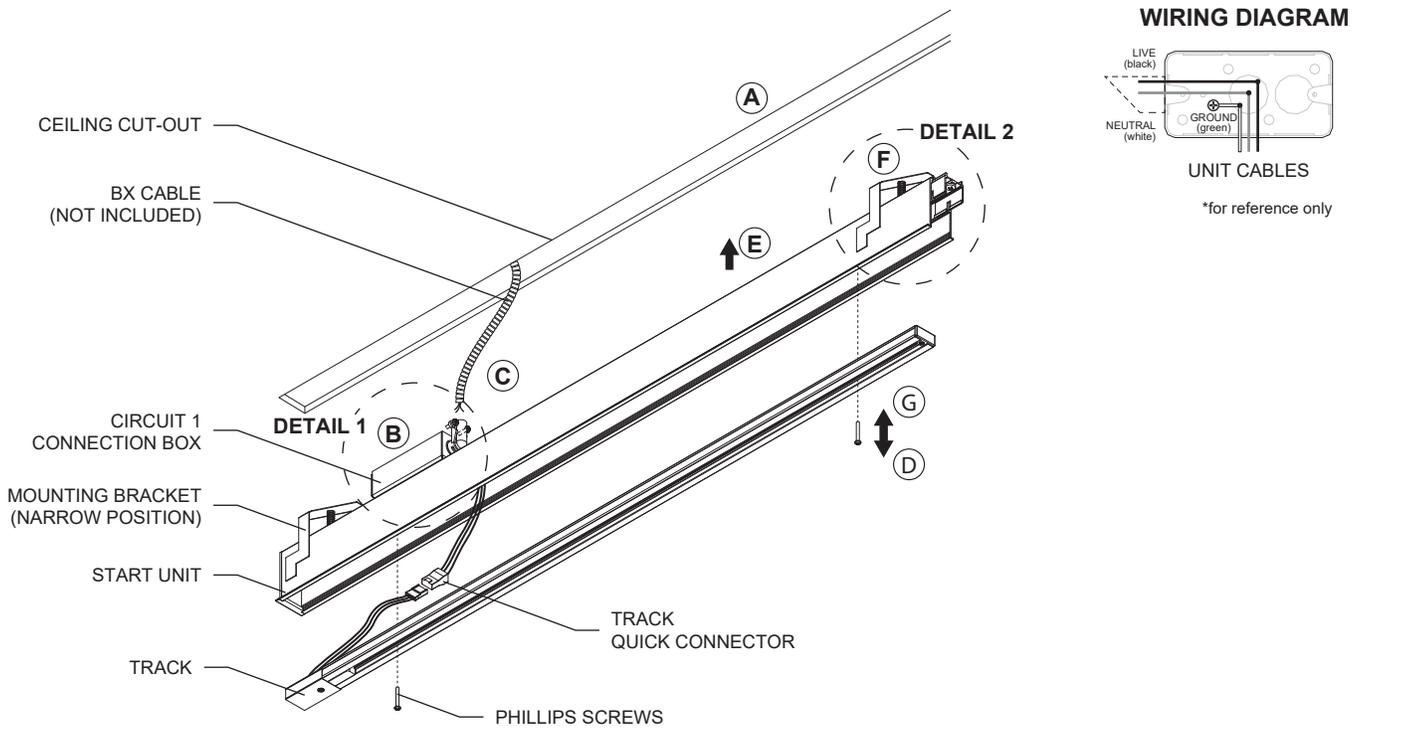


**IN-LINE UNIT INSTALLATION (LENGTHS FROM 9' AND MORE)**

- A- UNSCREW THE IN-LINE UNIT (2) PHILLIPS SCREWS (INCLUDED) TO REMOVE THE TRACK AND DISCONNECT THE QUICK CONNECTOR.
- B- WITH THE MOUNTING BRACKETS IN THE NARROW POSITION, GENTLY INSERT THE IN-LINE UNIT INTO CEILING CUT-OUT AND SLIDE IT AGAINST THE INSTALLED UNIT. MAKE SURE NOT TO PINCH ANY WIRES.
- C- SCREW THE MOUNTING BRACKET SCREWS CLOCKWISE TO SECURE THE UNIT. BEFORE ANCHORING, MAKE SURE THERE IS NO GAP IN BETWEEN THE UNITS.
- D- FASTEN THE JOINER SCREW TO THE IN-LINE UNIT. (SEE DETAIL 3 FOR LAST UNIT ASSEMBLY)
- E- MAKE THE NECESSARY CONNECTIONS USING THE QUICK CONNECTORS BETWEEN UNITS.
- F- CONNECT THE TRACK'S QUICK CONNECTOR AND SCREW THE TRACK BACK INTO THE IN-LINE UNIT.

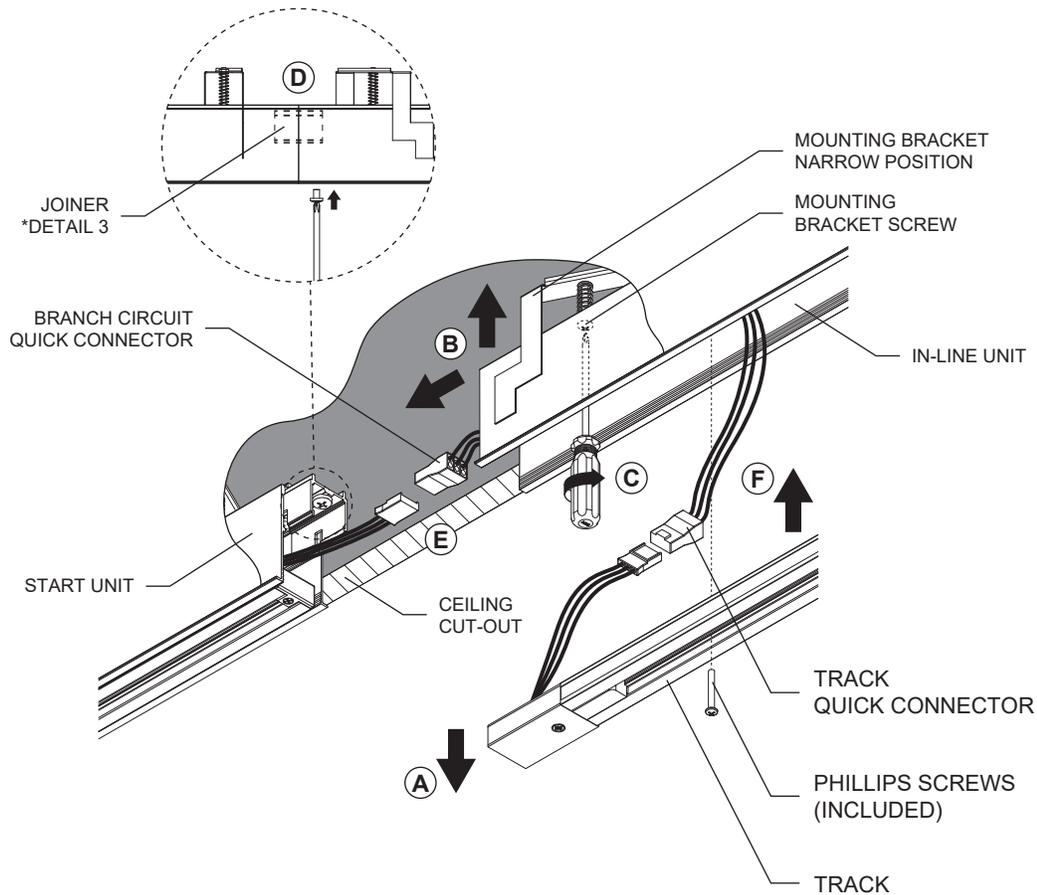


**DETAIL 3 - LAST UNIT ONLY**


1- LOOSEN THE JOINER PHILLIPS SCREWS.




2- PUSH THE JOINER INSIDE THE PREVIOUS UNIT.



3- INSERT THE LAST UNIT UNIT FOLLOWING STEPS A TO C.




4- PUSH THE JOINER BACK INTO PLACE LEAVING 1" ON EACH SIDE THEN TIGHTEN BOTH SCREWS. DO NOT OVERTIGHTEN THE SCREWS.



1" (25.4mm) | | | 1" (25.4mm)

**RECESSED CUT-OUT DIMENSIONS**

IN-LINE SYSTEM

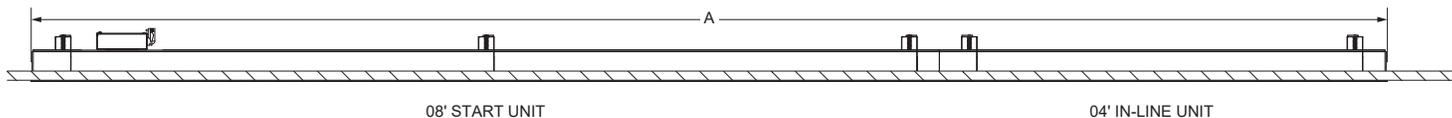

CUT-OUT FOR LINEAR RECESSED MODEL 3702				
Nominal length	Actual length (A)	Cut-out	Feed quantity (120V)	Feed quantity (277V)
04'	4'-1/2" (1.232m)	1 3/4 x 48 -1/4" (44mm x 1.225m)	1	1
08'	8'-1/2" (2.451m)	1 3/4 x 96 -1/4" (44mm x 2.444m)		
12'	12'-1/2" (3.670m)	1 3/4 x 144 -1/4" (44mm x 3.663m)		
16'	16'-1/2" (4.890m)	1 3/4 x 192 -1/4" (44mm x 4.883m)		
24'	24'-1/2" (7.328m)	1 3/4 x 288 -1/4" (44mm x 7.321m)		
32'	32'-1/2" (9.766m)	1 3/4 x 384 -1/4" (44mm x 9.759m)		
48'	48'-1/2" (14.643m)	1 3/4 x 576 -1/4" (44mm x 14.636m)	2	2
64'	64'-1/2" (19.520m)	1 3/4 x 768 -1/4" (44mm x 19.513m)		
72'	72'-1/2" (21.958m)	1 3/4 x 864 -1/4" (44mm x 21.951m)	3	2
96'	96'-1/2" (29.274m)	1 3/4 x 1152 -1/4" (44mm x 29.267m)		

Refer to the anchor guide document for full list of available lengths.  
6A max per feed.