
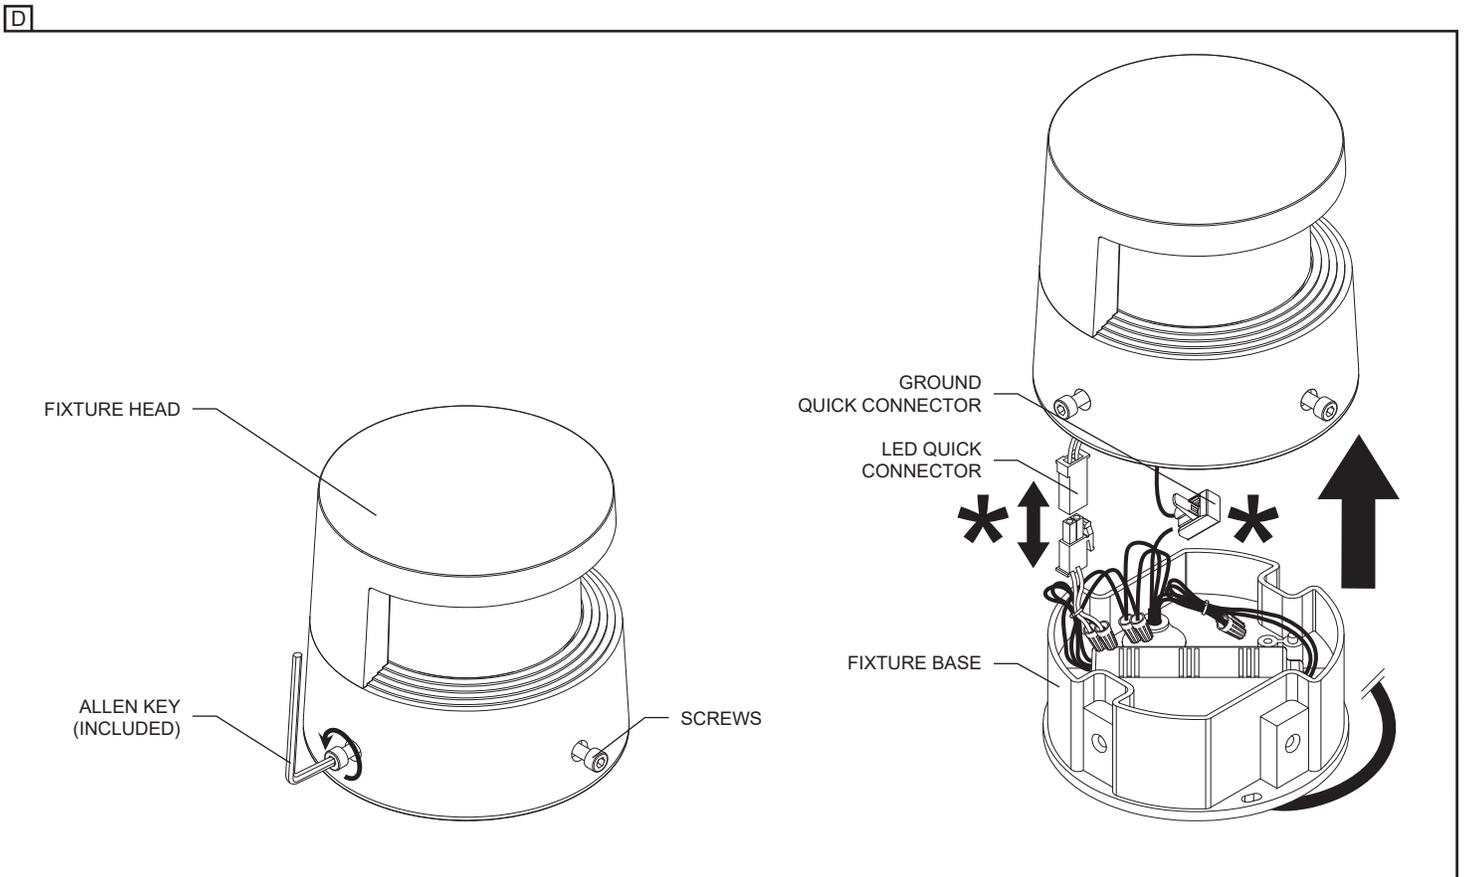
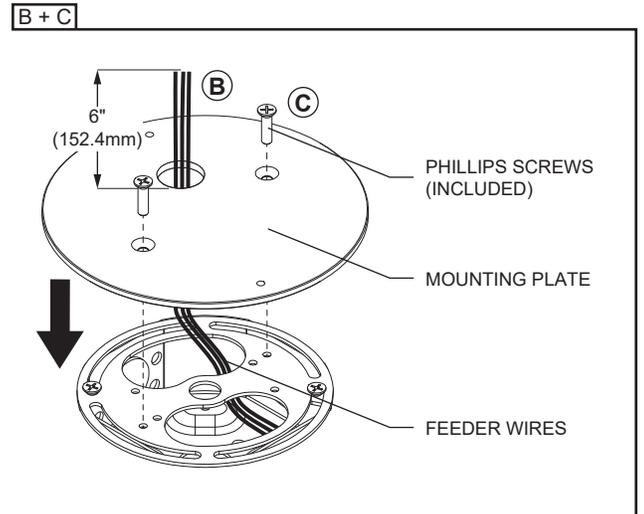


**IMPORTANT** - READ CAREFULLY BEFORE INSTALLING FIXTURE. RETAIN THESE INSTRUCTIONS FOR FUTURE REFERENCE. THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE NATIONAL ELECTRICAL CODE AND ALL APPLICABLE LOCAL CODES, BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT, AND THE HAZARDS INVOLVED. PROPER GROUNDING IS REQUIRED FOR SAFETY.

## JUNCTION BOX INSTALLATION INTEGRAL DRIVER (120 / 277V)

- A- FASTEN THE UNIVERSAL CROSSBAR ON A STANDARD 4"(102mm) JUNCTION BOX WITH (2) 8-32 SCREWS (**NOT INCLUDED**).
  - B- PULL FEEDER WIRES THROUGH THE UNIVERSAL CROSSBAR AND MOUNTING PLATE HOLE AT LEAST 6" (152.4mm).
  - C- FASTEN THE MOUNTING PLATE TO THE UNIVERSAL CROSSBAR WITH THE (2) PHILLIPS SCREWS (**INCLUDED**).
  - D- UNFASTEN THE FIXTURE HEAD (4) SCREWS WITH AN ALLEN KEY (**INCLUDED**) AND REMOVE IT.
- \*BEFORE FULLY REMOVING THE FIXTURE HEAD, DISCONNECT THE LED AND GROUND QUICK CONNECTORS.

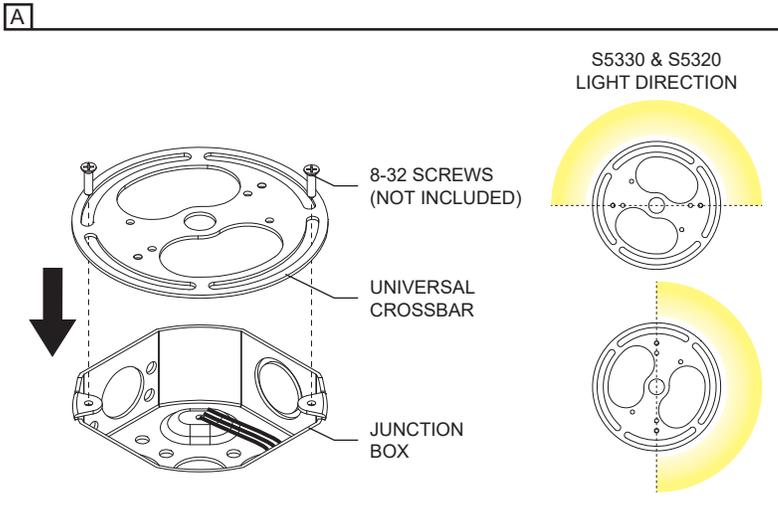

E- MAKE WIRE CONNECTIONS (**SEE WIRING DIAGRAM**) USING WATERTIGHT TWIST CONNECTORS (**NOT INCLUDED**). INSERT CONNECTED WIRES THROUGH MOUNTING PLATE AND PUSH THEM INTO THE JUNCTION BOX.

\*CUT THE FIXTURE'S EXCESS FEEDER CABLE IF NECESSARY.


F- FASTEN THE FIXTURE BASE TO THE MOUNTING PLATE WITH THE (2) PHILLIPS SCREWS AND WASHERS (**INCLUDED**).

G- RECONNECT THE GROUND WIRES USING THE QUICK CONNECTOR.


H- RECONNECT THE LED QUICK CONNECTOR.

I- FASTEN THE FIXTURE HEAD (4) SCREWS USING AN ALLEN KEY (**INCLUDED**).


**E + F**

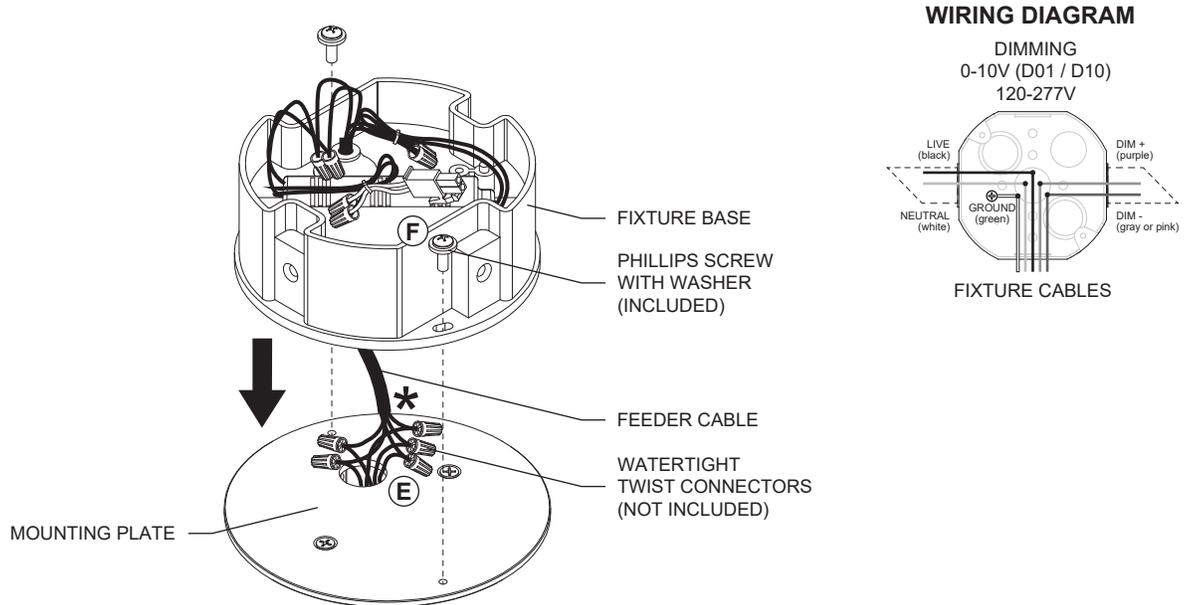

**G + H**


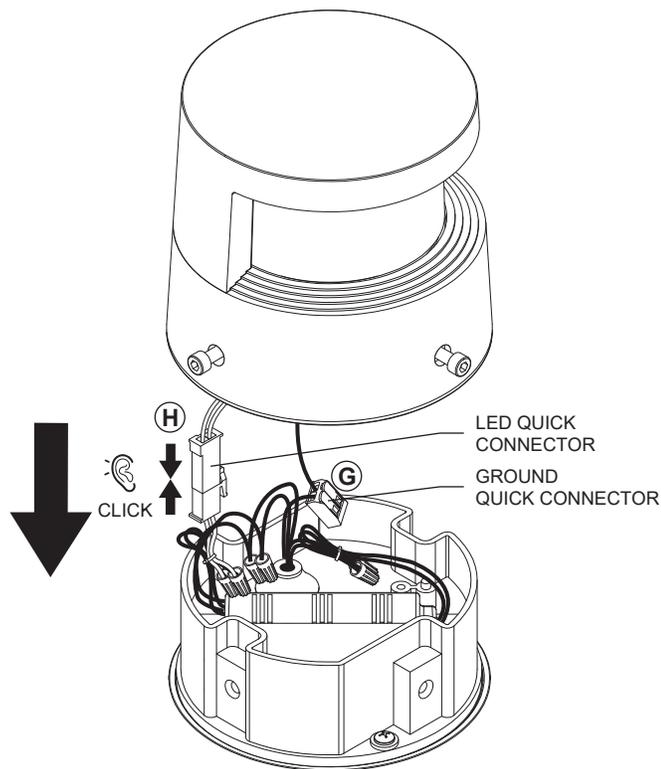


**I**

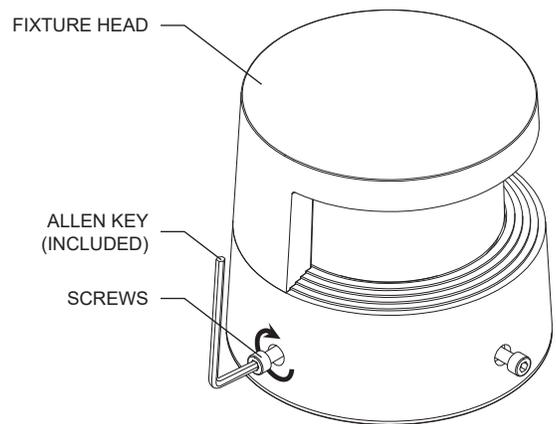


**GROUND INSTALLATION IN CONCRETE WITH FLANGE (S5301).  
INTEGRAL DRIVER (120 / 277V)**

- A- DIG A HOLE (**SEE DIMENSION BELOW**), PUT THE FLANGE AND ELECTRICAL CONDUIT INTO THE GROUND. POUR CONCRETE AND MAKE SURE IT IS LEVELED WITH THE FLANGE.
- B- UNFASTEN THE FIXTURE HEAD (4) SCREWS WITH AN ALLEN KEY (**INCLUDED**) AND REMOVE IT.  
\*BEFORE FULLY REMOVING THE FIXTURE HEAD, DISCONNECT THE LED AND GROUND QUICK CONNECTORS.

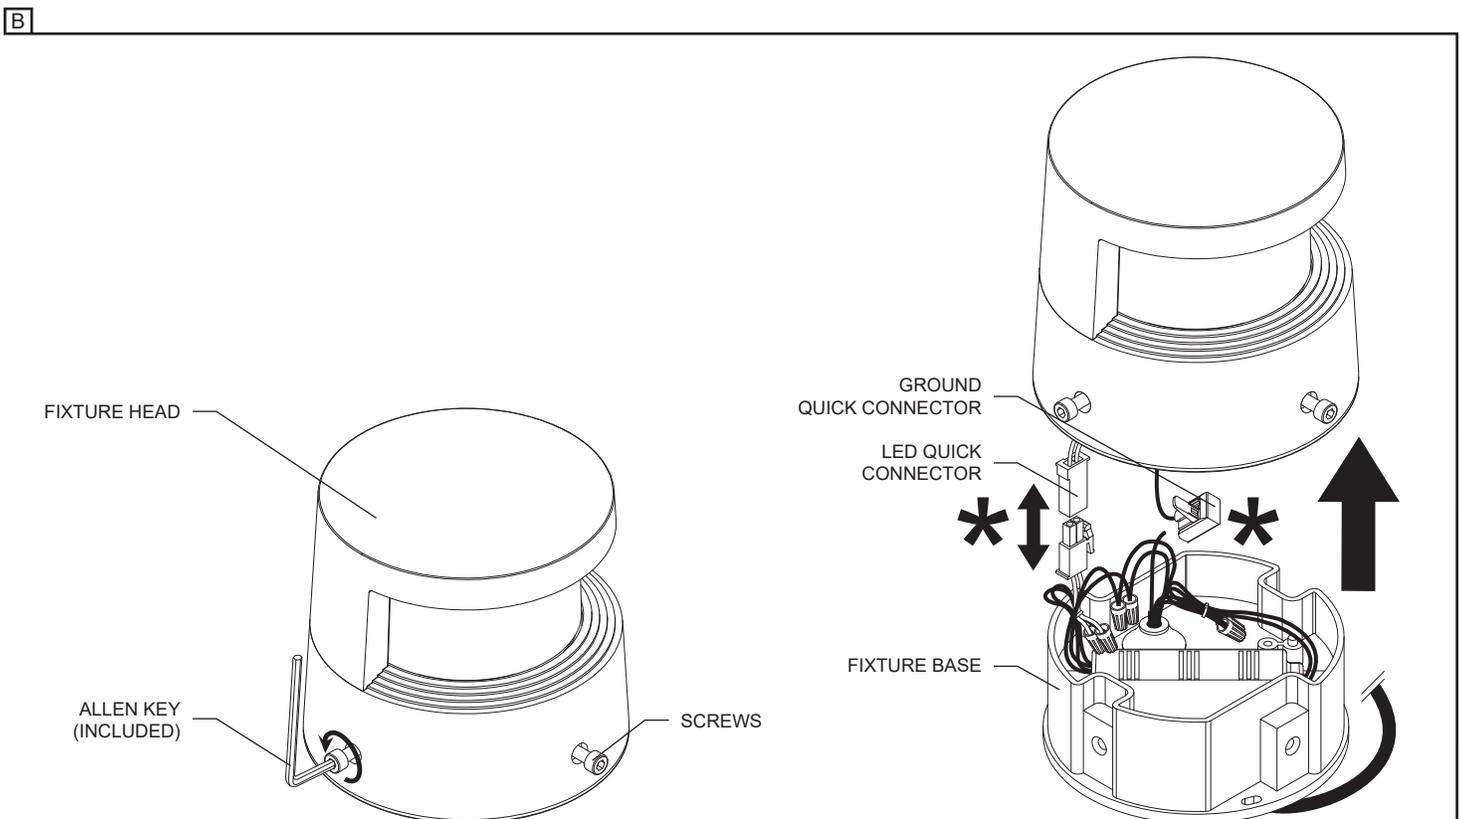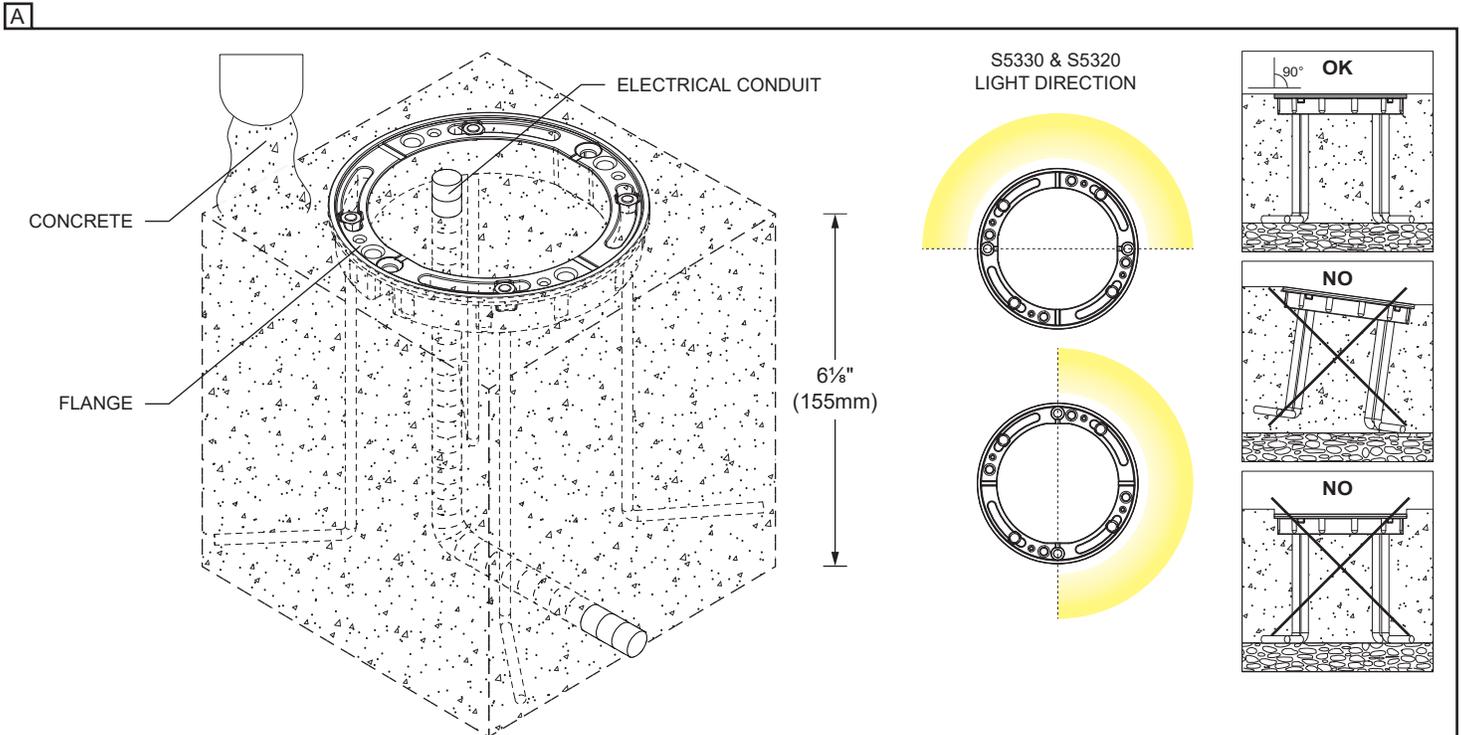


- C- PASS THE FEEDER CABLE THROUGH THE ELECTRICAL CONDUIT AND MAKE WIRE CONNECTIONS (**SEE WIRING DIAGRAM**) INSIDE A REMOTE JUNCTION BOX (**PROVIDED BY OTHERS**).
- D- FASTEN THE FIXTURE BASE TO THE FLANGE WITH THE (2) PHILLIPS SCREWS AND WASHERS (**INCLUDED**).
- E- RECONNECT THE GROUND WIRES USING THE QUICK CONNECTOR.
- F- RECONNECT THE LED QUICK CONNECTOR.
- G- FASTEN THE FIXTURE HEAD (4) SCREWS USING AN ALLEN KEY (**INCLUDED**).


**C + D**

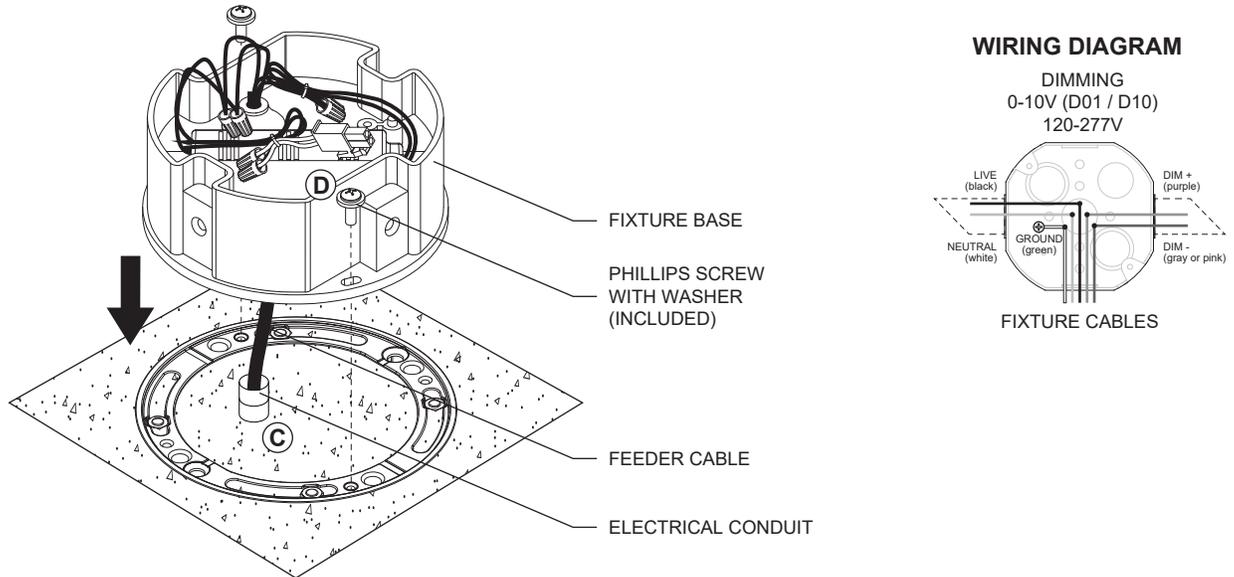

**E + F**

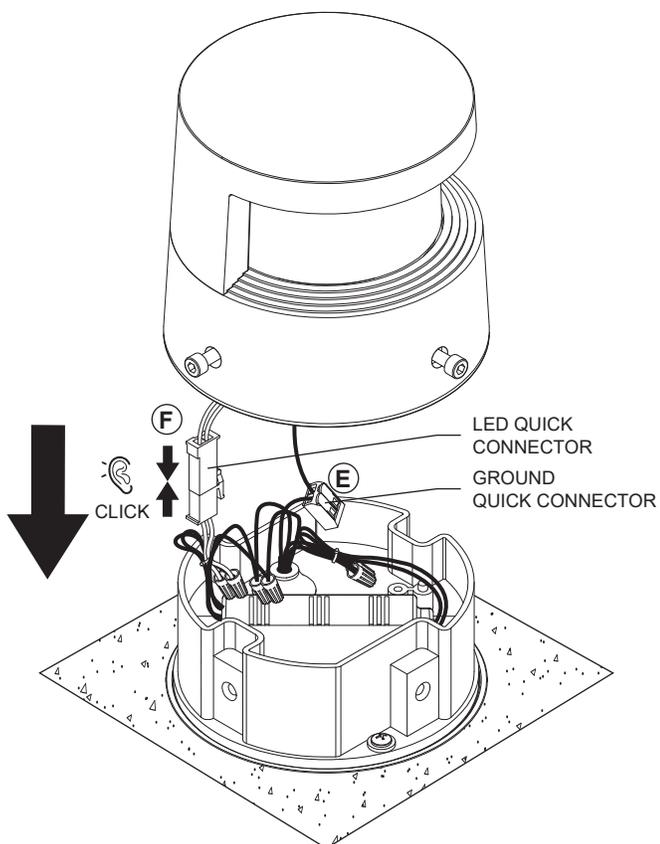


**G**

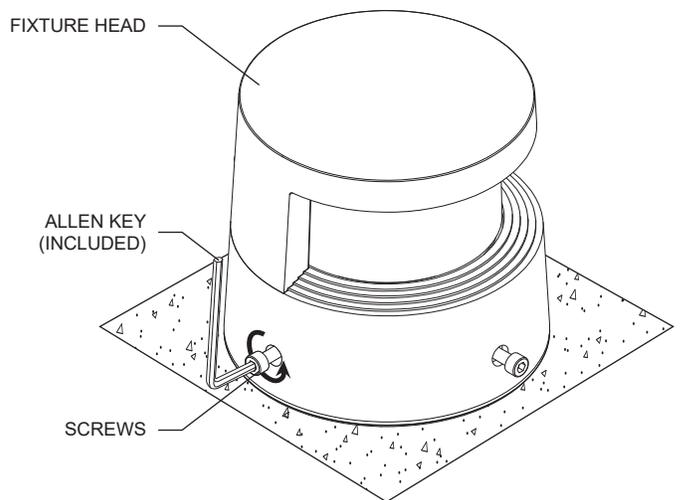


**GROUND INSTALLATION ON ALTERNATIVE SURFACE WITHOUT FLANGE.  
INTEGRAL DRIVER (120 / 277V)**

- A- UNFASTEN THE FIXTURE HEAD (4) SCREWS WITH AN ALLEN KEY (**INCLUDED**) AND REMOVE IT.  
\*BEFORE FULLY REMOVING THE FIXTURE HEAD, DISCONNECT THE LED AND GROUND QUICK CONNECTORS.
- B- PLACE THE FIXTURE BASE IN ITS DESIRED POSITION AND DRILL HOLES INTO THE SURFACE FOR #8 SCREWS.

**A**

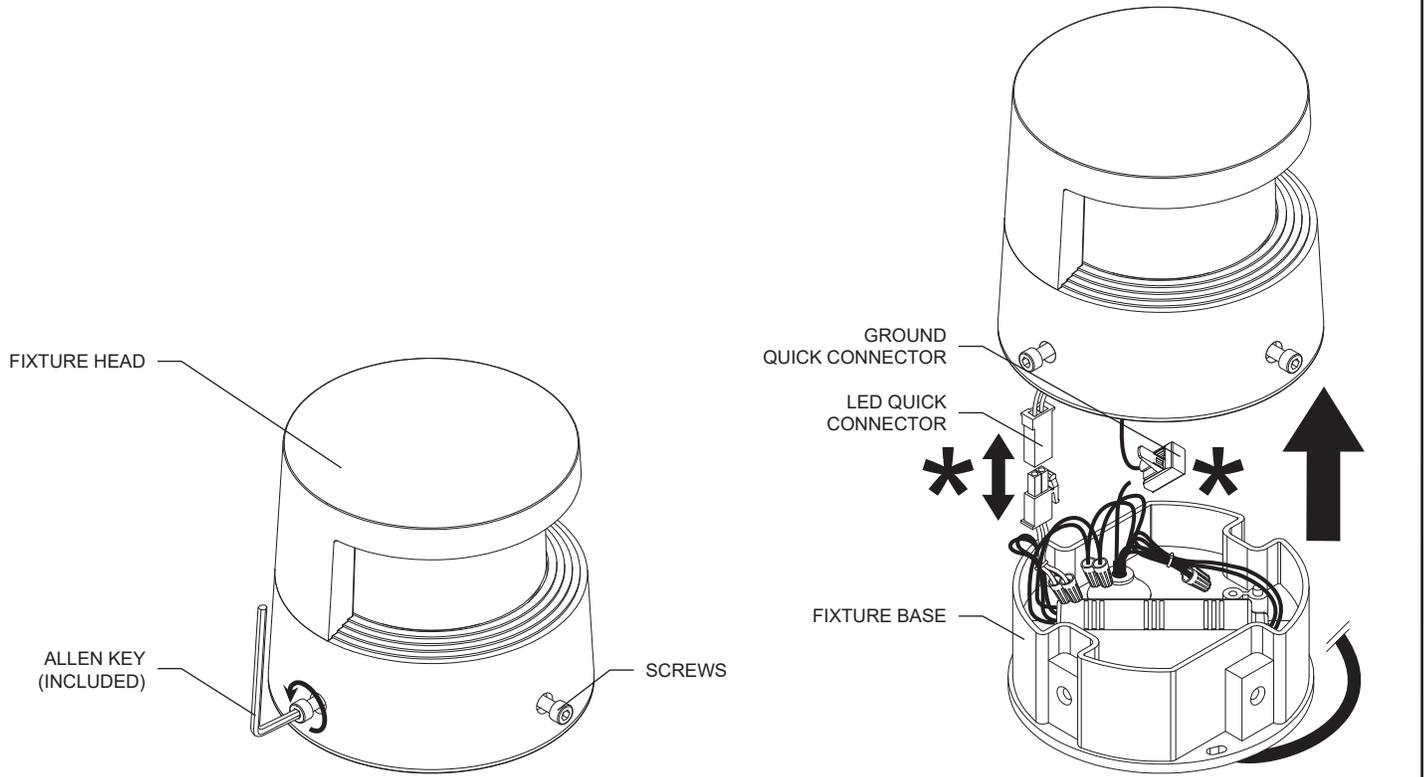

**B**

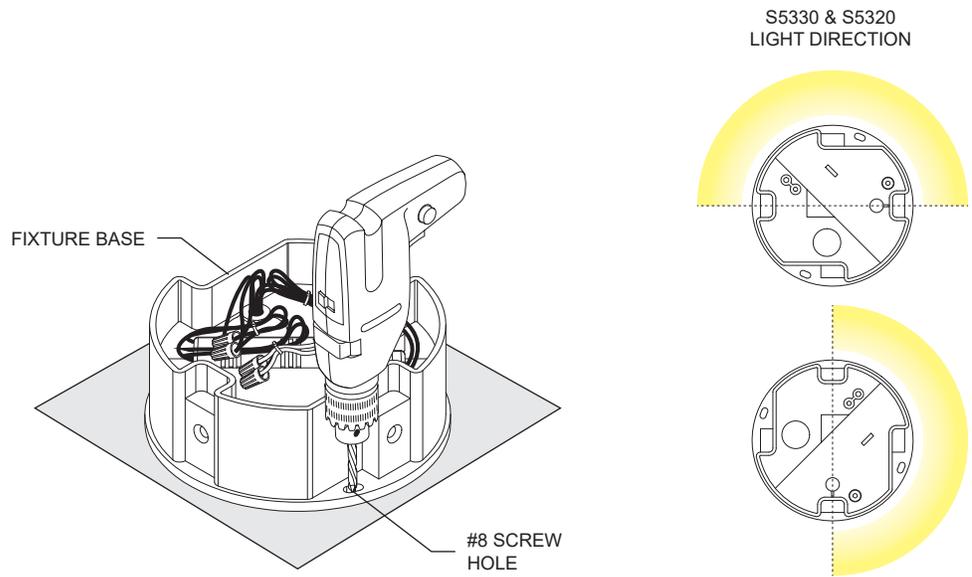

C- PASS THE FEEDER CABLE THROUGH THE ELECTRICAL CONDUIT AND MAKE WIRE CONNECTIONS (SEE WIRING DIAGRAM) INSIDE A REMOTE JUNCTION BOX (PROVIDED BY OTHERS).


D- FASTEN THE FIXTURE BASE TO THE SURFACE WITH (2) #8 ANCHOR SCREWS AND WASHERS (NOT INCLUDED).

E- RECONNECT THE GROUND WIRES USING THE QUICK CONNECTOR.


F- RECONNECT THE LED QUICK CONNECTOR.

G- FASTEN THE FIXTURE HEAD (4) SCREWS USING AN ALLEN KEY (INCLUDED).


**C + D**

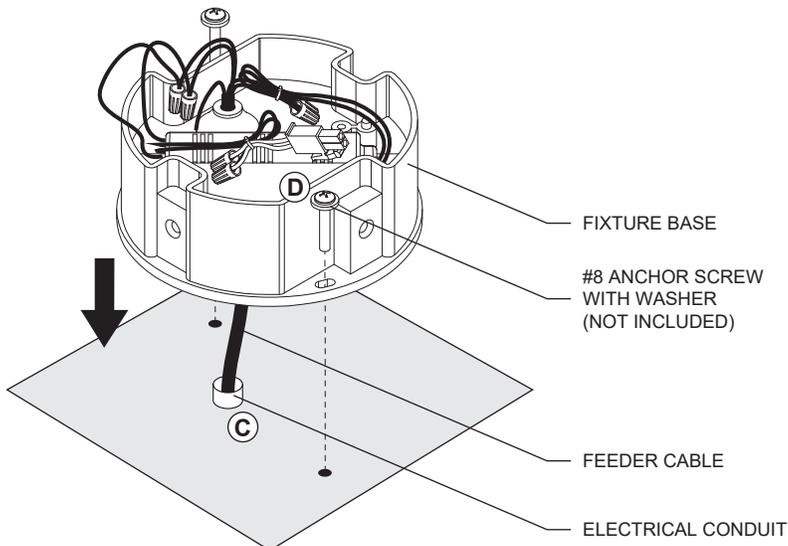


**WIRING DIAGRAM**

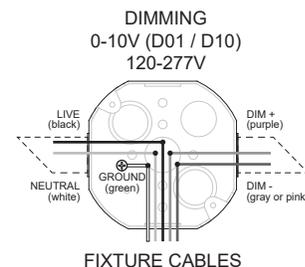

**E + F**

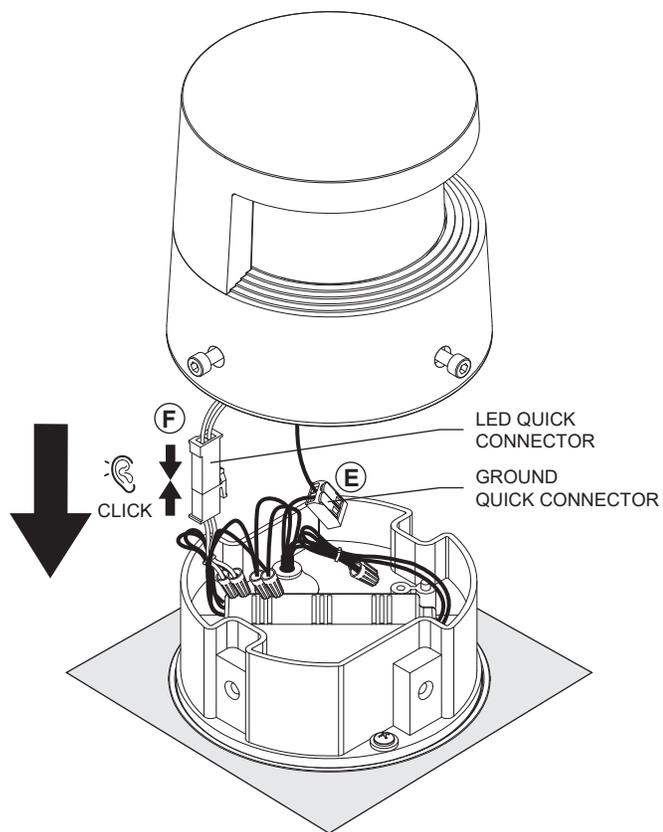

**G**

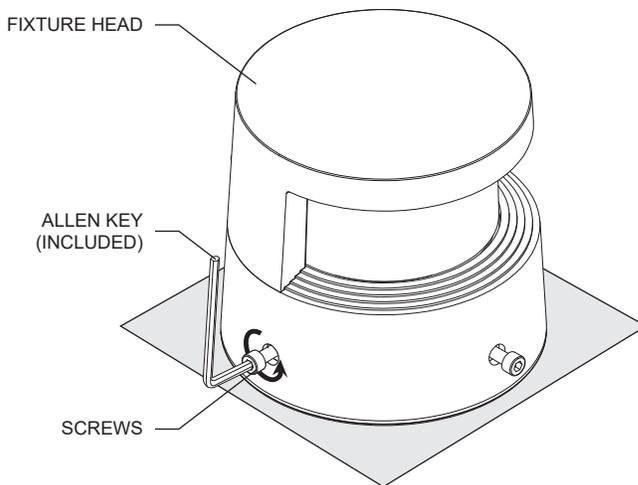

**GROUND INSTALLATION WITH STAKE (S3524).  
INTEGRAL DRIVER (120 / 277V)**


A- UNFASTEN THE FIXTURE HEAD (4) SCREWS WITH AN ALLEN KEY (**INCLUDED**) AND REMOVE IT.

\*BEFORE FULLY REMOVING THE FIXTURE HEAD, DISCONNECT THE LED AND GROUND QUICK CONNECTORS.


B- PASS THE FEEDER CABLE THROUGH THE STAKE'S CABLE ENTRY HOLE

C- ALIGN STAKE'S FIXING HOLES UNDER THE FIXTURE BASE AND SCREW IT ON USING (2) PHILLIPS SCREWS WITH WASHERS (**INCLUDED**).

**A**

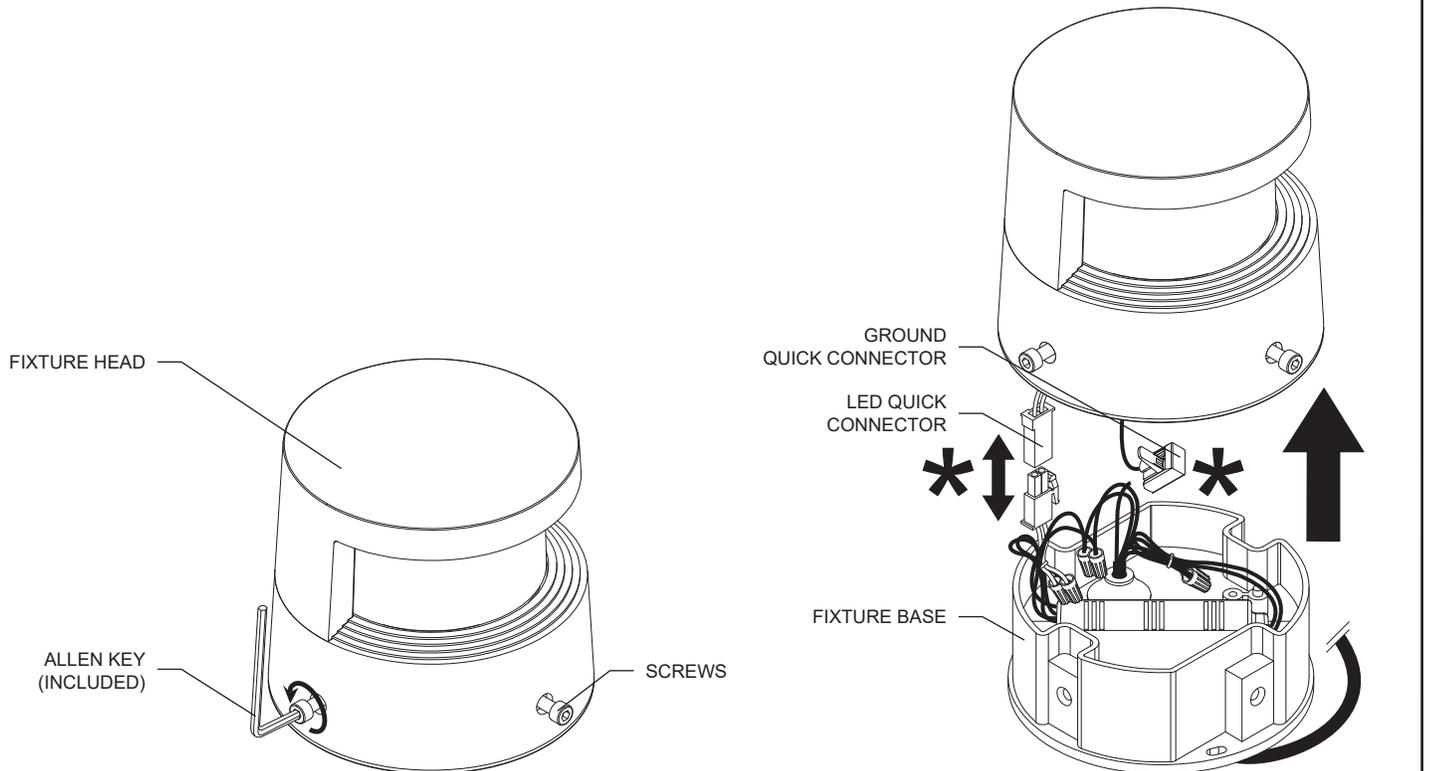


**B + C**

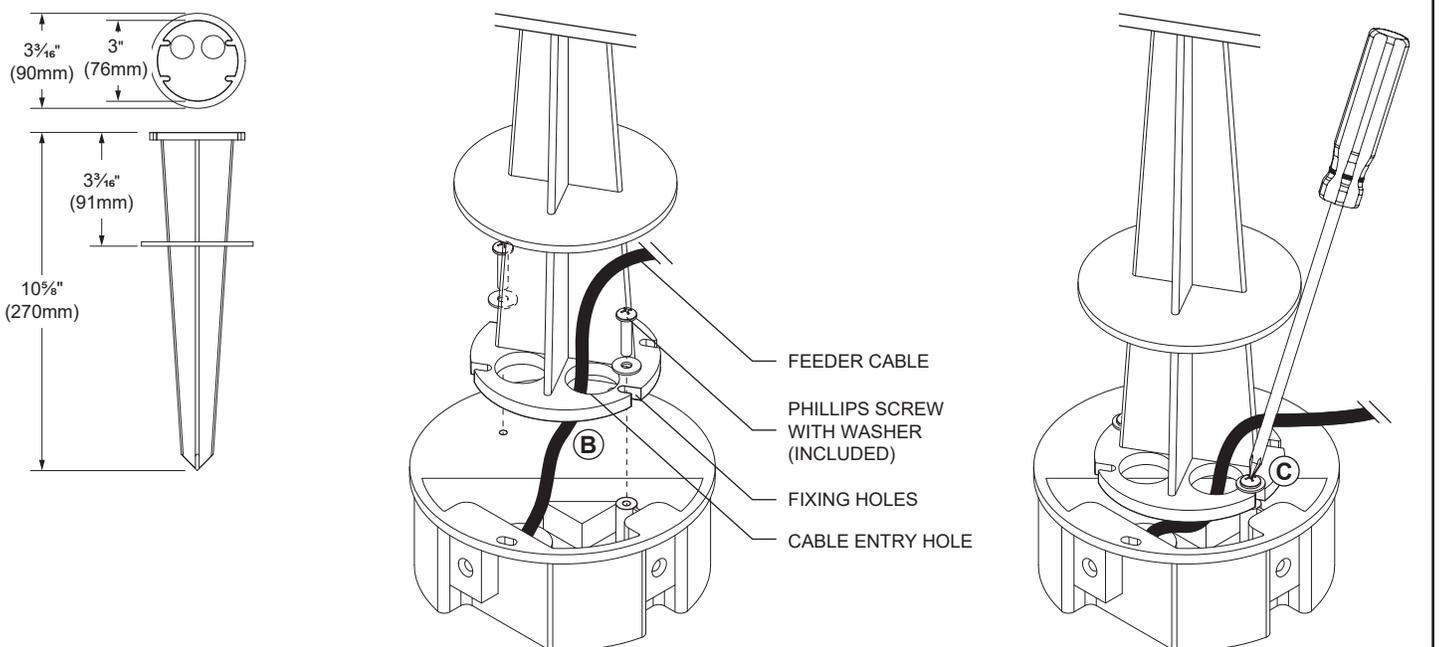


- D- 1- USE A RUBBER Mallet TO INSERT STAKE INTO THE GROUND.
- 2- INSERT STAKE TO THE FIRST DISC TO INSURE A LEVELED POSITION WITH THE GROUND.
- E- RECONNECT THE GROUND WIRES USING THE QUICK CONNECTOR.
- F- RECONNECT THE LED QUICK CONNECTOR.
- G- FASTEN THE FIXTURE HEAD (4) SCREWS USING AN ALLEN KEY (INCLUDED).
- H- BRING THE FEEDER CABLE TO THE JUNCTION BOX (SUPPLIED BY CONTRACTOR) AND MAKE WIRE CONNECTIONS (WIRING DIAGRAM) USING WATERTIGHT TWIST CONNECTORS (NOT INCLUDED).

**D**

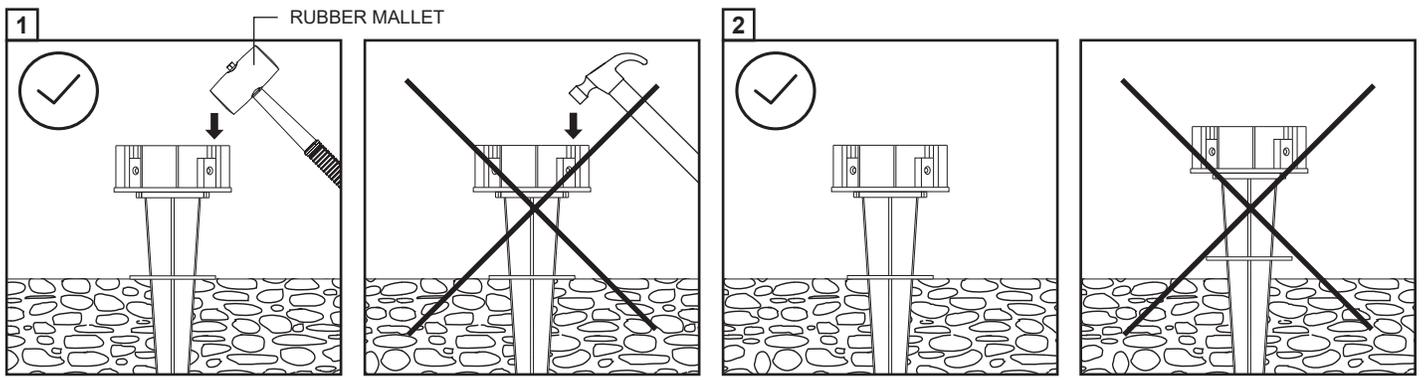

**E + F**

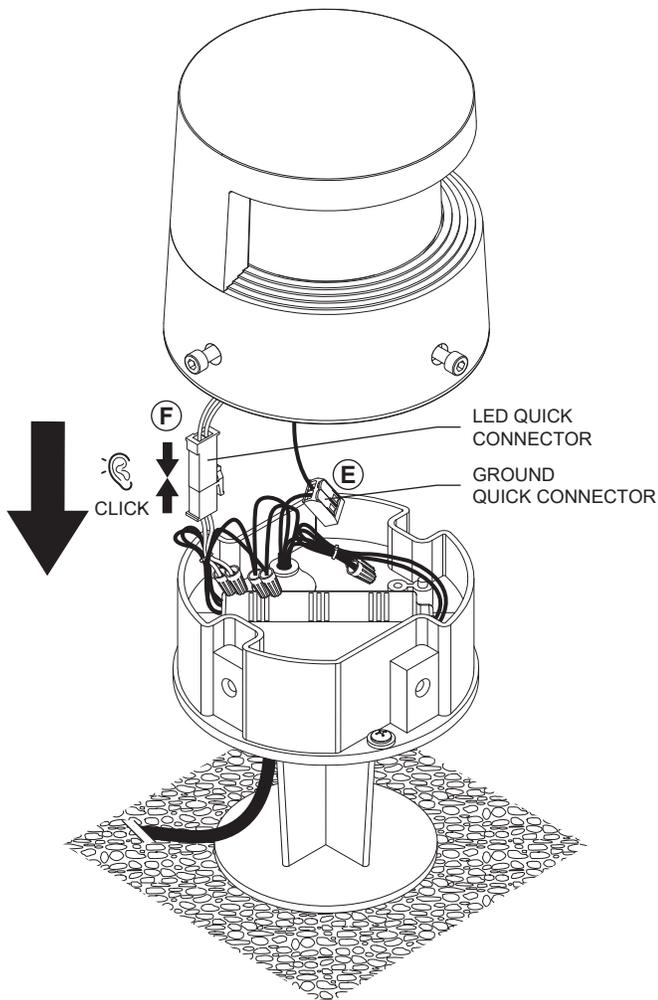

**G + H**

