



S7201W S7202W
SL9201W SL9202W

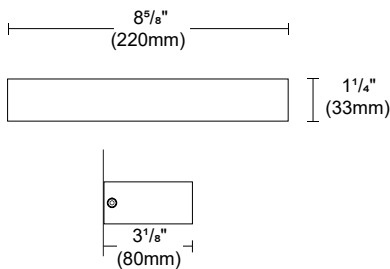

S7250W
S7252W

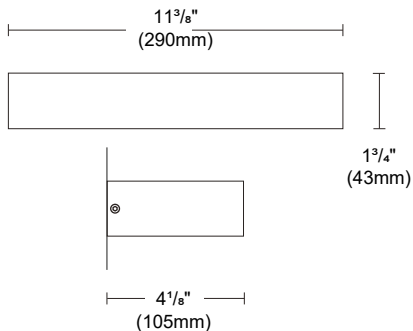

Wall mounted accent light luminaire with direct light distribution that provides ambient light on vertical surfaces. Suitable for exterior applications

MODEL	POWER (W)	OPTIC	LUMENS (lm)*	EFFICACY (lm/W)*	MAX CANDELA (cd)*
S7201W SL9201W	11W	Accent light	691	63	361
S7202W SL9202W	11W		662	60	165
S7250W	20W		1 113	56	567
S7252W			1 058	53	278

*For 3000K, 90CRI

Power can vary with the selected driver.

Source:

White LED module

2700K: 90CRI,

3000K: 90CRI,

4000K: 90CRI.

Lumen maintenance:

80% of initial lumens at 70 000 hours (L80 B10) Ta 77°F (25°C)

80% of initial lumens at 50 000 hours (L80 B10) Ta 104°F (40°C) (LM-80)

Optics:

Accent light, single or double emission.

Diffuser: Toughened glass.

Material:

Body: Die-cast aluminum and oiled teak wood.

Diffuser: Tempered glass.

Mounting plate: Aluminum.

Mounting:

See mounting options on page 4.

Electrical:

High efficiency electronic LED driver, rated at 50 000 hours, 120-277V. See page 3 for remote LED driver options.

Dimming:

Optional 0-10V (120-277V) and LTE (leading and trailing edge), down to 10% for integral version. 0-10V (120-277V) and LTE (leading and trailing edge), down to 1% for remote version only.

Finish:

White, aluminum gray, burnished bronze or anthracite gray painted finish, following a double powder paint in 3 step process: surface treatment containing ceramic nano particles (Bonderite). Epoxy primer paint. Polyester powder paint with high resistance against UV rays and harsh weather conditions. White and burnished bronze available with teak wood accent.

Standard finish



Weight:

Mini look: 1.87lb (0.85kg)

Look: 3.3lb (1.5kg)

Warranty:

5 year limited warranty.

Ratings:

IP65, IK06 for Minilook, IK04 for Look

Certification:



cULus listed for wet location

ORDERING INFO

- - - -
FIXTURE



MODEL

- | | | |
|---|--|---|
| <input type="checkbox"/> S7201 - Mini look | <input type="checkbox"/> S7202 - Mini look double | <input type="checkbox"/> S7250 - Look |
| <input type="checkbox"/> SL9201 - Mini look wood | <input type="checkbox"/> SL9202 - Mini look double wood | <input type="checkbox"/> S7252 - Look double |

LED

- | | | |
|--|--|--|
| <input type="checkbox"/> H - 2700K, 90CRI | <input type="checkbox"/> W - 3000K, 90CRI | <input type="checkbox"/> N - 4000K, 90CRI |
|--|--|--|

MOUNTING

- | | | |
|--|--|---|
| <input type="checkbox"/> DF - Surface mounted
with direct feed | <input type="checkbox"/> JB - Surface mounted
junction box | <input type="checkbox"/> J2 - Surface mounted
single gang box |
|--|--|---|

VOLTAGE

- | | |
|--|--|
| <input type="checkbox"/> UNV - 120-277V | <input type="checkbox"/> REM - Remote |
|--|--|

FINISH

- | | | | |
|--|---|---|--|
| <input type="checkbox"/> 01 - White | <input type="checkbox"/> 14 - Aluminum | <input type="checkbox"/> 20 - Burnished bronze | <input type="checkbox"/> 24 - Anthracite gray |
|--|---|---|--|

DIMMING

- | | |
|---|--|
| <input type="checkbox"/> ND - No dimming | <input type="checkbox"/> D10 - 0-10V ¹ |
|---|--|

¹ For model S7250 and S7252, the driver can achieve LTE (Leading and trailing edge) in 120V.

REMOTE POWER SUPPLY OPTION
(TO BE ORDERED SEPARATELY)


OUTDOOR RATED Driver box model	Max distance**	Min-max units	
		MINILOOK8.4W S7201, S7202, SL9201, SL9202	LOOK16.9W* S7250, S7252
4549-0024-060-UNV-ND	60ft (18m)	1-6	1-3
4549-0024-060-UNV-D10			
4549-0024-090-UNV-ND	40ft (12m)	1-10	1-5
4549-0024-090-UNV-D10			
4551-0024-080-120-LTE	45ft (13m)	3-9	1-4

INDOOR RATED Driver box model	Max distance**	Min-max units	
		MINILOOK8.4W S7201, S7202, SL9201, SL9202	LOOK16.9W* S7250, S7252
4448-0024-060-UNV-ND	60ft (18m)	1-6	1-3
4448-0024-060-UNV-D10			
4448-0024-090-UNV-ND	40ft (12m)	1-10	1-5
4448-0024-090-UNV-D10			


* Wattage requirement for one (1) fixture (Remote fixture only).
**Considering 2V drop with 18AWG cable. Consult factory for longer remote distance.

MOUNTING OPTIONS


MINI LOOK / MINI LOOK DOUBLE / MINI LOOK WOOD S7201 / S7202 / SL9201 / SL9202

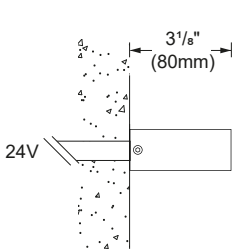


DF-REM - Direct feed with remote power supply.
Connections made inside fixture (18AWG only). Ø3/8" power cable. Installed directly to surface.

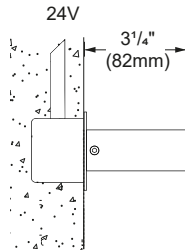

J2-REM - 2" junction box with remote power supply.
Mounting adapter plate for junction box installation.
Min 1 1/2" (38mm) deep

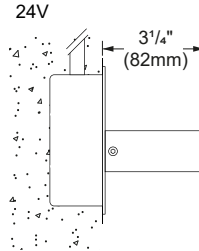


JB-REM - 4" junction box with remote power supply.
Mounting adapter plate for junction box installation.
Min 1 1/2" (38mm) deep.

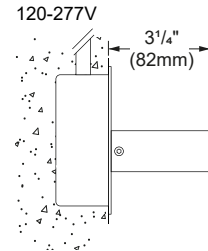


JB-UNV - 4" junction box with integral power supply.
Mounting adapter plate for junction box installation.
Min 1 1/2" (38mm) deep.

LOOK / LOOK DOUBLE S7250 / S7252

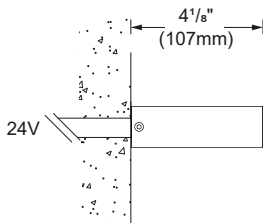


DF-REM - Direct feed with remote power supply.
Connections made inside fixture (18AWG only). Ø3/8" power cable. Installed directly to surface.

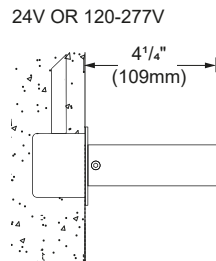


J2-REM - 2" junction box with remote power supply.
Mounting adapter plate for junction box installation.
Min 1 1/2" (38mm) deep

J2-UNV - 2" junction box with integral power supply.
Mounting adapter plate for junction box installation.
Min 1 1/2" (38mm) deep

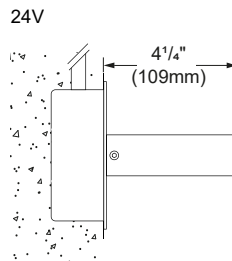


JB-REM - 4" junction box with remote power supply.
Mounting adapter plate for junction box installation.
Min 1 1/2" (38mm) deep.

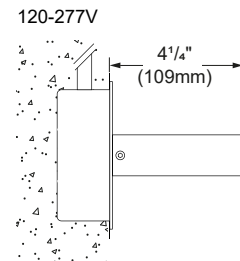


JB-UNV - 4" junction box with integral power supply.
Mounting adapter plate for junction box installation.
Min 1 1/2" (38mm) deep.

DIMENSIONS

MINI LOOK / MINI LOOK DOUBLE / MINI LOOK WOOD
S7201 / S7202 / SL9201 / SL9202

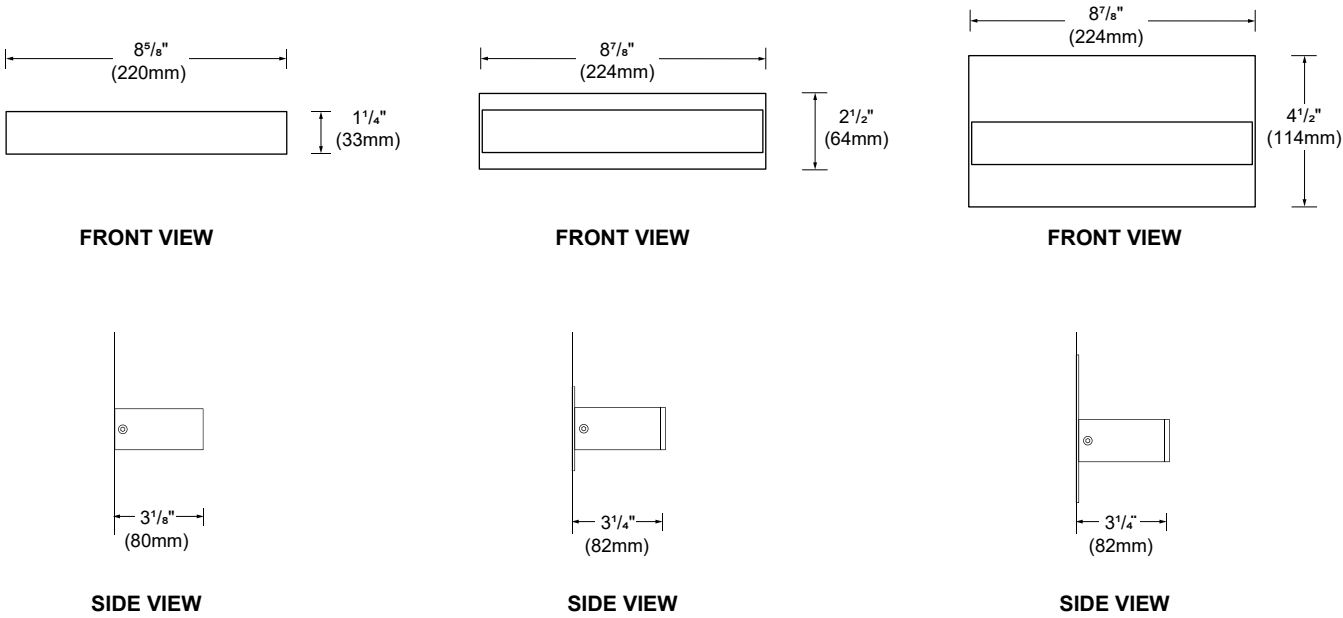

LOOK / LOOK DOUBLE
S7250 / S7252

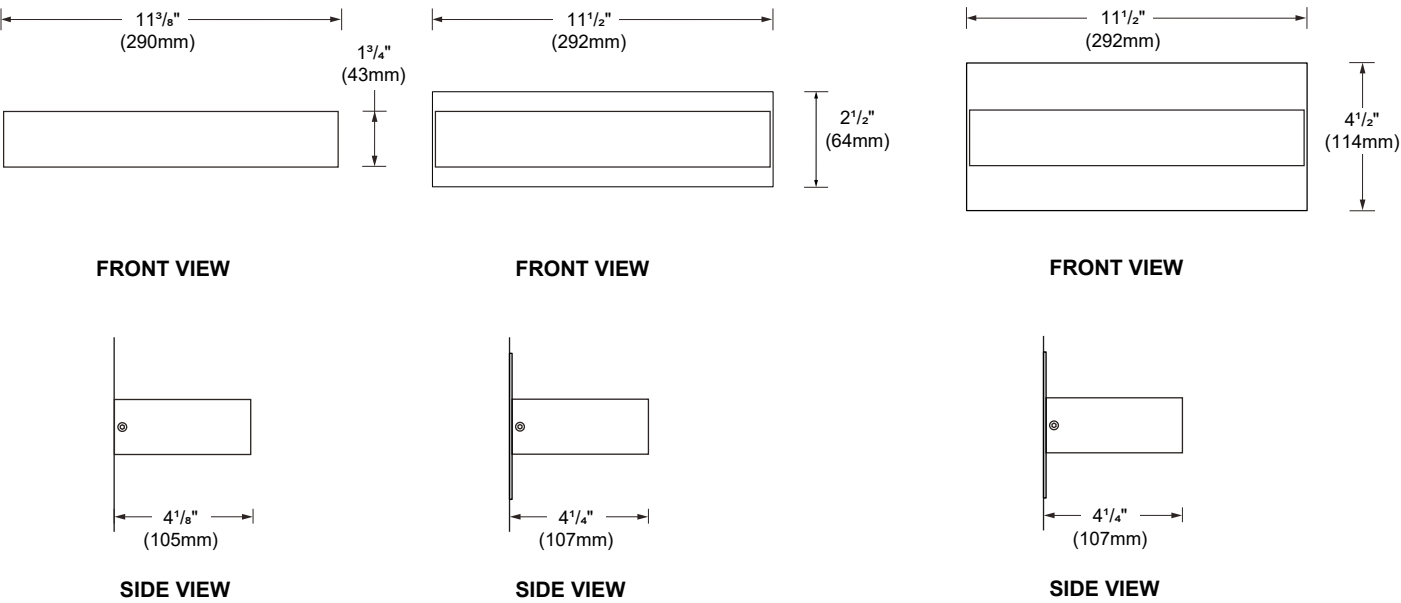

PHOTOMETRIC DATA


Visit sistemalux.com for complete photometric data.

Mini Look




CCT (K)	CRI	POWER (W)*	OPTIC	LUMENS (lm)	EFFICACY (lm / W)	MAX CANDELA (cd)	BUG	MODEL
3000K	90	11W	Accent light	691	63	361	B1 U0 G1	S7201W
								SL9201W

*Wattage given for integral version. For products that uses a remote led driver, total system wattage will varies according to the efficacy of the remote led driver selected.

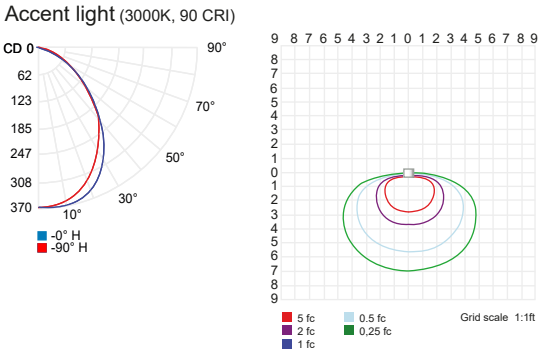


Mini Look double




CCT (K)	CRI	POWER (W)*	OPTIC	LUMENS (lm)	EFFICACY (lm / W)	MAX CANDELA (cd)	MODEL
3000K	90	11W	Accent light	662	60	165	S7202W
							SL9202W

*Wattage given for integral version. For products that uses a remote led driver, total system wattage will varies according to the efficacy of the remote led driver selected.

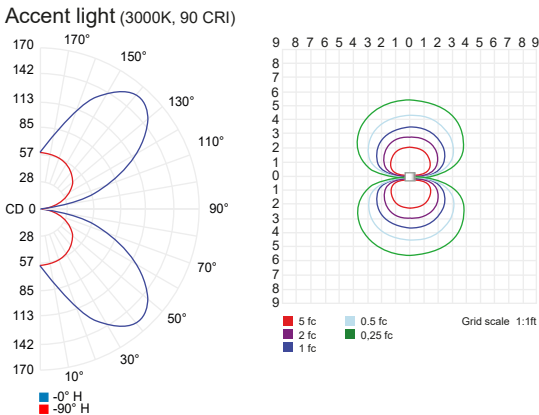



CCT options	2700K	3000K	4000K
CRI options	90CRI	90CRI	80CRI
Multiplier	0.97	1	1.02

PHOTOMETRIC DATA
Visit sistimalux.com for complete photometric data.




CCT (K)	CRI	POWER (W)*	OPTIC	LUMENS (lm)	EFFICACY (lm / W)	MAX CANDELA (cd)	BUG	MODEL
3000K	90	20W	Accent light	1 113	56	567	B1 U0 G1	S7250W

*Wattage given for integral version. For products that uses a remote led driver, total system wattage will varies according to the efficacy of the remote led driver selected.

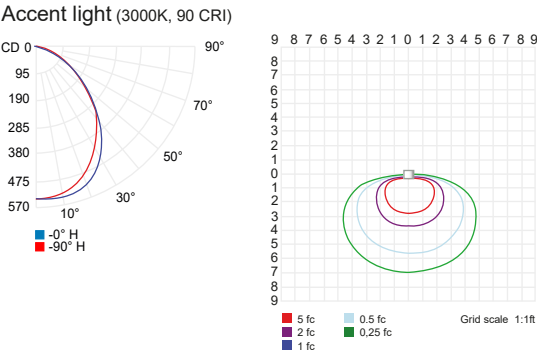

CCT (K)	CRI	POWER (W)*	OPTIC	LUMENS (lm)	EFFICACY (lm / W)	MAX CANDELA (cd)	MODEL
3000K	90	20W	Accent light	1 058	53	278	S7252W

*Wattage given for integral version. For products that uses a remote led driver, total system wattage will varies according to the efficacy of the remote led driver selected.

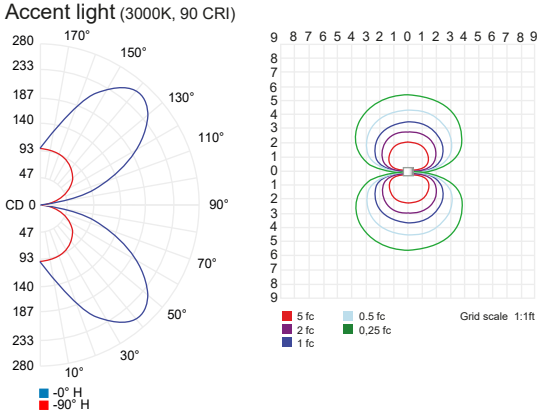

CCT options	2700K	3000K	4000K
CRI options	90CRI	90CRI	90CRI
Multiplier	0.97	1	1.02