

Project name: _____

Type: _____



Wall mounted projector with a minimal design. Suitable for exterior applications.

Luminaire characteristics:

Power input: 8W

Lumens: 500 to 535 lm (delivered for 3000K)

Luminaire efficacy: 63 lm/W to 67 lm/W (for 3000K)

Source: White LED, (LM-80 tested).

3000K: 90CRI.

4000K: 90CRI.

Lumen maintenance: 70% of initial lumens at 50 000 hours (L70), (LM-79 tested).

Optics: Available in narrow spot and narrow flood optics. With rotation around 3 axis.

Materials:

Body: Die-cast aluminum.

Diffuser: Tempered glass.

Hardware: Silicone gasket and stainless steel screws.

Mounting plate: Aluminum.

Electrical: Universal high efficiency electronic power supply, rated at 50000 hours, 120-277V.

Mounting:

Wall or ceiling mounted with 4" junction box or single gang switch box.

Floor mounted with bracket (3' cable included).

Ground mounted with bracket and/or stake (3' cable included).

Finish: White or Aluminum gray.


Weight: 3.3lb (1.5kg).

Warranty: 5 year limited warranty.


Certification: cULus listed for wet location.

Ratings: IP65, IK07

Dimensions for mounting on 4" Junction box




FRONT VIEW




SIDE VIEW

Dimensions for mounting on single gang box



FRONT VIEW



SIDE VIEW



Project name: _____

Type: _____

TECHNICAL DATA

Visit sistimalux.com for complete photometric data.

LOAD (W)	CCT (K)	CRI	OPTIC	LUMENS (lm)	EFFICACY (lm / w)	MAX CANDELA (cd)	MODEL
8W	3000K	90	Narrow spot	535	66	12 475	S1500W
			Narrow flood	500	62	2 600	S1501W

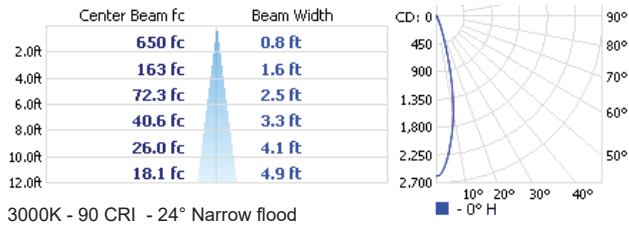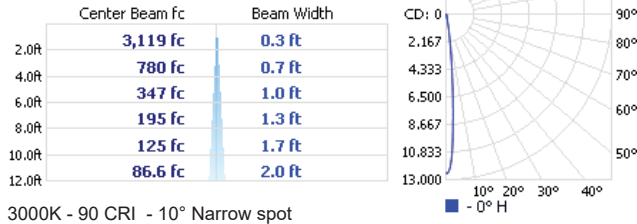

Project name: _____

Type: _____

ACCESSORIES (TO BE ORDERED SEPARATELY)

Stake for ground installation with 3' cable.
Must be used with S1509 for ground installation (see below).
*Fixture whip (FW) mounting only

- S1014**



Bracket for vertical installation on floor with 3' cable.
*Fixture whip (FW) mounting only

- S1509-01** - White
- S1509-14** - Aluminum gray



ORDERING INFO

MODEL	MOUNTING	ELECTRICAL	FINISH
<ul style="list-style-type: none"> <input type="radio"/> S1500N - 4000K, narrow spot <input type="radio"/> S1500W - 3000K, narrow spot <input type="radio"/> S1501N - 4000K, narrow flood <input type="radio"/> S1501W - 3000K, narrow flood 	<ul style="list-style-type: none"> <input type="radio"/> J2 - Surface mounted with single gang box <input type="radio"/> JB - Surface mounted with 4" junction box <input type="radio"/> FW - Fixture whip for floor or ground installation 	<ul style="list-style-type: none"> <input checked="" type="radio"/> UNV - 120-277V 	<ul style="list-style-type: none"> <input type="radio"/> 01 - White <input type="radio"/> 14 - Aluminum gray