

IMPORTANT - READ CAREFULLY BEFORE INSTALLING FIXTURE. RETAIN THESE INSTRUCTIONS FOR FUTURE REFERENCE.

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE NATIONAL ELECTRICAL CODE AND ALL APPLICABLE LOCAL CODES, BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT, AND THE HAZARDS INVOLVED. PROPER GROUNDING IS REQUIRED FOR SAFETY.

⚠ DISCONNECT THE MAIN LINE BEFORE WIRING SECONDARY CONNECTORS.

BASIK INSTALLATION (IC/CP)

A- MAKE ALL NECESSARY CONNECTIONS USING THE QUICK CONNECTORS (INCLUDED).




B- HOLD THE (2) CLIPS UPWARD AND INSERT FIXTURE INTO CUT-OUT. ONCE INSERTED INTO THE FRAME, RELEASE THE CLIPS.

C- **FIXTURE ANGLE ADJUSTMENTS:**

- 1- ROTATE THE LENS CASE AND PULL AWAY FROM FIXTURE BODY.
- 2- USE YOUR FINGER OR A FLAT SCREWDRIVER TO ADJUST THE TILT OF THE LUMINAIRE (UP TO 45° TILT & UP TO 355° ROTATION).
- 3- REINSTALL THE LENS CASE AND REFLECTOR IN THE FIXTURE. MAKE SURE THE LENS CASE HOLE IS PROPERLY ALIGNED WITH THE FIXTURE NOTCH.

***STEPS TO REPLACE THE OPTIC REFLECTOR. (REFER TO STEP C FOR REMOVING LENS CASE)**

- 4- TURN THE REFLECTOR UNTIL THE LENS CASE AND REFLECTOR NOTCHES ARE ALIGNED.
- 5- PULL THE REFLECTOR OFF OF THE LENS CASE.
- 6- REPLACE THE REFLECTOR AND REASSEMBLE FIXTURE.

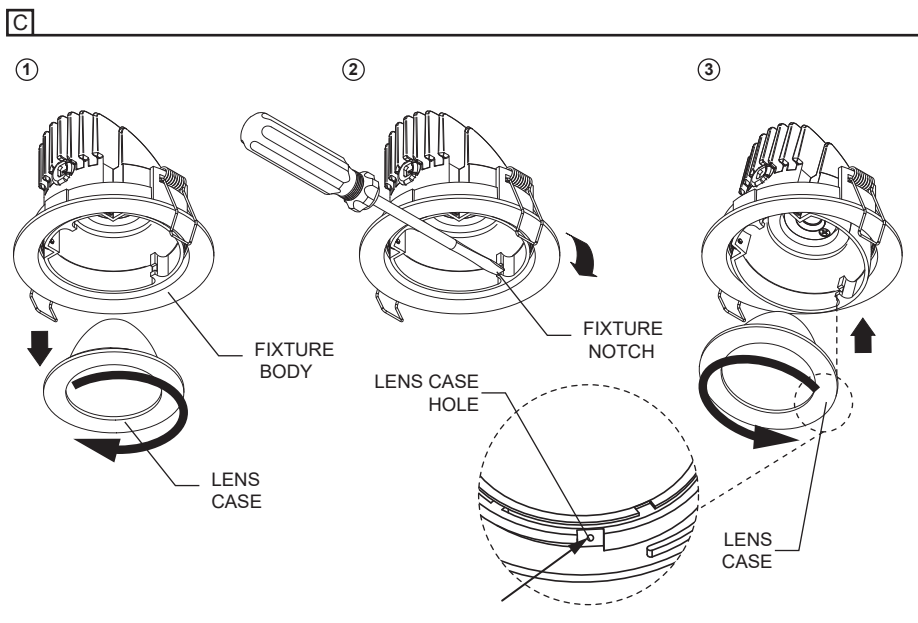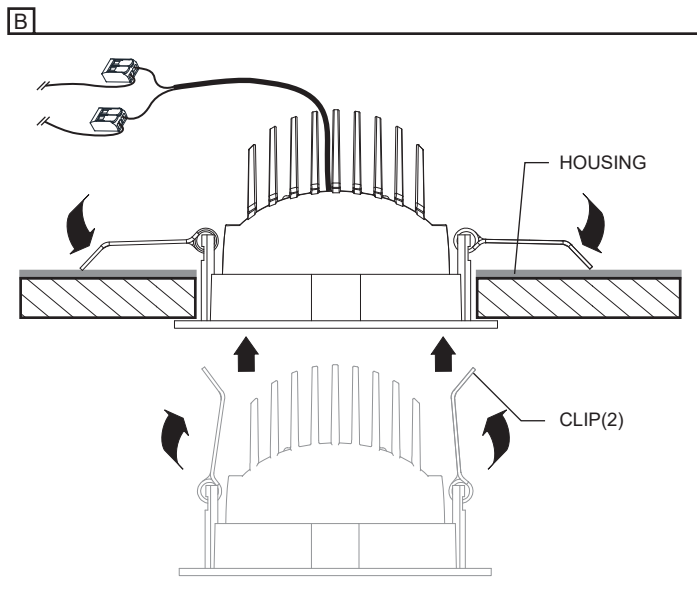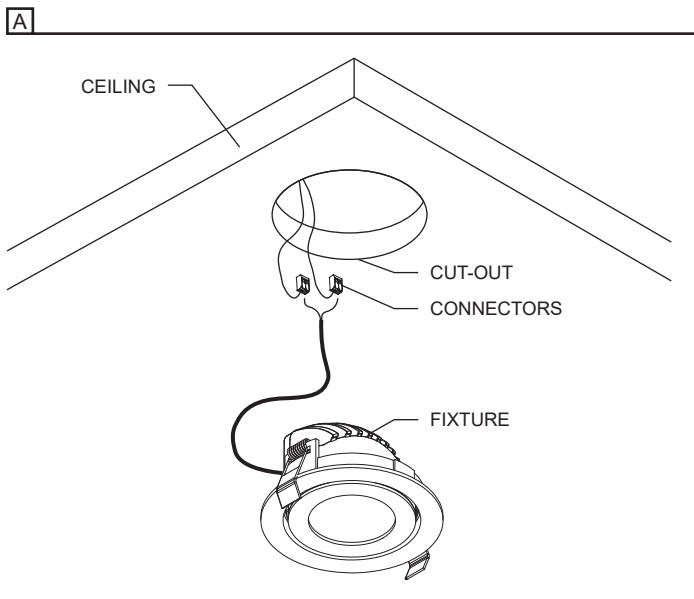

OPTIC REFLECTOR REPLACEMENT

