



Small but powerful: with an aperture of just 3.6 mm, Filorail creates a futuristic impact where technology integrates imperceptibly with architecture to create a harmonious blend between innovation and design, meeting the needs of the people using these spaces yet without interfering with the aesthetic experience, and at the same time offering an advanced living context.

Material	Extruded aluminum / insulated copper conductor.
Mounting:	Recessed trim. If required, can be cut on site.
Electrical:	48V remote LED driver. Maximum 100W per feed. See remote LED driver options on page 6.
Dimming:	0-10V: All track heads will be controlled together. DALI: Track heads are individually addressable. See remote LED driver details on page 6.
Finish:	Track: White or black painted finish. Accessories: White or black color.
Weight:	L1.6 (500mm): 0.40lb (0.2kg) L3.3 (1000mm): 0.79lb (0.4kg) L6.6 (2000mm): 1.58lb (0.7kg) L9.8 (3000mm): 2.37lb (1.1kg)
Warranty:	5 year limited warranty.
Certification:	cULus listed for dry location

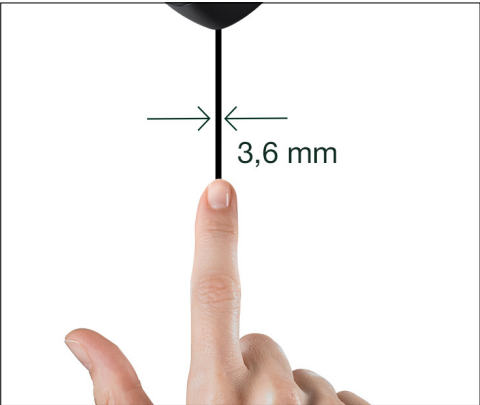


ORDERING INFO

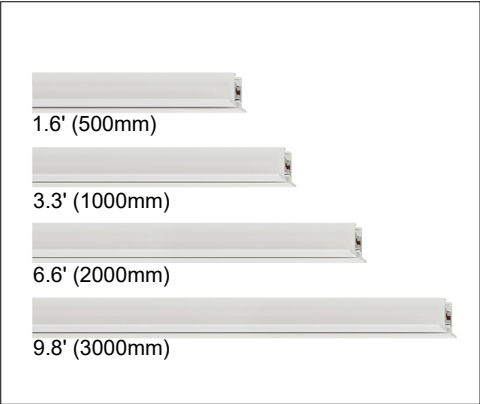

PRODUCT CODE					
MODEL	INSTALLATION	LENGTH (FT)	VOLTAGE	FINISH	
IFR Filorail DALI multi address / 0-10V single address	RT Recessed trim	L - Linear	48 48V	01 White <input type="checkbox"/>	
		L1.6 1'7/16" (500mm)		02 Black <input type="checkbox"/>	
		L3.3 3'3 3/8" (1000mm)			
		L6.6 6'6 3/4" (2000mm)			
		L9.8 9'10 1/8" (3000mm)			

COMPATIBLE TRACK HEADS FOR FILORAIL DALI MULTI ADDRESS / 0-10V SINGLE ADDRESS


LASER PENDANT

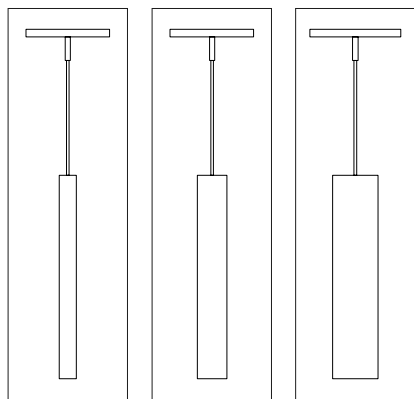

LBXS
PENDANT 1X

LBXS
PENDANT 4X

LBXS
PENDANT 9X




LBXS
PENDANT
Ø59mm (2⁹/₁₆"")
Ø75mm (2¹⁵/₁₆"")

NEWFO




NEWFO Ø88mm (3⁷/₁₆"")




NEWFO Ø116mm (4⁹/₁₆"")

LE PERROQUET




LE PERROQUET Ø55mm (2")




LE PERROQUET Ø80mm (3¹/₃"")

LE PERROQUET PENDANT




LE PERROQUET
PENDANT
Ø55mm (2")




LE PERROQUET
PENDANT
Ø80mm (3¹/₃"")

NEWFO PENDANT




NEWFO
PENDANT
Ø88mm
(3⁷/₁₆"")




NEWFO
PENDANT
Ø116mm
(4⁹/₁₆"")


PALCO LV



PALCO Ø51mm (2")




PALCO Ø62mm (2¹/₂"")




PALCO Ø86mm (3³/₈"")

ROBIN




ROBIN Ø37mm (1¹/₂"")




ROBIN Ø51mm (2")
Ø62mm (2¹/₂"")

LBXS DOWNLIGHT




LBXS
DOWNLIGHT 10X




LBXS
DOWNLIGHT 5X

MODEL AND MOUNTING


RECESSED TRIM




RECESSED MOUNTING ACCESSORIES FOR CEILING

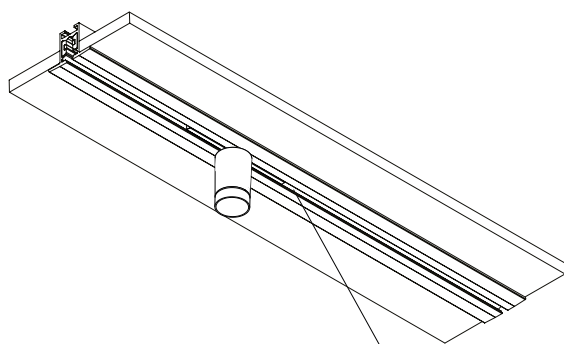


IPT71 - Mechanical/electrical straight joiner for surface/pendant/recessed trim version

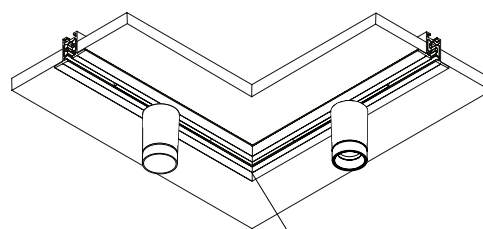

IPT74 - Mechanical/electrical corner joiner 90° ceiling/ceiling for surface/recessed trim version

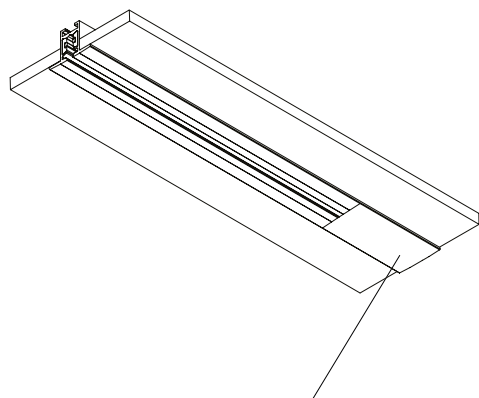

I395E - Feeder for trim recessed track

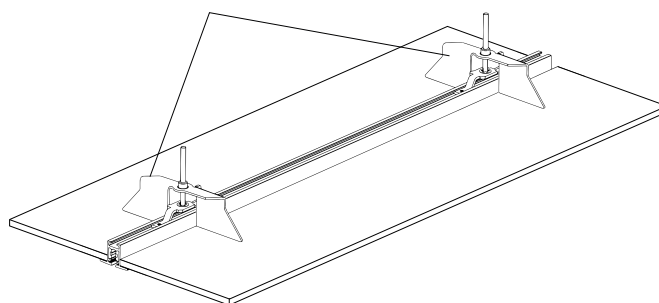


IPT66 - Pair of trim track securing brackets

ELECTRICAL RECESSED TRIM ACCESSORIES

(TO BE ORDERED SEPARATELY)


PAIR OF TRIM TRACK SECURING BRACKETS

☐ IPT66-00




MECHANICAL/ELECTRICAL STRAIGHT JOINER FOR SURFACE/ PENDANT/RECESSED TRIM VERSION

☐ IPT71-02



MECHANICAL/ELECTRICAL CORNER JOINER 90° CEILING/CEILING FOR SURFACE/RECESSED TRIM VERSION




☐ IPT74-02



FEEDER FOR TRIM RECESSED TRACK

☐ I395E-01

☐ I395E-02

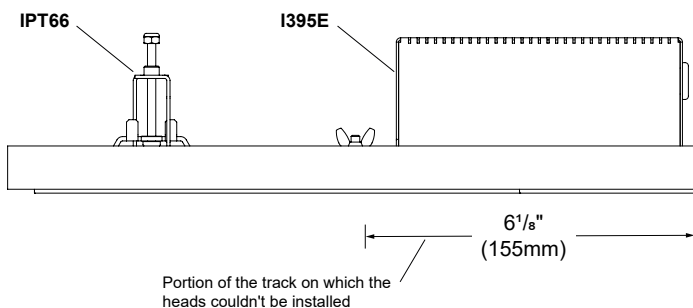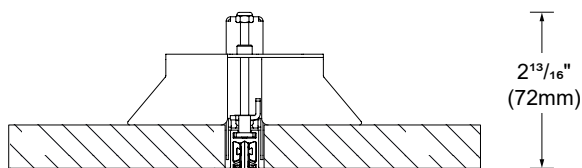

REMOTE LED DRIVER OPTIONS
(TO BE ORDERED SEPARATELY)
Requirement: Max 100W per circuit.

Watts	Min Watts	Voltage	Rated	Dimming protocol	Dimming range	Dimension	Max distance*
<input type="checkbox"/>	4451-0048-100-UNV-TDA						
100	-	120-277V	Indoor	DALI 1	Down to ±6%	18"x 4"x 4" (457 X 102 X 102mm)	65ft (20m)
<input type="checkbox"/>	4451-0048-100-UNV-TD10						
100	-	120-277V	Indoor	0-10V 2	Down to ±6%	18"x 4"x 4" (457 X 102 X 102mm)	65ft (20m)

* Calculated for an AWG18 cable.
1 Track heads are individually addressable.
2 All track heads will be controlled together.