

MULTIPLE SMALL SQUARE

MODEL : 81X8 - RF - D10 / LTE / DA / D3 / D2B

INSTRUCTIONS SHEET

PAGE: 1 of 2

IMPORTANT - READ CAREFULLY BEFORE INSTALLING FIXTURE. RETAIN THESE INSTRUCTIONS FOR FUTURE REFERENCE.

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE NATIONAL ELECTRICAL CODE AND ALL APPLICABLE LOCAL CODES, BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT, AND THE HAZARDS INVOLVED. PROPER GROUNDING IS REQUIRED FOR SAFETY.

⚠ DISCONNECT THE MAIN LINE BEFORE WIRING SECONDARY CONNECTORS.

REMODEL INSTALLATION (RF) INTEGRAL DRIVER (120V / 277V / 120-277V) DIMMING TRIAC/ELV OR 0-10V (15%)

A- MAKE CUT-OUT IN THE CEILING AS INDICATED (**SEE TABLE BELOW**).

B- REMOVE THE INNER RING BY TURNING COUNTER CLOCKWISE THEN UNCLIP THE CONNECTOR ASSEMBLY.

C- OPEN THE CONNECTION BOX BY LOOSENING THE COVER SCREW AND TURNING THE COVER AS SHOWN. INSTALL THE BX CABLE (**BY OTHERS**) IN THE CONNECTION BOX. MAKE ALL NECESSARY CONNECTIONS BETWEEN THE BRANCH CIRCUIT AND THE LUMINAIRE. AND THEN CLOSE CONNECTION BOX. *FOR OPTIONAL DIMMING 0-10V: WIRES MUST BE RUN THROUGH A SEPARATE CONNECTION BOX. (**SEE DRAWING BELOW**).


D- INSERT FIXTURE IN THE CUT-OUT, STARTING WITH THE WIRING BOX SIDE FIRST.

E- FASTEN WASHER & SCREW PARTIALLY TO ANCHOR KEY, LEAVING A SMALL GAP. INSERT ANCHOR KEYS (**X2 TYP.**) IN CROSS-SHAPED CUT-OUTS AT BOTH ENDS OF MULTIPLE SMALL ASSEMBLY.

F- SLIDE ALLEN HEAD SCREW ALONG SLOT, WHEN ANCHOR RESTS ON CEILING SURFACE, TIGHTEN WITH PROVIDED ALLEN HEAD KEY. **TO ENSURE THE FIXTURE IS TIGHTLY SECURED, PUSH FRAME UPWARDS AGAINST CEILING DURING INSTALLATION.**


IMPORTANT: PLEASE BE SURE TO ADD ADDITIONAL SUPPORT IF NEEDED IN ORDER TO SAFELY SECURE THE LUMINAIRE TO THE CEILING.

A




Model	Cut-out dimensions
8108	Ø 4¾" (Ø 121mm)
8118	4½" X 4½" (114 x 114mm)
8128	8½" X 4½" (216 x 114mm)
8138	12¼" X 4½" (311 x 114mm)
8148	8½" X 8½" (216 x 216mm)
8148L	16" X 4½" (406 x 114mm)
8168	23½" X 4½" (570 x 114mm)


B

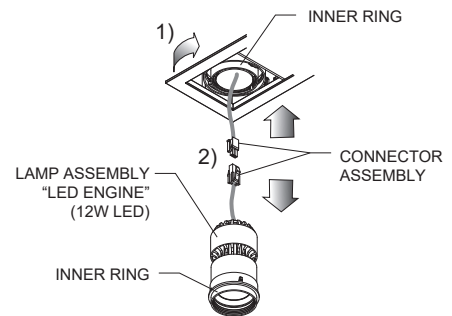


C

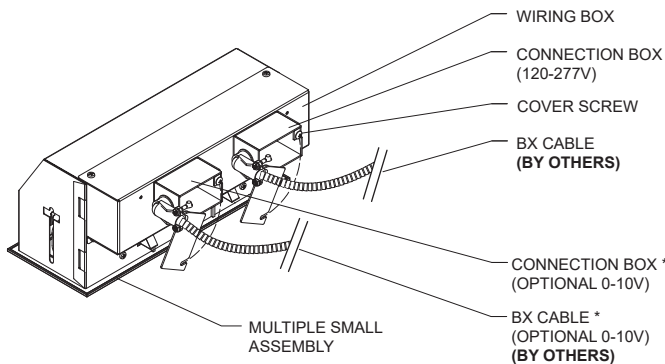


D

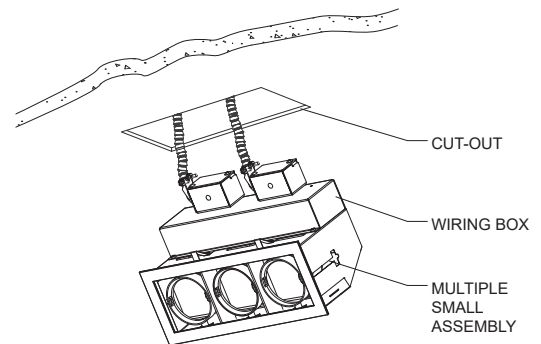

E

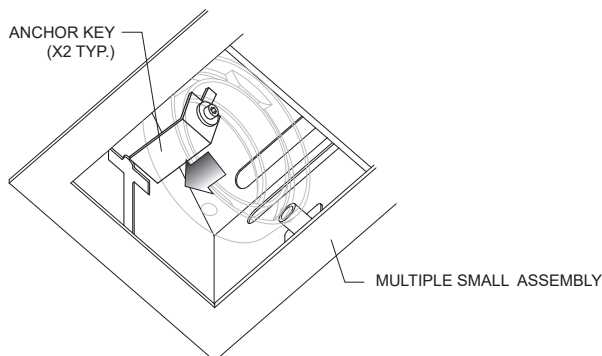

F

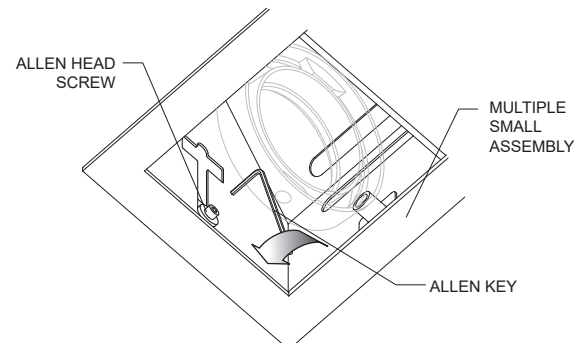

LAMP INSTALLATION

A- CLIP-IN THE TWO CONNECTORS TOGETHER.

B- PLACE INNER RING IN THE INTERMEDIATE RING BY ALIGNING THE TWO PINS WITH THE GAPS AND TURNING CLOCKWISE.

A + B

