


With its uniform light distribution and its rounded and thin profile, Pocket draws a gentle balance between shapes and light. The elegant and sober lines that characterize the whole range are further enhanced by the easy clip-on system and no visible screws. A surface mounted wall fixture with a minimalistic square and rectangular design that is able to blend into every architectural context.

<b>Luminaire characteristics:</b>	Power input: 9.9W to 27.4W (system wattage) Lumens: 682lm to 1886lm (for 3000K, 90CRI) Luminaire efficacy: Up to 70lm/W
<b>Source:</b>	LED Module (LM-80 tested) 2700K: 90CRI, 3000K: 90CRI, 4000K: 90CRI.
<b>Lumen maintenance:</b>	80% of initial lumens at 70 000 hours (L80) (LM-79).
<b>Optics:</b>	Accent light.
<b>Material:</b>	Body: Die-cast aluminum Diffuser: Toughened glass.
<b>Mounting:</b>	See mounting options on page 3
<b>Electrical:</b>	High efficiency electronic power supply, rated at 50 000 hours, 120-277V. For Mini model, See remote LED driver options on page 7.
<b>Dimming</b>	0-10V down to 10% (120-277V), for Mini model see page 7 for available remote options.
<b>Finish:</b>	White, aluminum or anthracite gray (RAL7022) painted finish, following a double powder paint in 3 step process: surface treatment containing ceramic nano particles (Bonderite). Epoxy primer paint. Polyester powder paint with high resistance against UV rays and harsh weather conditions.
<b>Weight:</b>	Minipocket: 2.84lb (1.29kg) Pocket: 4.38lb (1.99kg) Rectangular pocket: 4.40lb (2kg)
<b>Warranty:</b>	5 year limited warranty.
<b>Ratings:</b>	IP65, IK08
<b>Certification:</b>	 cULus listed for wet location

## ORDERING INFO

- - - -  
FIXTURE

## MODEL

- 
- S1851**
- Minipocket
- 
- S1861**
- Pocket
- 
- S1871**
- Pocket rectangular

## LED

- 
- H**
- 2700K, 90CRI
- 
- W**
- 3000K, 90CRI
- 
- N**
- 4000K, 90CRI

## MOUNTING

- 
- FW**
- Surface mounted with fixture whip
- <sup>(1)</sup>
- 
- JB**
- Surface mounted junction box
- 
- J2**
- Surface mounted single gang box
- <sup>(2)</sup>

## VOLTAGE

- 
- UNV**
- 120-277V
- <sup>(3)</sup>
- 
- REM**
- Remote
- <sup>(1)</sup>

## FINISH

- 
- 01**
- White
- 
- 14**
- Aluminum
- 
- 24**
- Anthracite gray

## DIMMING

- 
- D10**
- 0-10V

<sup>(1)</sup> Available with Mini Pocket (S1851).<sup>(2)</sup> Available with Pocket rectangular (S1871).<sup>(3)</sup> Available with Pocket (S1861) and Pocket rectangular (S1871).

**REMOTE LED DRIVER OPTIONS**  
(TO BE ORDERED SEPARATELY)

							<b>Minipocket S1851 9.9W*</b>
<b>Watts</b>	<b>Voltage</b>	<b>Rated</b>	<b>Dimming protocol</b>	<b>Dimming range</b>	<b>Dimension</b>	<b>Max distance**</b>	<b>Min-max units</b>
<input type="checkbox"/> <b>4448-0250-057-UNV-SD10</b>							
<b>57</b>	120-277V	Indoor	0-10V ELDOLED SOLOdrive	Down to ±0.1%	10" x 8" x 4" (254 x 203 x 102mm)	118ft(36m)	1-4, 4ch max 1/ch
<input type="checkbox"/> <b>4549-0250-057-UNV-SD10</b>							
<b>57</b>	120-277V	Outdoor	0-10V ELDOLED SOLOdrive	Down to ±0.1%	14.5" X 5" X 3.5" (368 X 127 X 89mm)	118ft(36m)	1-4, 4ch max 1/ch
<input type="checkbox"/> <b>4444-0250-010-120-LTE</b>							
<b>10</b>	120V	Indoor	leading and trailing edge (ELV and TRIAC)	Down to ±15%	6" x 4" x 3" (152 x 102 x 76mm)	30ft(9m)	1
<input type="checkbox"/> <b>4549-0250-013-UNV-ED10</b>							
<b>13</b>	120-277V	Outdoor	0-10V ELDOLED ECOdrive	Down to ±1%	14.5" X 5" X 3.5" (368 X 127 X 89mm)	118ft(36m)	1
<input type="checkbox"/> <b>4548-0250-010-UNV-D10</b>							
<b>10</b>	120-277V	Outdoor	0-10V	Down to ±10%	6" x 4.5" x 3" (152 x 114 x 76mm)	30ft(9m)	1
<input type="checkbox"/> <b>4444-0250-010-UNV-D10</b>							
<b>10</b>	120-277V	Indoor	0-10V	Down to ±10%	6" x 4" x 3" (152 x 102 x 76mm)	30ft(9m)	1
<input type="checkbox"/> <b>4450-0250-013-UNV-ED10</b>							
<b>13</b>	120-277V	Indoor	0-10V ELDOLED ECOdrive	Down to ±1%	8" X 8" X 4" (243 X 243 X 89mm)	118ft(36m)	1

\* Wattage requirement for one (1) fixture (Remote fixture only).


\*\* Contact factory for longer remote distance.

**DIMENSIONS**


**Mini Pocket**  
S1851



DF-REM



TOP VIEW



4 1/2"  
(115mm)

FRONT VIEW




1 1/2"  
(40mm)

SIDE VIEW

JB-REM




TOP VIEW



4 1/2"  
(115mm)

FRONT VIEW



1 3/4"  
(43mm)

SIDE VIEW


**Pocket**  
S1861



JB-UNV




TOP VIEW



6 1/4"  
(160mm)

6 1/4"  
(160mm)

FRONT VIEW



1 7/8"  
(48mm)

SIDE VIEW

**Pocket Rectangular**  
S1871



J2-UNV




TOP VIEW



2 7/8"  
(73mm)

10 3/4"  
(275mm)

FRONT VIEW




2 1/4"  
(56mm)

SIDE VIEW

JB-UNV




TOP VIEW

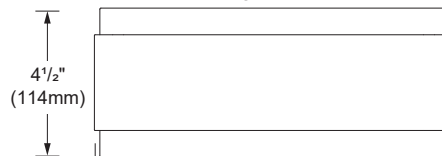

4 1/2"  
(114mm)

10 3/4"  
(275mm)

FRONT VIEW




2 1/4"  
(56mm)


SIDE VIEW

**MOUNTING OPTIONS**

**Mini Pocket**  
S1851



**FW-REM** - Fixture whip to remote power supply. Installed directly to surface with recessed pipe, exposed cable or electrical conduit.




**JB-REM** - 4" junction box with remote power supply. Mounting adapter plate for junction box installation. Min 1½" (38mm) deep

**Pocket**  
S1861




120- 277V




**JB-UNV** - 4" junction box with integral power supply. Mounting adapter plate for junction box installation. Min 1½" (38mm) deep

**Pocket Rectangular**  
S1871




120-277V



**J2-UNV** - 2" single gang box with integral power supply. Mounting adapter plate for junction box installation. Min 1½" (48mm) deep

120-277V



**JB-UNV** - 4" junction box with integral power supply. Mounting adapter plate for junction box installation. Min 1½" (38mm) deep

**PHOTOMETRIC DATA**

Visit [sistemalux.com](http://sistemalux.com) for complete photometric data.


**Minipocket**



CCT (K)	CRI	LOAD (W)*	OPTIC	LUMENS (lm)	EFFICACY (lm / W)	MAX CANDELA (cd)	MODEL
3000K	90	9.9W	Accent light	682	68	166	S1851W

\*For products that uses a remote led driver, total system wattage will varies according to the efficacy of the remote led driver selected. For this reason, the load and efficacy values given in the table above refers to the led source only and does not include the led driver consumption. Use multiplier table for other CCT and CRI output data. Efficacy based on IESNA LM-79 test reports.

Accent light (3000K, 90CRI)

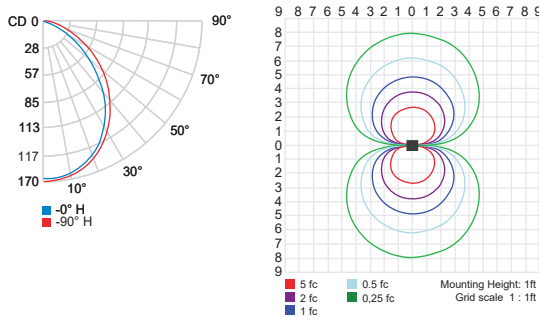


**Pocket**



CCT (K)	CRI	LOAD (W)	OPTIC	LUMENS (lm)	EFFICACY (lm / W)	MAX CANDELA (cd)	MODEL
3000K	90	19.4W	Accent light	1 362	70	312	S1861W

Use multiplier table for other CCT and CRI output data. Efficacy based on IESNA LM-79 test reports.

Accent light (3000K, 90CRI)

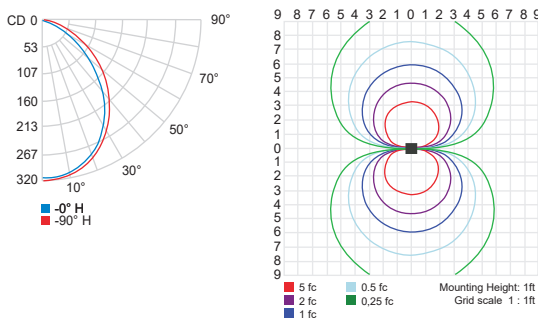

CCT options	2700K	3000K	4000K
CRI options	90CRI	90CRI	90CRI
<b>Multiplier</b>	<b>0.92</b>	<b>1</b>	<b>1.04</b>

## PHOTOMETRIC DATA

Visit [sistemalux.com](http://sistemalux.com) for complete photometric data.


### Pocket Rectangular



CCT (K)	CRI	LOAD (W)	OPTIC	LUMENS (lm)	EFFICACY (lm / W)	MAX CANDELA (cd)	MODEL
3000K	90	27.4W	Accent light	1 886	68	437	S1871W

Use multiplier table for other CCT and CRI output data. Efficacy based on IESNA LM-79 test reports.

#### Accent light (3000K, 90CRI)

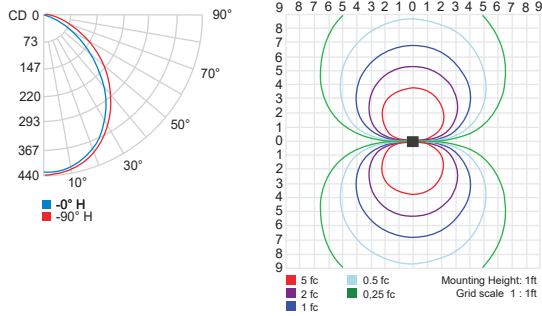

CCT options	2700K	3000K	4000K
CRI options	90CRI	90CRI	90CRI
<b>Multiplier</b>	<b>0.92</b>	<b>1</b>	<b>1.04</b>