
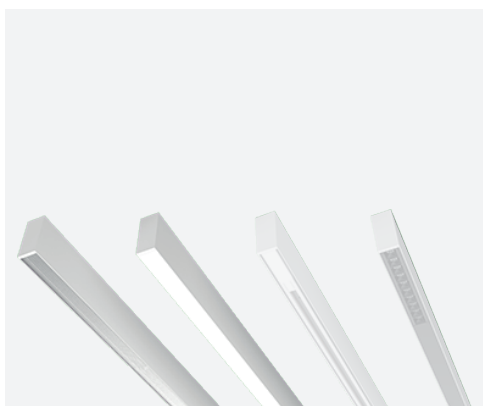


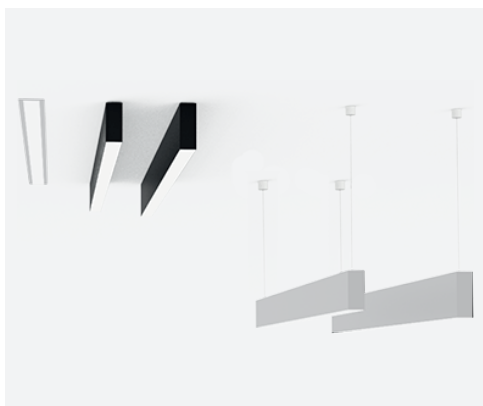

Slim high or compact profile surface luminaire available with direct illuminations. Frosted or microprismatic white PMMA diffuser provides a uniform distribution. Available as single modules or continuous runs with a wide distribution suitable for general lighting.

## Luminaire characteristics:



**Power input:** 5.6W/ft, 8.3W/ft or 11.2W/ft  
**Lumens:** 439lm/ft to 1026lm/ft (3000K, 90CRI)  
**Luminaire efficacy:** Up to 95lm/W

|                           |                                                                                                                                                   |
|---------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>source:</b>            | High efficiency Osram LED (LM-80)<br>3000K: 90CRI,<br>3500K: 90CRI,<br>4000K: 90CRI.                                                              |
| <b>Lumen maintenance:</b> | 90% of initial lumens at 90 000 hours (L90) (LM-79).                                                                                              |
| <b>Optics:</b>            | General light frosted and microprismatic.                                                                                                         |
| <b>Material:</b>          | Body: Extruded aluminum profile with die-cast end caps.<br>Diffuser: PMMA                                                                         |
| <b>Mounting:</b>          | Surface mounted using anchoring screws.<br>Installs onto a standard 4" octagonal junction box.<br>Supplied with square canopy.                    |
| <b>Electrical:</b>        | Integral high efficiency LED driver, rated 50 000 hours, 120-277V.                                                                                |
| <b>Dimming:</b>           | 0-10V (120-277V) down to 1% or leading (TRIAC) and trailing edge (ELV) (120V only) down to 5%.                                                    |
| <b>Finish:</b>            | Available in white RAL9010 or black RAL9004, gray RAL9006 available on request. The canopy is supplied white, other finishes available on demand. |
| <b>Weight:</b>            | 1.39 lbs/ft (0.63 kg/ft)                                                                                                                          |
| <b>Warranty:</b>          | 5 year limited warranty.                                                                                                                          |
| <b>Ratings:</b>           | IP20                                                                                                                                              |
| <b>Certification:</b>     |  cULus listed for damp location. Interior use only.            |

**MADE IN CANADA.**

## FAMILY OVERVIEW


Linear small family offers a wide range of mounting and optic options for multiple applications

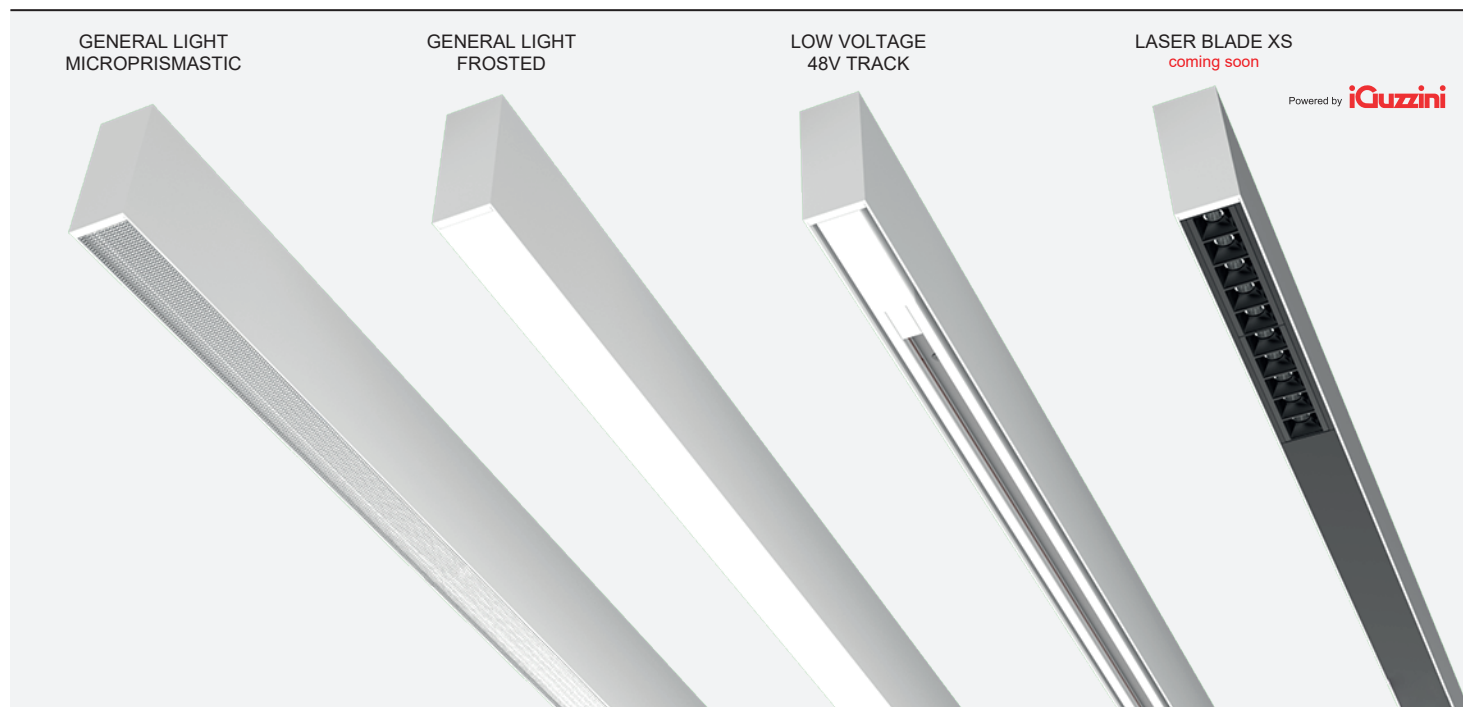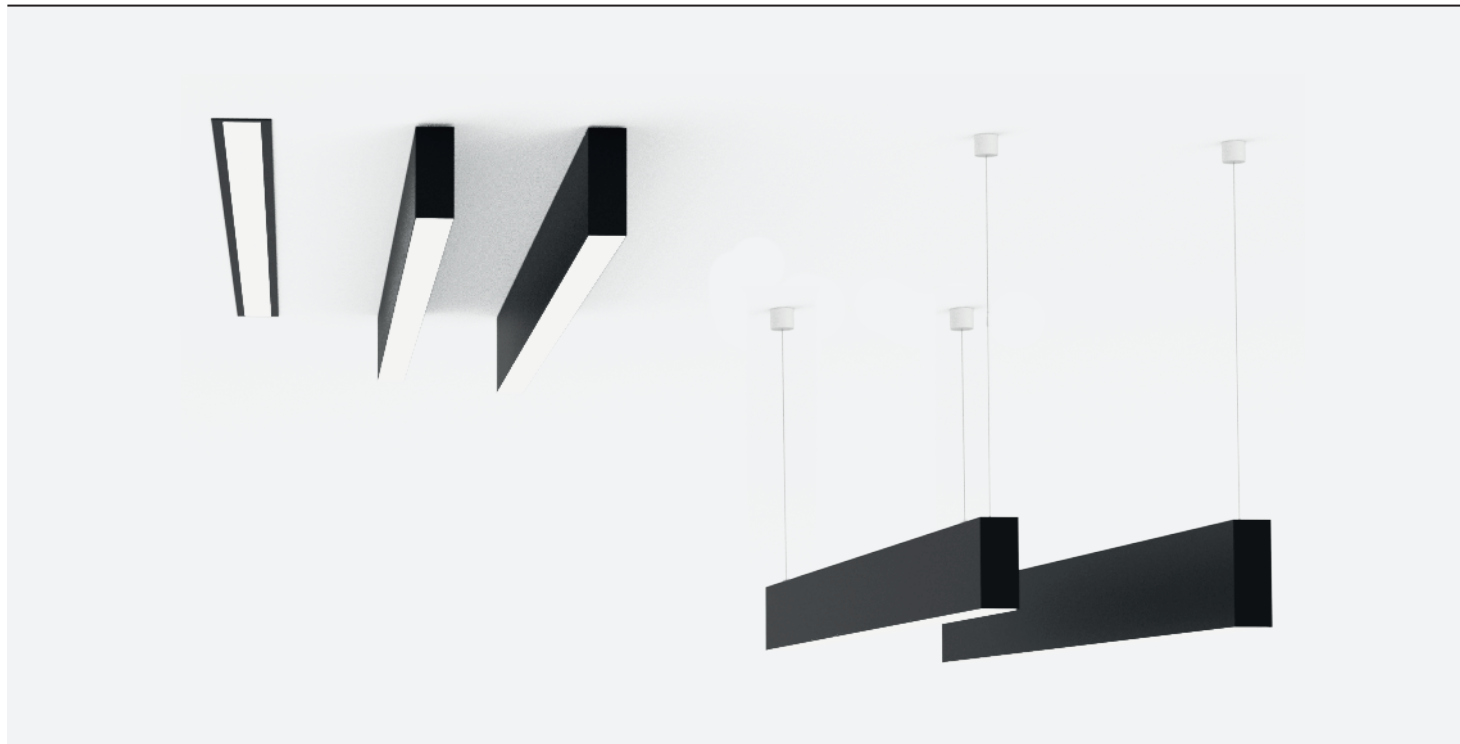

PRODUCT FEATURES

PROPRIETARY LED PLATFORM

Superior thermal management for reliable color consistency and optimized output performance.

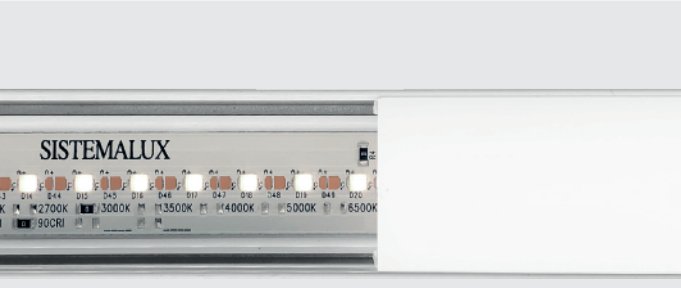


PROFESSIONAL GRADE OPTICS

PMMA premium quality optics designed for visual comfort and performance.




SOPHISTICATED SLIM PROFILE

Minimalist slim shape for subtle integration with architecture.

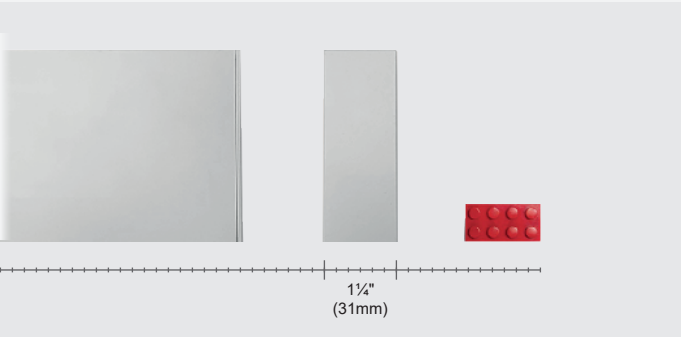


SIZE COMPARISON

Smaller form factor with no compromise on the performance.

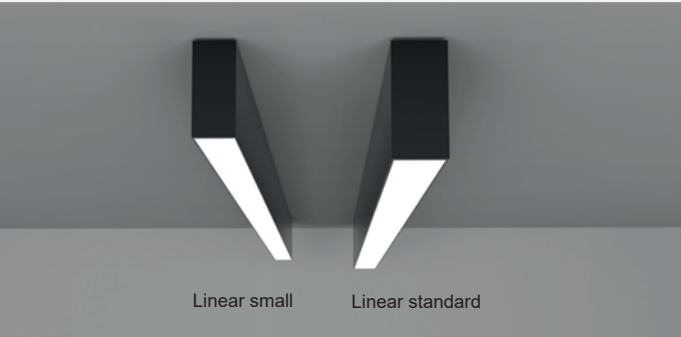


ILLUMINATED MECHANICAL JOINERS

Provides a continuous light without "dead zones" in between units.

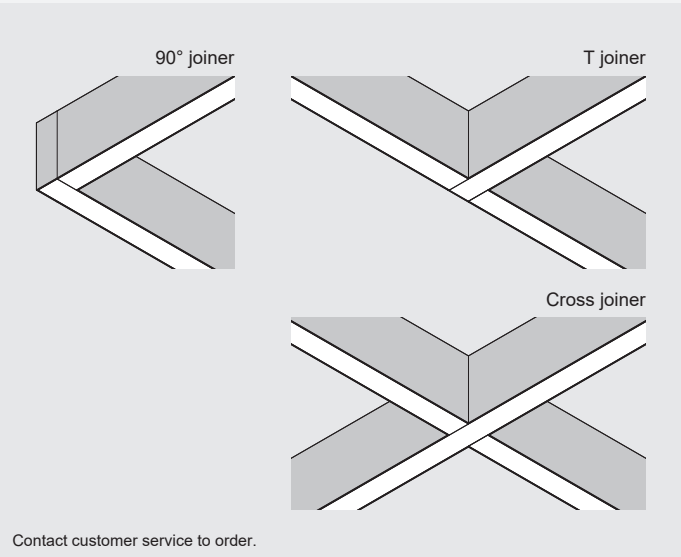


Contact customer service to order.

DIMENSIONS

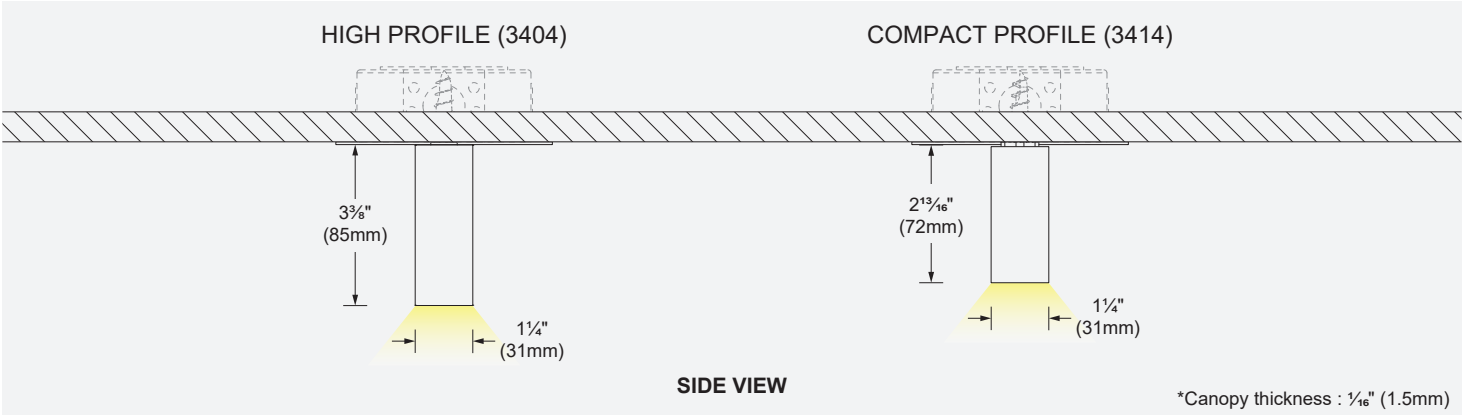

LENGTHS

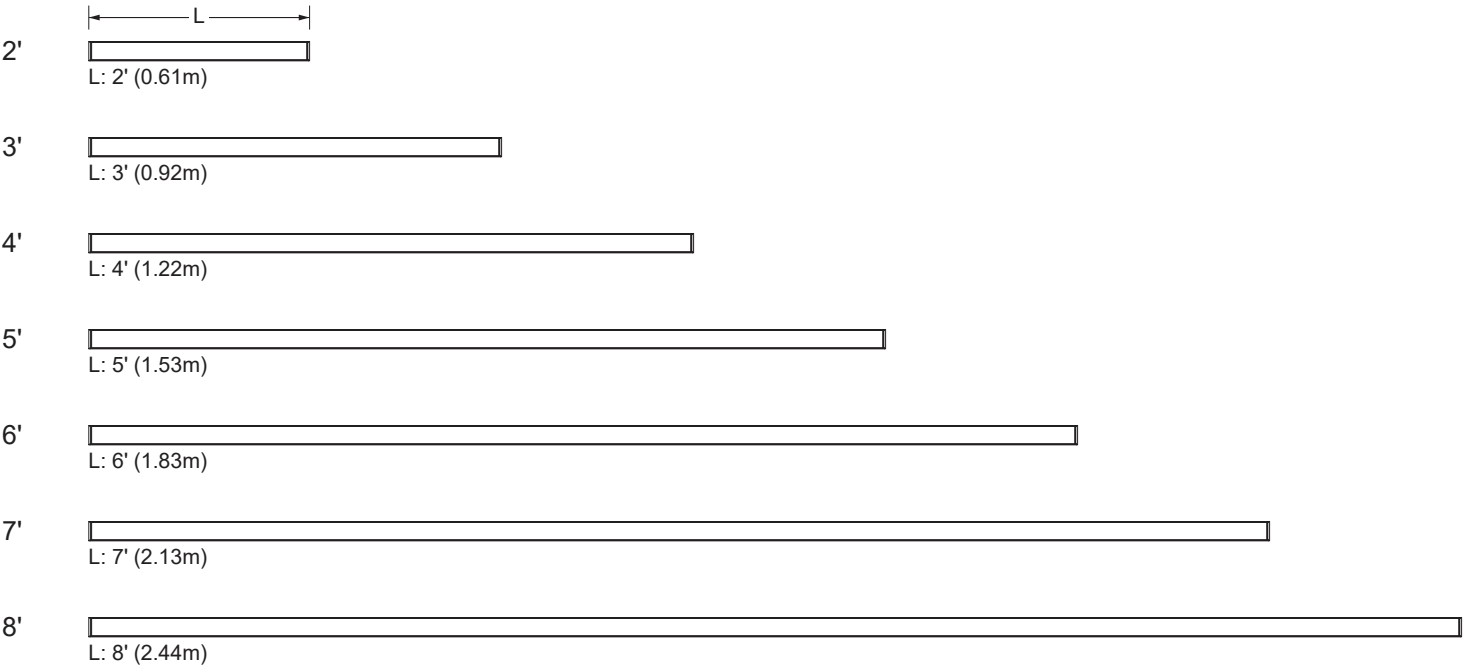

Longer lengths available. See ordering info p.4.

## LED COLOR FIDELITY DATA

| CCT   | R1 | R2  | R3 | R4 | R5 | R6 | R7 | R8 | R9 | R10 | R11 | R12 | R13 | R14 | R15 | Rf | Rg  | Melanopic ratio |
|-------|----|-----|----|----|----|----|----|----|----|-----|-----|-----|-----|-----|-----|----|-----|-----------------|
| 3000K | 91 | 94  | 96 | 91 | 91 | 93 | 92 | 80 | 54 | 86  | 91  | 83  | 92  | 97  | 87  | 91 | 100 | 0.535           |
| 3500K | 95 | 96  | 95 | 94 | 94 | 94 | 94 | 87 | 67 | 88  | 95  | 80  | 95  | 96  | 92  | 92 | 101 | 0.641           |
| 4000K | 92 | 100 | 94 | 94 | 91 | 94 | 93 | 91 | 77 | 84  | 93  | 71  | 94  | 95  | 93  | 92 | 100 | 0.716           |


## PHOTOMETRIC DATA

Visit [sistimalux.com](http://sistimalux.com) for complete photometric data.


| CCT (K) | CRI | OUTPUT | LOAD (W / ft) | OPTIC          | LUMENS (lm / ft) | EFFICACY (lm / W) | MODELS        |
|---------|-----|--------|---------------|----------------|------------------|-------------------|---------------|
| 3000K   | 90  | BO     | 5.6W/ft       | Frosted        | 439              | 78                | 3400-BO-930-F |
|         |     |        |               | Microprismatic | 537              | 95                | 3400-BO-930-M |
|         |     | MO     | 8.3W/ft       | Frosted        | 641              | 77                | 3400-MO-930-F |
|         |     |        |               | Microprismatic | 785              | 94                | 3400-MO-930-M |
|         |     | HO     | 11.2W/ft      | Frosted        | 831              | 74                | 3400-HO-930-F |
|         |     |        |               | Microprismatic | 1 026            | 91                | 3400-HO-930-M |

\*USE MULTIPLIER TABLE FOR OTHER CCT AND CRI OUTPUT DATA


BO Frosted (3000K, 90CRI)




MO Frosted (3000K, 90CRI)




HO Frosted (3000K, 90CRI)




BO Microprismatic (3000K, 90CRI)



MO Microprismatic (3000K, 90CRI)



HO Microprismatic (3000K, 90CRI)



|                   |          |             |             |
|-------------------|----------|-------------|-------------|
| CCT options       | 3000K    | 3500K       | 4000K       |
| CRI options       | 90CRI    | 90CRI       | 90CRI       |
| <b>Multiplier</b> | <b>1</b> | <b>1.03</b> | <b>1.06</b> |

## ORDERING INFO

- -  
FIXTURE

### MODEL

☐ **3404** - High profile ☐ **3414** - Compact profile

### LENGTH

\_\_\_\_\_ 2' to 96'

### OUTPUT

☐ **BO** - Base output ☐ **MO** - Medium output ☐ **HO** - High output

### LED

☐ **930** - 3000K, 90CRI ☐ **935** - 3500K, 90CRI ☐ **940** - 4000K, 90CRI

### OPTIC

☐ **F** - Frosted ☐ **M** - Microprismatic

### VOLTAGE

☐ **120** - 120V ☐ **UNV** - 120-277V

### FINISH<sup>(1)</sup>

☐ **01** - White ☐ **02** - Black

### DIMMING

☐ **D01** - 0-10V (down to 1%) ☐ **LTE** - Leading and trailing edge  
(120V only) (down to 5%)

<sup>(1)</sup> Gray finish available on request, contact customer service for more information.