




Ground mounted bollard suitable for walkways and paths, being a valid alternative to a wall mounted illumination.

Luminaire characteristics:	Power input: 13.5W or 24W Lumens: 485lm to 950lm (for 3000K, 90CRI) Luminaire efficacy: Up to 39lm/W
Source:	LED module (LM-80 tested) 2700K: 90CRI, 3000K: 90CRI, 4000K: 80CRI.
Lumen maintenance:	80% of initial lumens at 70 000 hours (L80)(LM79)
Optics:	Accent light.
Material:	Body: Die-cast aluminum Diffuser: Clear tempered glass. Methacrylate concentrating lens combined with a narrow beam shutter is used to achieve a blade of light effect. Hardware: Stainless steel screws and silicone gaskets
Electrical:	Universal high efficiency electronic LED driver rated at 50 000 hours, 120-277V.
Dimming:	Optional 0-10V (120-277V), down to 10%.
Finish:	White, black, aluminum gray and burnished bronze. White and burnished bronze available with teak wood accent.
Weight	S7236: 2.43lb (1.1kg) S7241: 6.39lb (2.9kg) SL9236: 2.43lb (1.1kg) SL9241: 6.39lb (2.9kg) S7245: 8.16lb (3.7kg) S7246: 13.23lb (6kg)
Warranty:	5 year limited warranty.
Ratings:	IP54, IK06
Certification:	 cULus listed for wet location

ORDERING INFO

- UNV - -

FIXTURE



MODEL

- | | | |
|---|---|--|
| <input type="checkbox"/> S7236 - Mini-cool bollard - 220mm | <input type="checkbox"/> SL9236 - Mini-cool bollard wood - 220mm | <input type="checkbox"/> S7245 - Cool bollard - 290mm |
| <input type="checkbox"/> S7241 - Mini-cool bollard - 580mm | <input type="checkbox"/> SL9241 - Mini-cool bollard wood - 580mm | <input type="checkbox"/> S7246 - Cool bollard - 580mm |

LED

- | | | |
|--|--|--|
| <input type="checkbox"/> H - 2700K, 90CRI | <input type="checkbox"/> W - 3000K, 90CRI | <input type="checkbox"/> N - 4000K, 80CRI |
|--|--|--|

VOLTAGE

- UNV** - 120-277V

FINISH

- | | | | |
|--|--|--|--|
| <input type="checkbox"/> 01 - White | <input type="checkbox"/> 09 - Black | <input type="checkbox"/> 14 - Aluminum gray | <input type="checkbox"/> 20 - Burnish brown |
|--|--|--|--|

DIMMING

- | | |
|---|---|
| <input type="checkbox"/> ND - No dimming | <input type="checkbox"/> D10 - 0-10V |
|---|---|


ACCESSORIES

(TO BE ORDERED SEPARATELY)

- S7249** - Flange for Mini-cool bollard with stainless steel screws
8½" x 9¼" (217mm x 235mm)







- S7269** - Flange for Cool bollard with stainless steel screws
11⅜" x 9⅝" (290mm x 231mm)



DIMENSIONS

MINI COOL BOLLARD / WOOD
S7236 / S7241 / SL9236 / SL9241

COOL BOLLARD
S7245 / S7246

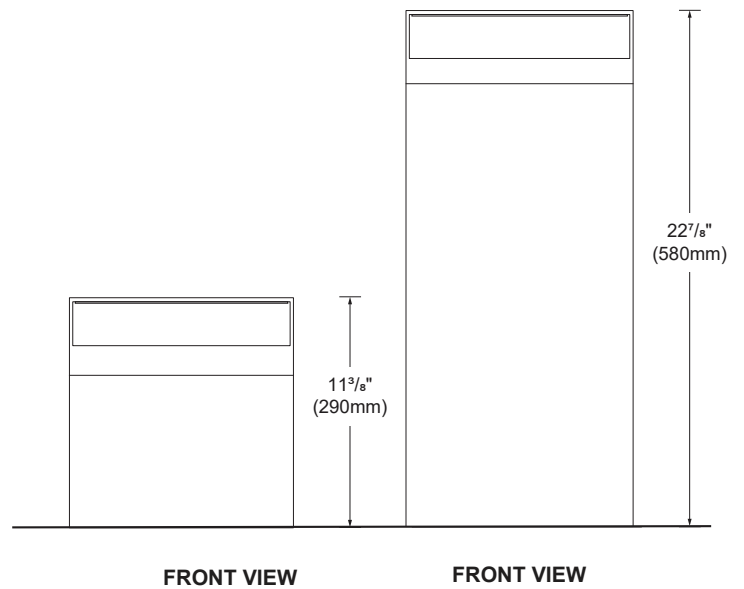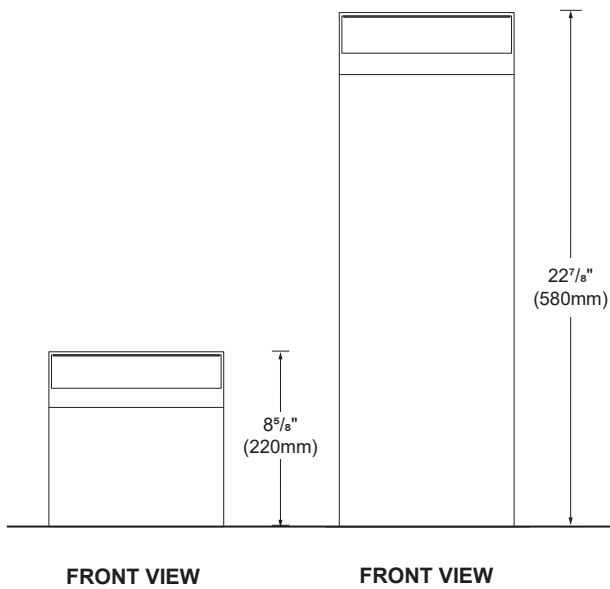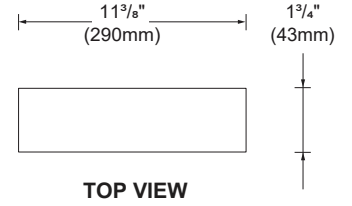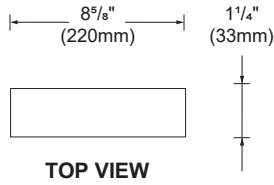


PHOTOMETRIC DATA


Visit sistimalux.com for complete photometric data.

CCT (K)	CRI	LOAD (W)	OPTIC	LUMENS (lm)	EFFICACY (lm / w)	MAX CANDELA (cd)	MODELS
3000K	90	13.5W	Accent light	485	36	225	S7236W-220mm
							S7241W-580mm
							SL9236W-220mm
							SL9241W-580mm

Accent light 220mm (3000K, 90CRI)

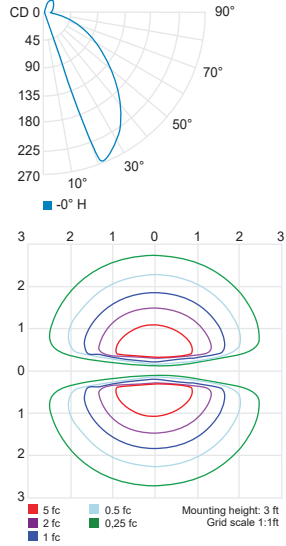

Accent light 580mm (3000K, 90CRI)

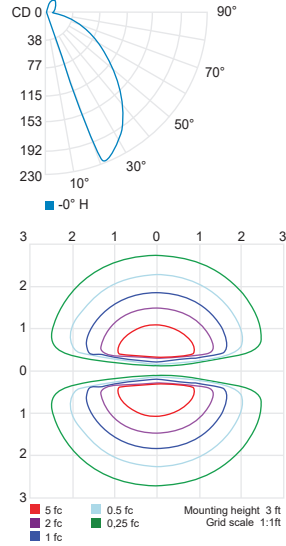


CCT options	2700K	3000K	4000K
CRI options	90CRI	90CRI	80CRI
Multiplier	0.94	1	1.03

PHOTOMETRIC DATA


Visit sistemalux.com for complete photometric data.

CCT (K)	CRI	LOAD (W)	OPTIC	LUMENS (lm)	EFFICACY (lm / w)	MAX CANDELA (cd)	MODELS
3000K	90	24W	Accent light	950	39	465	S7245W-290mm
							S7246W-580mm

Accent light 290mm (3000K, 90CRI)

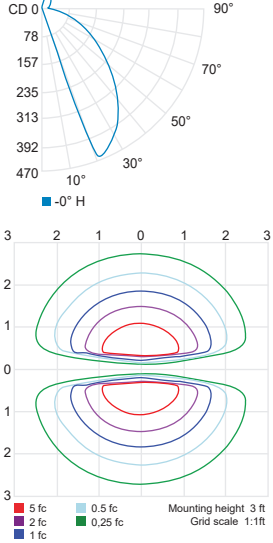

Accent light 580mm (3000K, 90CRI)

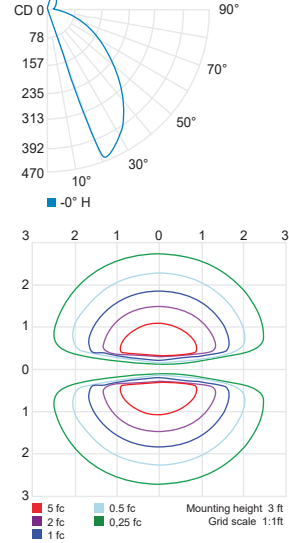

CCT options	2700K	3000K	4000K
CRI options	90CRI	90CRI	80CRI
Multiplier	0.94	1	1.03