




Collection of wall mounted luminaires for exterior applications. Exceptional European build quality with high corrosion resistant finish. Robust marine grade die-cast aluminum construction with stainless steel fasteners and factory and glass diffuser.





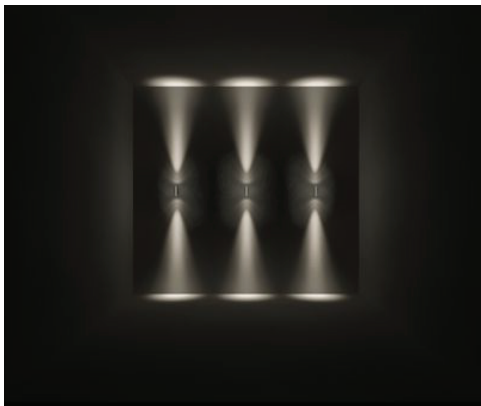

Luminaire characteristics:	Power input: 8.8W to 15.3W (system wattage) Lumens: 904lm (for 3000K, 90CRI) Luminaire efficacy: Up to 59lm/W
Source:	White COB LED module 2700K : 90CRI 3000K : 90CRI 4000K : 80CRI.
Lumen maintenance:	80% of initial lumens at 70 000 hours (L80 B10) Ta 77°F (25°C) 80% of initial lumens at 50 000 hours (L80 B10) Ta 104°F (40°C) (LM-80)
Optics:	Flood, adjustable ±15°, up and/or down. Down optic has a ULR of 0% Up and down optic has a ULR of 50%
Material:	Body: Die-cast aluminum Reflector: 99.98% pure anodized aluminum Diffuser: Clear tempered glass Mounting plate: Machined aluminum Hardware: Stainless steel screws
Mounting:	Installs on a standard 4" octagonal junction box.
Electrical:	Integral high efficiency LED driver, rated at 50 000 hours, 120-277V.
Dimming:	Down to 15%, 0-10V (120-277V).
Finish:	Anthracite gray or aluminum gray painted finish. Double powder paint coat in 3 steps process: surface treatment containing ceramic nano particles (Bonderite). Epoxy primer paint. Polyester powder paint with high resistance against UV rays and harsh weather conditions. See page 2 for other premium finishes available (white, green, black & burnished bronze)
Standard finish	
Premium finishes	
Weight:	3.3 / 3.9lb (1.5 / 1.8kg)
Warranty:	5 year limited warranty.
Ratings:	IP65, IK08
Certification:	cULus listed for wet location.



ORDERING INFO





PRODUCT CODE

MODEL	LED	VOLTAGE	FINISH	DIMMING
S3814 Down	H 2700K, 90CRI	UNV 120-277V	14 Aluminum Gray 	D10 0-10V (down to 15%)
S3815 Up/Down	W 3000K, 90CRI		24 Anthracite gray 	
	N 4000K, 80CRI		<i>PREMIUM</i>	
			01 White 	
			07 Green 	
			09 Black 	
			20 Burnished bronze 	



DIMENSIONS

S3814

S3815

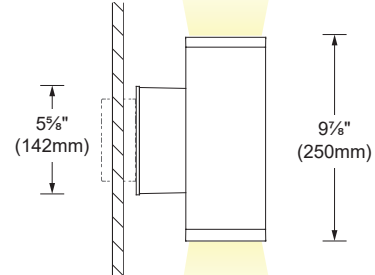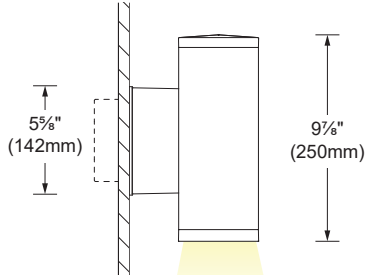

SIDE VIEW

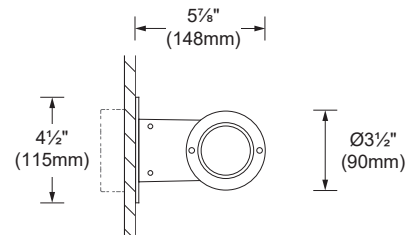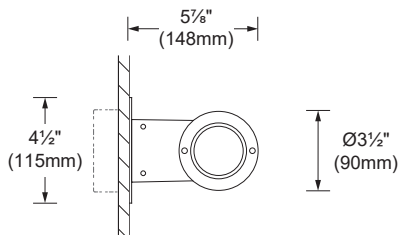


BOTTOM VIEW

PHOTOMETRIC DATA

Visit sistimalux.com for complete photometric data.

CCT (K)	CRI	LOAD (W)	OPTIC	LUMENS (lm)	EFFICACY (lm/w)	MAX CANDELA (cd)	B.U.G	MODELS
3000K	90	8.8W	Flood 31°	452	51	1 360	B1-U0-G0	S3814W


Flood 31° (3000K, 90CRI)



CCT (K)	CRI	LOAD (W)	OPTIC	LUMENS (lm)	EFFICACY (lm/w)	MAX CANDELA (cd)	B.U.G	MODELS
3000K	90	15.3W	Flood 31°	904*	59	2 720*	-	S3815W

* Total value for both directions. Divide by 2 for value on each direction.

Flood 31° (3000K, 90CRI)

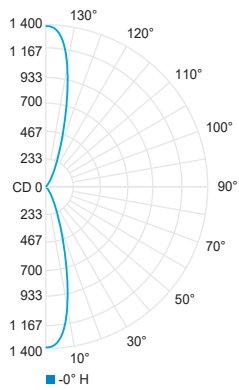

CCT options	2700K	3000K	4000K
CRI options	90CRI	90CRI	80CRI
Multiplier	0.94	1	1.06