

# PALCO 51 WALL WASHER


TRACK PROJECTOR FOR FILORAIL - DALI MULTI ADDRESS / 0-10V SINGLE ADDRESS

Type:

SPECIFICATION SHEET

Project:

Page: 1 of 3

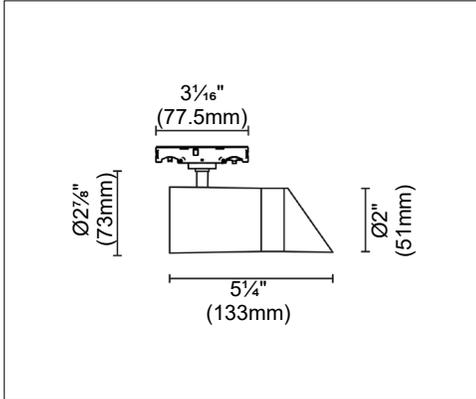

## Luminaire characteristic:

CCT	MODELS	POWER (W)	OPTIC	LUMENS (lm)	EFFICACY (lm / W)	MAX CANDELA (cd)
3000	Palco	25.5	Wall Washer	289	18	616

**Source:** White LED  
2700K : 90CRI,  
3000K : 90CRI,  
3500K : 90CRI,  
4000K : 90CRI,  
**Lumen maintenance:** 80% of initial lumens at 50 000 hours (L90 B10) (LM-80).

**Optics:** Wall washer.  
High level of visual comfort.

**Material:** Body: Die-cast aluminium.  
Adapter: Thermoplastic.  
Reflector: Aluminium.  
De-glaring prism lens: Acrylic.  
Asymmetric screen: Aluminium

**Mounting:** Adjustable head with track adapter for 48V low voltage iGuzzini Filorail track (360° vertical (pan), and 90° horizontal (tilt) pivoting axes to be ordered separately).  
**The track heads can be mounted also on curved tracks.**

**Electrical:** iGuzzini Filorail 48V DC track system.

**Control:** 0-10V: All track heads will be controlled together.  
DALI: Track heads are individually addressable.

**Finish:** White (RAL9010) painted finish.  
Black (RAL9005) painted finish.

**Weight:** 0.63lbs (0.29kg).

**Warranty:** 5 year limited warranty.

**Ratings:** IP20

**Certification:** cULus listed for dry location.



# PALCO 51 WALL WASHER

TRACK PROJECTOR FOR FILORAIL - DALI MULTI ADDRESS / 0-10V SINGLE ADDRESS

Type:

SPECIFICATION SHEET

Project:

Page: 2 of 3

## ORDERING INFO

[CLICK HERE](#)



CONFIGURE



PRODUCT CODE

--	--	--	--	--	--	--


MODEL	SIZE	LED	OPTIC	FINISH (BODY)	DIMMING	CIRCUIT CLASS
IPLC-FR Palco Filorail	Ø51 Ø2" (51mm)	<b>927</b> 2700K, 90CRI	<b>WW</b> Wall Washer	<b>01</b> <input type="checkbox"/> White  <b>02</b> <input checked="" type="checkbox"/> Black	<b>TDA</b> <sup>1</sup> DALI  <b>TD10</b> <sup>2</sup> 0-10V	<b>CL2</b> Class 2
		<b>930</b> 3000K, 90CRI				
		<b>935</b> 3500K, 90CRI				
		<b>940</b> 4000K, 90CRI				

<sup>1</sup> Track heads are individually addressable

<sup>2</sup> All track heads will be controlled together

## DIMENSIONS

Palco Ø51  
Ø2" (51mm)

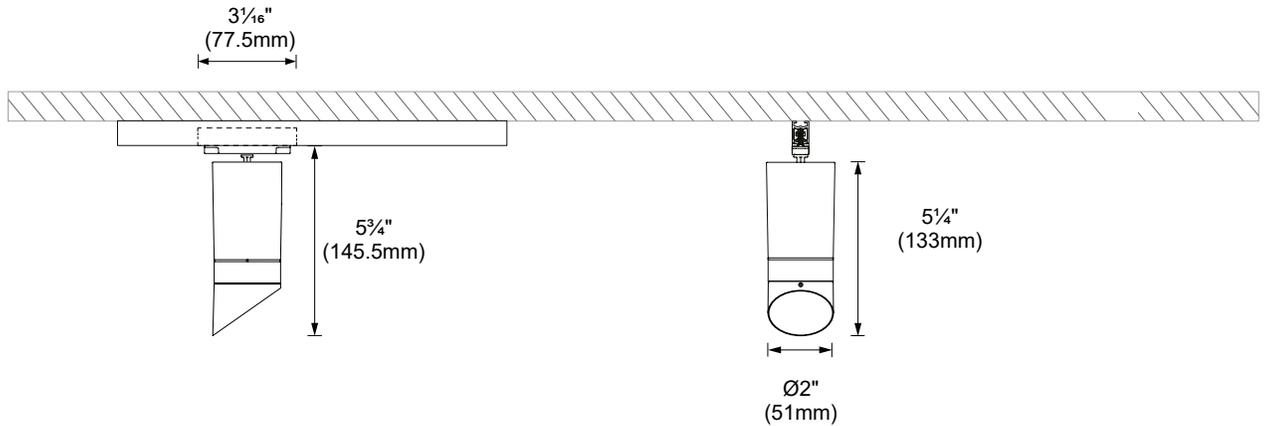

# PALCO 51 WALL WASHER

TRACK PROJECTOR FOR FILORAIL - DALI MULTI ADDRESS / 0-10V SINGLE ADDRESS

Type:

SPECIFICATION SHEET


Project:

Page: 3 of 3

## PHOTOMETRIC DATA


Visit [iguzzini.com/us](http://iguzzini.com/us) for complete photometric data.

Palco Ø51  
Ø2" (51mm)



CCT (K)	CRI	POWER (W)	OPTIC	LUMENS (lm)	EFFICACY (lm / W)	MAX CANDELA (cd)	MODELS
3000	90	25.5	Wall Washer	289	18	616	IPLC-FR-86-930-WW

Wall Washer, (3000K, 90CRI)



	Center beam fc	Beam width ft	
17ft	1.97	10.7	10.4
34ft	0.49	21.4	20.7
51ft	0.22	32.0	31.1
68ft	0.12	42.7	41.4
85ft	0.08	53.4	51.8
102ft	0.05	64.1	62.1

CCT options	2400K	2700K	3000K	3500K	4000K
CRI options	90CRI	90CRI	90CRI	90CRI	90CRI
<b>Multiplier</b>	<b>0.92</b>	<b>1.00</b>	<b>1.00</b>	<b>1.00</b>	<b>1.03</b>