


# MOVIT ARM SQUARE

Project name: \_\_\_\_\_

Type: \_\_\_\_\_

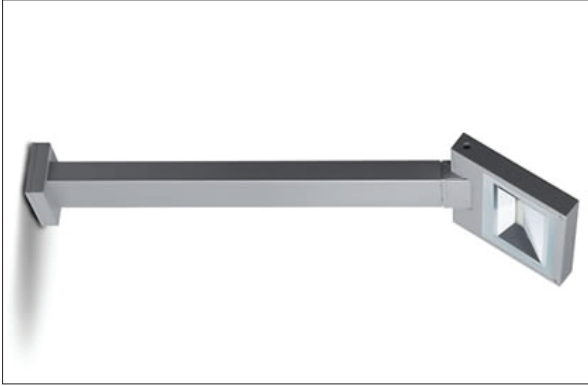

Surface slim floodlight projector, can be used as direct or indirect light.

**Luminaire characteristics:**

**Power input:** 26.5W

**Lumens:** 1411 to 1424lm (delivered)

**Luminaire efficacy:** 53lm/W

**Source:** White LED, (LM-80 tested).

3000K: 90CRI.

4000K: 90CRI.

**Lumen maintenance:** >70% of initial lumens at 50 000 hours (L70) (LED) / LM-79 tested.

**Optics:** Flood.

**Material:**

Body: Die-cast aluminum.

Reflector: 99.98% pure anodized aluminum.

Diffuser: toughened glass.

Hardware: Stainless steel screws and silicone gaskets.

**Electrical:** See remote LED driver options on page 2.

**Mounting:** Install on a standard 4" junction box.


**Finish:** White or Aluminum gray.

**Weight:** 10.36lbs (4.7kg).


**Warranty:** 5 year limited warranty.

**Certification:** cULus listed for wet location.

**Ratings:** IP 65, IK 09

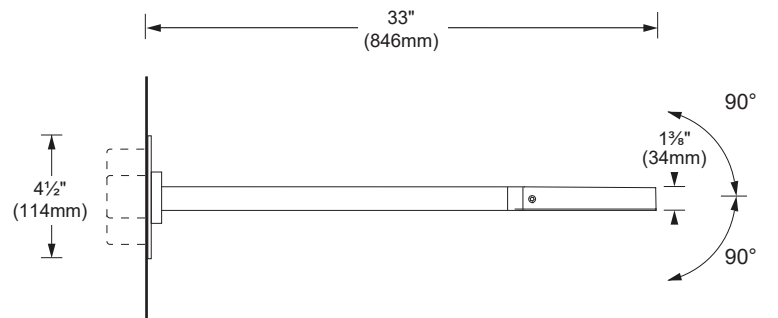

**SIDE VIEW**

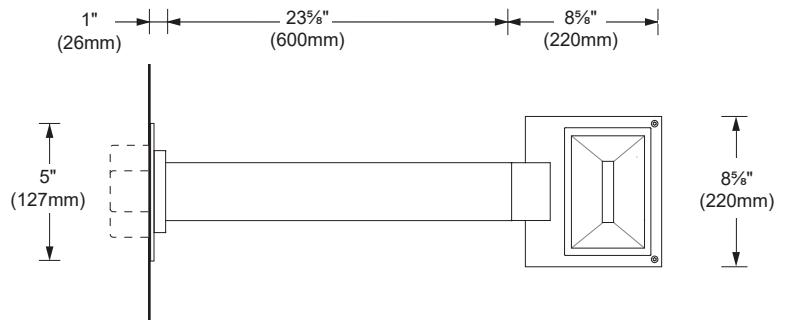

**BOTTOM VIEW**

Project name: \_\_\_\_\_

Type: \_\_\_\_\_

**ORDERING INFO**

MODEL	MOUNTING	ELECTRICAL	FINISH
<input type="radio"/> <b>S3060N</b> - 4000K, Symmetrical <input type="radio"/> <b>S3060W</b> - 3000K, Symmetrical	<input type="radio"/> <b>JB</b> - Surface mounted with Jbox	<input type="radio"/> <b>REM</b> - 24V remote power supply	<input type="radio"/> <b>01</b> - White <input type="radio"/> <b>14</b> - Aluminum gray

**REMOTE LED DRIVER OPTION (TO BE ORDERED SEPARATELY)**  
 Requirement for one (1) fixture: 22 W, 24VDC

<input type="radio"/> <b>4548-0024-025-UNV-ND</b>	<input type="radio"/> <b>4551-0024-080-120-LTE</b>
<input type="radio"/> <b>4448-0024-060-UNV-ND</b>	<input type="radio"/> <b>4448-0024-150-UNV-D10</b>
<input type="radio"/> <b>4545-0024-075-UNV-ND</b>	<input type="radio"/> <b>4546-0024-200-2C-UNV-ND</b>

**REMOTE LED DRIVER OPTIONS (TO BE ORDERED SEPARATELY)**

Watts	Min-Max	Voltage	Rated	Dimming protocol	Box dimensions	Max distance 18AWG	Code
25	1	120-277V	Outdoor	None	7" X 5" X 3" (178 X 127 X 76mm)	30ft (9m)	4548-0024-025-UNV-ND
60	1-2	120-277V	Indoor	None	10" X 8" X 4" (254 X 203 X 102mm)	30ft (9m)	4448-0024-060-UNV-ND
75	1-3	120-277V	Outdoor	None	11" X 3" X 2" (279 X 75 X 51mm)	30ft (9m)	4545-0024-075-UNV-ND
80	1-3	120V	Outdoor	Leading and trailing edge (ELV and TRIAC)	14" X 5" X 2" (356 X 127 X 51mm)	30ft (9m)	4551-0024-080-120-LTE
150	1-6	120-277V	Indoor	0-10V	10" X 8" X 4" (254 X 203 X 102mm)	27ft (8.2m)	4448-0024-150-UNV-D10
200	1-4 Per channel (Max 8)	120-277V	Outdoor	None	12" X 5" X 2" (305 X 127 X 51mm)	30ft (9m) Per channel	4546-0024-200-2C-UNV-ND

\*The total power of all connected luminaires may not be higher than the power of the driver.


Project name: \_\_\_\_\_

Type: \_\_\_\_\_

**TECHNICAL DATA**

(Approximate wattage values depending on power supply used)

LOAD (W)	CCT (K)	CRI	OPTIC	DELIVERED LUMENS (lm)	LUMINAIRE EFFICACY (lm / w)	CENTER BEAM CANDLE POWER (cd)	MODEL
26.5W	4000K	90	Flood	1424	53	641	S3060N
	3000K			1411	53	635	S3060W

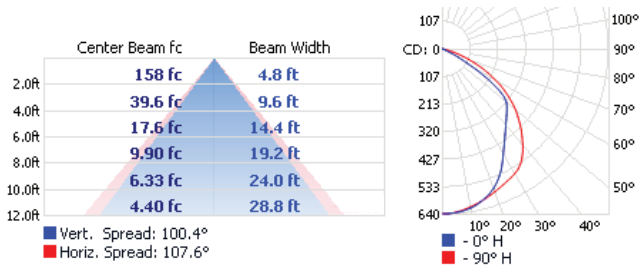

3000K - 90 CRI - Flood