

MULTIPLE LARGE

MODELS: 8218, 8228, 8238, 8248, 8248L, 8268

INSTALLATION SHEET

PAGE: 1 OF 2

IMPORTANT SAFETY INSTRUCTIONS:

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. DO NOT INSTALL THE FIXTURE ASSEMBLY CLOSER THAN 6 in FROM ANY CURTAIN OR SIMILAR COMBUSTIBLE MATERIAL. SAFE THESE INSTRUCTIONS.


FIXTURE INSTALLATION

- A - REMOVE THE SCREW OF THE JUNCTION BOX. INSTALL BX (BY OTHERS) IN THE JUNCTION BOX. MAKE ALL NECESSARY WIRE CONNECTIONS BETWEEN THE BRANCH CIRCUIT AND THE LUMINAIRE. CLOSE JUNCTION BOX AND SECURE WITH REMOVABLE SCREW.
OPTIONAL DIMMING CIRCUIT, INCLUDED. REMOVE JUNCTION BOX CAP. DIMMING WIRES PURPLE (+) AND GRAY OR PINK (-) FOR 0-10V DIMMING. PURPLE AND PURPLE FOR LUTRON HI-LUME BUS SUPPLY.
- B - INSERT FIXTURE IN THE CUT-OUT (SEE TABLE PAGE 2).
- C - FASTEN WASHER & SCREW PARTIALLY TO ANCHOR KEY, LEAVING A SMALL GAP. INSERT ANCHOR KEYS IN CROSS-SHAPED CUT-OUT AT THE BOTH ENDS OF MULTIPLE LARGE ASSEMBLY. SLIDE ALLEN HEAD SCREW ALONG SLOT. WHEN ANCHOR RESTS ON CEILING SURFACE, TIGHTEN WITH PROVIDED ALLEN KEY.

LAMPING INSTALLATION

- D - CLIP-IN THE TWO CONNECTOR ASSEMBLIES TOGETHER. SNAP INNER RING IN OUTER RING BY ALIGNING THE TWO RETAINING CLIPS WITH THE HOLDER.

TO ENSURE THE FIXTURE IS TIGHTLY SECURED, PUSH FRAME UPWARDS AGAINST CEILING DURING INSTALLATION.
ONE HEAD USE SIDE OF WIRING BOX. ALL OTHER VERSIONS TO USE JUNCTION BOX.

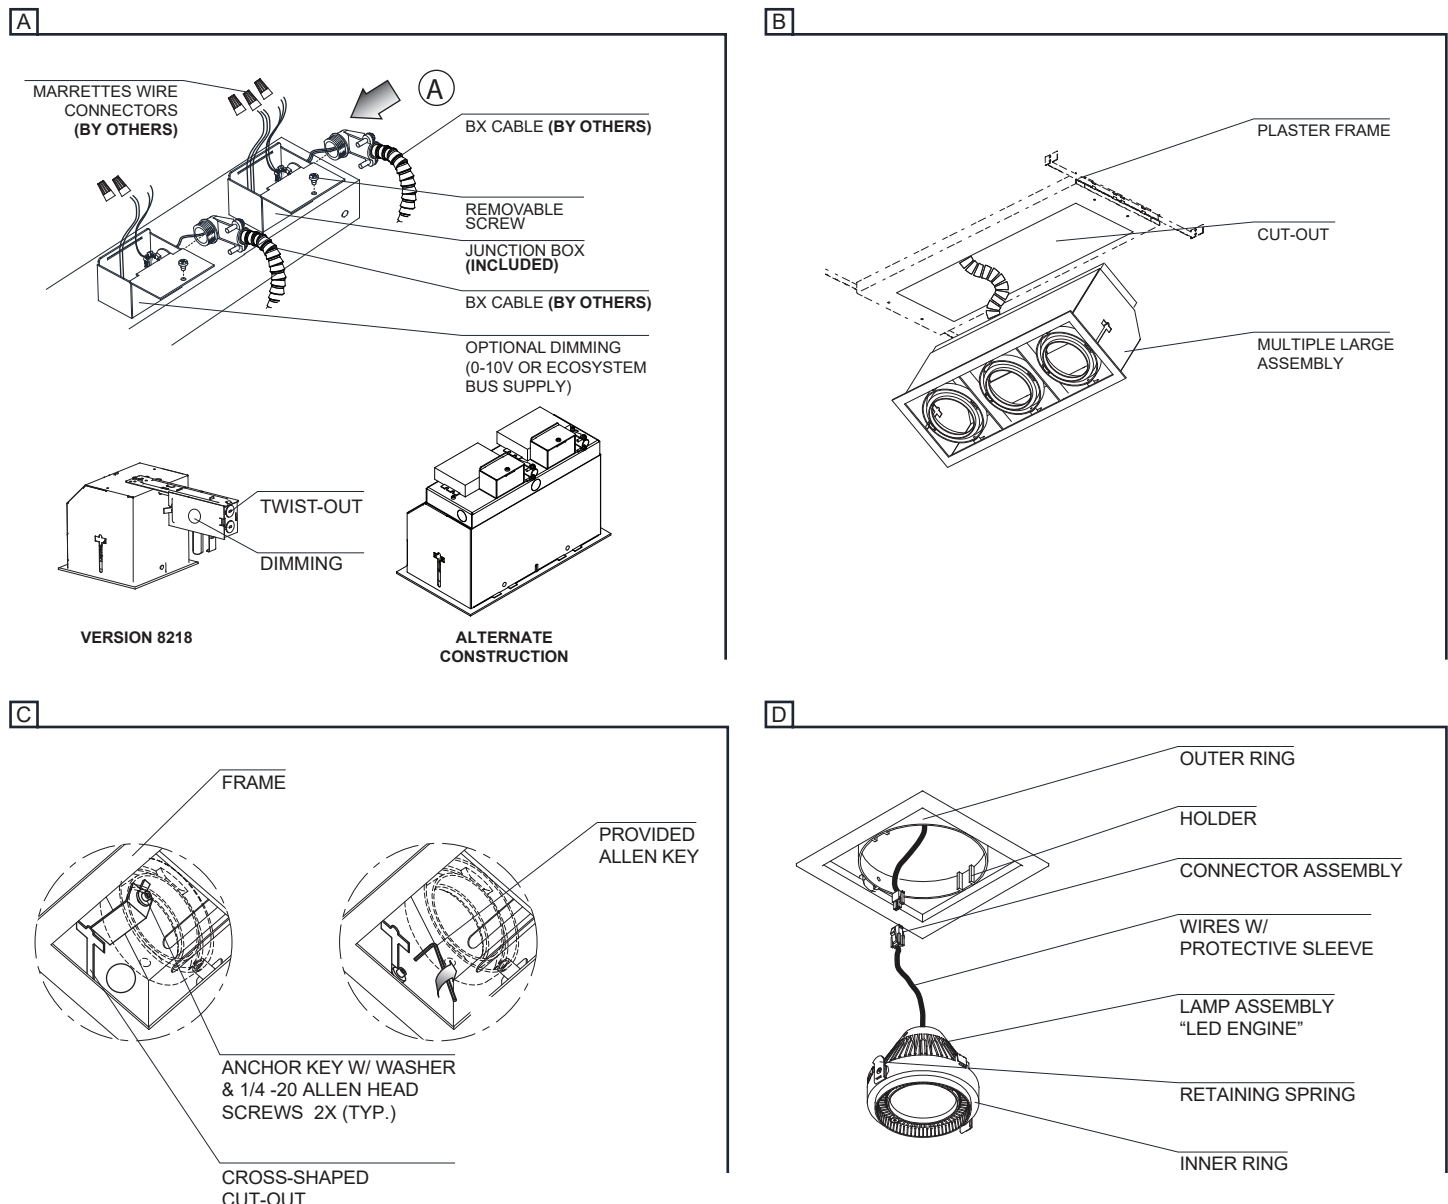

INS-227

LAST UPDATE: August 03, 2021

CG - R5

SISTEMALUX



9320 Boul. St-Laurent,
suite 100, Montréal (Québec)
Canada H2N 1N7
P.: 514.523.1339 F.: 514.525.6107

MULTIPLE LARGE


MODELS: 8218, 8228, 8238, 8248, 8248L, 8268

INSTALLATION SHEET

PAGE: 2 OF 2

ITEM	CUT-OUT DIMENSIONS (A X B)	OVER-ALL DIMENSIONS (C X D)
MUL-210C-KIT W/ 8218	6-1/2"(165mm) X 6-1/2"(165mm)	9-1/2"(241mm) X 14-1/8"(359mm)
MUL-220C-KIT W/8228	6-1/2"(165mm) X 13"(330mm)	9-1/2"(241mm) X 20-5/8"(524mm)
MUL-230C-KIT W/8238	6-1/2"(165mm) X 19-1/2"(495mm)	9-1/2"(241mm) X 27-1/8"(689mm)
MUL-240C-KIT W/8248	13-1/8"(333mm) X 13-1/8"(333mm)	15-3/8"(391mm) X 20-1/4"(514mm)
MUL-240L-C-KIT W/8248L	6-1/2"(165mm) X 25-3/4"(654mm)	9-1/2"(241mm) X 33-3/8"(848mm)
MUL-260C-KIT W/8268	6-1/2"(165mm) X 38-1/4"(971mm)	9-1/2"(241mm) X 45-7/8"(1165mm)

Ceiling thickness: Min: 1/8" (3mm), Max 1-3/8" (35mm)

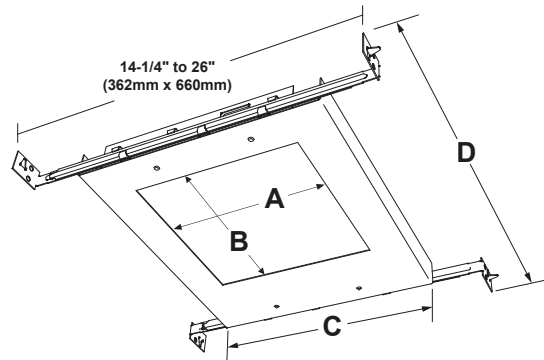

ORDERING INFO

MODEL	LED	OPTIC	VOLTAGE	FINISH	OPTIONAL DIMMING
MODEL <input type="radio"/> 8218 - ONE HEAD <input type="radio"/> 8228 - TWO HEADS <input type="radio"/> 8238 - THREE HEADS <input type="radio"/> 8248 - FOUR HEADS <input type="radio"/> 8248L - FOUR HEADS <input type="radio"/> 8268 - SIX HEADS	LED <input type="radio"/> 830 - 3000K <input type="radio"/> 930 - 3000K <input type="radio"/> 835 - 3500K <input type="radio"/> 840 - 4000K	OPTIC <input type="radio"/> 20 - 22° <input type="radio"/> 30 - 26° <input type="radio"/> 40 - 42°	VOLTAGE <input type="radio"/> 120V (1 HEAD) <input type="radio"/> 277V (1 HEAD) <input type="radio"/> UNV - 120-277V	FINISH <input type="radio"/> 01 - White <input type="radio"/> 10 - Gray	OPTIONAL DIMMING <input type="radio"/> D2B - Lutron Hi-lume® BUS supply, wired in factory (FOR 8218 ONLY)

INS-227

LAST UPDATE: August 03, 2021

CG - R5

SISTEMALUX



9320 Boul. St-Laurent,
suite 100, Montréal (Québec)

Canada H2N 1N7

P.: 514.523.1339 F.: 514.525.6107