





Recessed wall luminaire, creates a well defined blade of light on walls.

**Luminaire characteristics:**

**Power input:** 3W  
**Lumens:** 16lm (for 3000K, 90CRI)  
**Luminaire efficacy:** Up to 5lm/W

<b>Source:</b>	LED module, (LM-80 tested). 2700K: 90CRI, 3000K: 90CRI, 4000K: 80CRI.
<b>Lumen maintenance:</b>	80% of initial lumens at 70 000 hours (L80)(LM-79)
<b>Optics:</b>	Accent light.
<b>Material:</b>	Body: Die-cast aluminum and extruded aluminum structure Diffuser: Tempered glass Reflector: 99.98% pure anodized aluminum Hardware: Stainless steel screws and silicone gaskets
<b>Mounting:</b>	Recessed wall installation using recessed box accessory.
<b>Electrical:</b>	High efficiency electronic LED driver, rated at 50 000 hours, 120V or 120-277V
<b>Dimming:</b>	No dimming 120-277V or 0-10V (120V), down to 15%.
<b>Finish:</b>	White or aluminum gray
<b>Weight:</b>	1.1lb (0.5kg)
<b>Warranty:</b>	5 year limited warranty.
<b>Ratings:</b>	IP65, IK06
<b>Certification:</b>	cULus listed for wet location

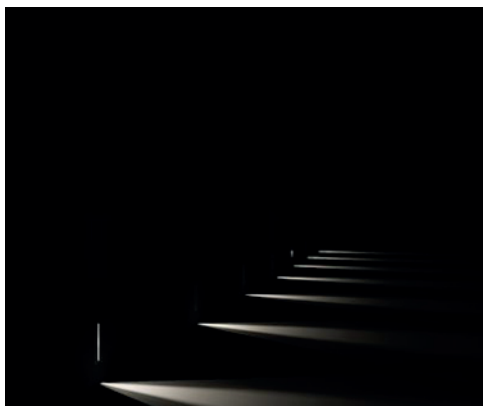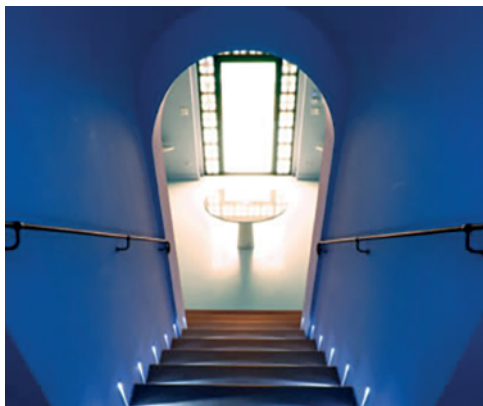

**ORDERING INFO**

**S4655** - - -  
FIXTURE

**S4653**  
RECESSED BOX



**MODEL**

**S4655**

**LED**

**H** - 2700K, 90CRI

**W** - 3000K, 90CRI

**N** - 4000K, 80CRI

**VOLTAGE**

**120** - 120V

**UNV** - 120-277V

**FINISH**

**01** - White

**14** - Aluminum gray


**DIMMING**

**ND** - No dimming


**D10** - 0-10V (Down to 15%)

**MOUNTING ACCESSORIES**  
(TO BE ORDERED SEPARATELY)


**S4653** - Polypropylene recessed box  
3<sup>3</sup>/<sub>16</sub>" X 8<sup>1</sup>/<sub>4</sub>" X 3<sup>3</sup>/<sub>8</sub>"  
(80 x 210 x 85 mm)



**DIMENSIONS**

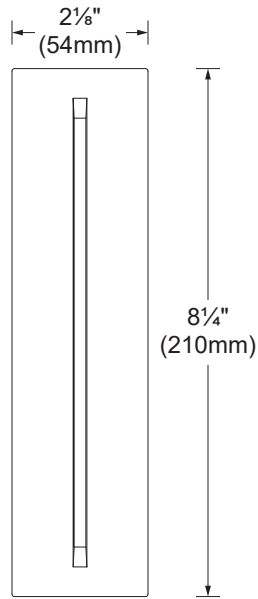

**FRONT VIEW**

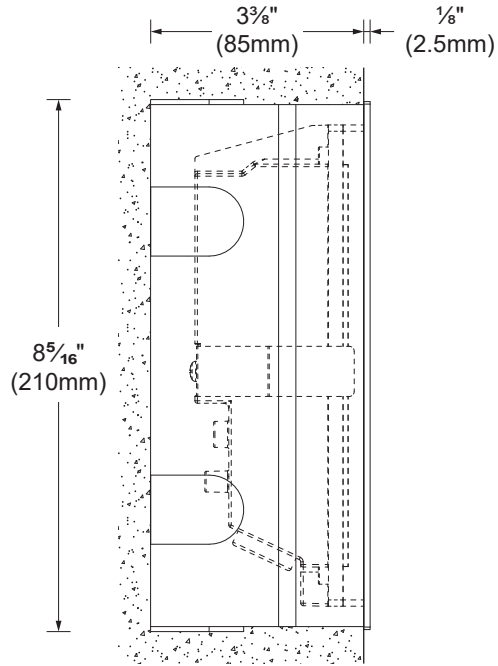


**SECTION VIEW**

**PHOTOMETRIC DATA**

Visit [sistemalux.com](http://sistemalux.com) for complete photometric data.

CCT (K)	CRI	LOAD (W)	OPTIC	LUMENS (lm)	EFFICACY (lm/w)	MAX CANDELA (cd)	MODELS
3000K	90	3W	Accent light	15	5	45	S4655W

Accent light (3000K, 90CRI)

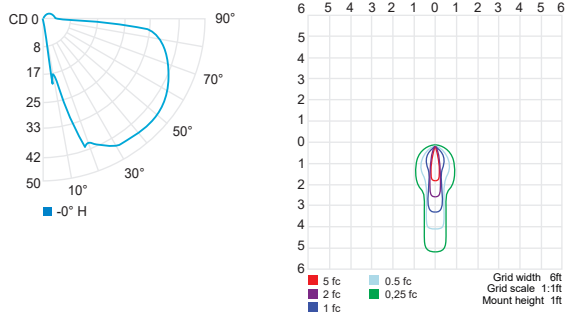

CCT options	2700K	3000K	4000K
CRI options	90CRI	90CRI	80CRI
<b>Multiplier</b>	<b>0.93</b>	<b>1</b>	<b>1.06</b>