
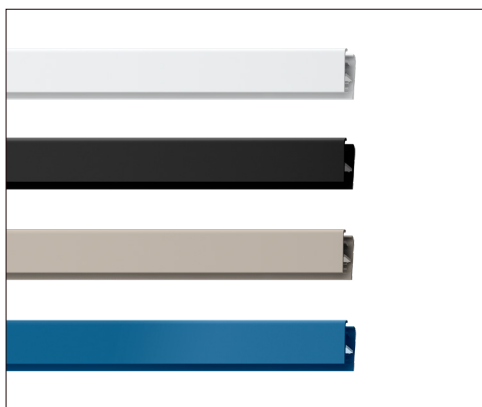


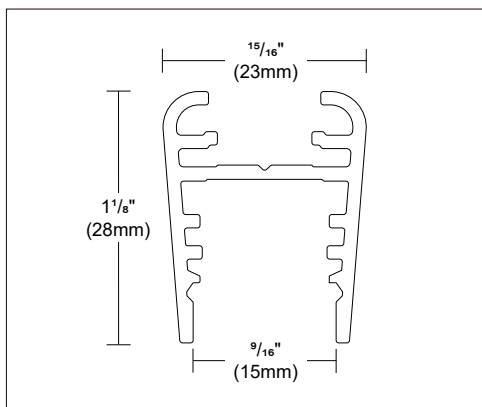

Luminaire characteristic ¹:

UNIT LOAD (W/ft)	DIRECT OPTIC	UNIT LUMEN (lm/ft)	EFFICACY (lm/W)	UNIT MAX CANDELA (cd)
5.0	Space optics luminous edge	589	118	557
5.0	Space optics hidden edge	589	118	536
2.6	Space optics luminous edge UGR>19	308	118	281
6.0	General light (microtextured)	588	98	247
6.0	General light (smoky)	129	22	55

UNIT LOAD (W/ft)	IN DIRECT OPTIC	UNIT LUMEN (lm/ft)	EFFICACY (lm/W)	UNIT MAX CANDELA (cd)
2.2	General light	231	105	79
1.3	General light UGR>19	139	107	47

¹ Data for 3000K CRI 90

Source:	White LED (LM-80 tested) 2700K : 90CRI, 3000K : 90CRI, 3500K : 90CRI, 4000K : 90CRI.
Lumen maintenance:	90% of initial lumens at 50 000 hours (L90 B10)
Optics:	Space optics (luminous edge and hidden edge), UGR<19, General light.
Material:	Body: extruded aluminum profile Reflector and baffle: translucent textured PMMA raster Diffuser: opal frosted PMMA End caps: die-cast zamak
Mounting:	Pendant, wall and ceiling to floor systems
Electrical:	48Vdc remote LED driver. See remote LED driver options.
Dimming:	LTE: TRIAC and ELV (120V only), down to 1% D10: 0-10V (120-277V), down to 1% DA: DALI (120-277V), down to 1% CAS: Casambi (120-277V), down to 1% See dimmable remote options.
Finish:	Body: White (RAL 9016), Black, Titanium, Sapphire blue The end caps finish always match the colour of the bodies
Weight:	0.37 lb/ft (0.56kg/m)
Warranty:	5 year limited warranty.
Ratings:	IP20
Certification:	Dry location



PRE-CONFIGURED VERSIONS ORDERING INFO

PRODUCT CODE



MODEL	SHAPE	DIMENSION	LED	INDIRECT OPTIC	DIRECT OPTIC	VOLTAGE	FINISH (BODY / OPTIC)
ILIBP Libera pendant	LI Linear RE Rectangular and Square US "U" Shape LS "L" Shape	LINEAR	927 2700K, 90CRI	NO No indirect	SF Space optics luminous edge	REM Remote	SPACE OPTICS
		XX2 2' 2 ¹⁵ / ₁₆ " (684mm)	930 3000K, 90CRI	GL General light ¹	SL Space optics hidden edge		G0 White / Transparent white
		XX4 3' 8 ⁷ / ₁₆ " (1140mm)	935 3500K, 90CRI	GC UGR<19 ²	GC Space optics hidden edge UGR<19		G1 Black / Transparent black
		XX6 5' 11 ¹³ / ₁₆ " (1824mm)	940 4000K, 90CRI		GL General light		G2 Black / Transparent white
		XX8 7' 5 ³ / ₄ " (2280mm)					M6 White / Transparent black
		RECTANGULAR, L AND U SHAPE					P9 Titanium / Transparent white
		2X2 2' 2 ¹⁵ / ₁₆ " x 2' 2 ¹⁵ / ₁₆ " (684mm x 684mm)					Q0 Titanium / Transparent black
		4X4 3' 8 ⁷ / ₁₆ " x 3' 8 ⁷ / ₁₆ " (1140mm x 1140mm)					Q1 Sapphire blue / Transparent white
		6X6 5' 11 ¹³ / ₁₆ " x 5' 11 ¹³ / ₁₆ " (1824mm x 1824mm)					Q2 Sapphire blue / Transparent black
		8X8 7' 5 ³ / ₄ " x 7' 5 ³ / ₄ " (2280mm x 2280mm)					GENERAL LIGHT OPTICS
		2X4 2' 2 ¹⁵ / ₁₆ " x 3' 8 ⁷ / ₁₆ " (684mm x 1140mm)					P2 White / Microtextured
		2X6 2' 2 ¹⁵ / ₁₆ " x 5' 11 ¹³ / ₁₆ " (684mm x 1824mm)					P3 Black / Microtextured
		2X8 2' 2 ¹⁵ / ₁₆ " x 7' 5 ³ / ₄ " (684mm x 2280mm)					P4 Sapphire blue / Microtextured
		4X6 3' 8 ⁷ / ₁₆ " x 5' 11 ¹³ / ₁₆ " (1140mm x 1824mm)					P5 Titanium / Microtextured
		4X8 3' 8 ⁷ / ₁₆ " x 7' 5 ³ / ₄ " (1140mm x 2280mm)					P6 White / Smoky
		6X8 5' 11 ¹³ / ₁₆ " x 7' 5 ³ / ₄ " (1824mm x 2280mm)					B9 Black / Smoky
							P7 Sapphire blue / Smoky
							P8 Titanium / Smoky

1 Available only for SF, SL and GL direct optic.
2 Available only for GC direct optic.
N.B.: Each pre-configured version comes with its sets of accessories (see page 5 for details). The accessories finish always match the colour of the bodies modules chosen.

ACCESSORIES

☐ 626C - T-bar mounting kit for grid ceiling ¹

Quantity:

1 See instruction sheet for details

REMOTE LED DRIVER OPTIONS (TO BE ORDERED SEPARATELY)

“LI” LINEAR

0-10V

Space optics UGR>19 NO-GC	Space optics UGR>19 + ledstrip uplight GC-GC	General light NO-GL	General light + ledstrip uplight GL-GL	Space optics NO-SF/SL	Space optics + ledstrip uplight GL-SF/SL

DALI

Space optics UGR>19 NO-GC	Space optics UGR>19 + ledstrip uplight GC-GC	General light NO-GL	General light + ledstrip uplight GL-GL	Space optics NO-SF/SL	Space optics + ledstrip uplight GL-SF/SL

LTE

Space optics UGR>19 NO-GC	Space optics UGR>19 + ledstrip uplight GC-GC	General light NO-GL	General light + ledstrip uplight GL-GL	Space optics NO-SF/SL	Space optics + ledstrip uplight GL-SF/SL

CASAMBI

Space optics UGR>19 NO-GC	Space optics UGR>19 + ledstrip uplight GC-GC	General light NO-GL	General light + ledstrip uplight GL-GL	Space optics NO-SF/SL	Space optics + ledstrip uplight GL-SF/SL

RECTANGULAR AND SQUARE

0-10V

Space optics UGR>19 NO-GC	Space optics UGR>19 + ledstrip uplight GC-GC	General light NO-GL	General light + ledstrip uplight GL-GL	Space optics NO-SF/SL	Space optics + ledstrip uplight GL-SF/SL

DALI

Space optics UGR>19 NO-GC	Space optics UGR>19 + ledstrip uplight GC-GC	General light NO-GL	General light + ledstrip uplight GL-GL	Space optics NO-SF/SL	Space optics + ledstrip uplight GL-SF/SL

+

+

LTE

Space optics UGR>19 NO-GC	Space optics UGR>19 + ledstrip uplight GC-GC	General light NO-GL	General light + ledstrip uplight GL-GL	Space optics NO-SF/SL	Space optics + ledstrip uplight GL-SF/SL

CASAMBI

Space optics UGR>19 NO-GC	Space optics UGR>19 + ledstrip uplight GC-GC	General light NO-GL	General light + ledstrip uplight GL-GL	Space optics NO-SF/SL	Space optics + ledstrip uplight GL-SF/SL

REMOTE LED DRIVER OPTIONS (TO BE ORDERED SEPARATELY)

“U” SHAPE

0-10V

Space optics UGR>19 NO-GC	Space optics UGR>19 + ledstrip uplight GC-GC	General light NO-GL	General light + ledstrip uplight GL-GL	Space optics NO-SF/SL	Space optics + ledstrip uplight GL-SF/SL

DALI

Space optics UGR>19 NO-GC	Space optics UGR>19 + ledstrip uplight GC-GC	General light NO-GL	General light + ledstrip uplight GL-GL	Space optics NO-SF/SL	Space optics + ledstrip uplight GL-SF/SL
				+	+

LTE

Space optics UGR>19 NO-GC	Space optics UGR>19 + ledstrip uplight GC-GC	General light NO-GL	General light + ledstrip uplight GL-GL	Space optics NO-SF/SL	Space optics + ledstrip uplight GL-SF/SL

CASAMBI

Space optics UGR>19 NO-GC	Space optics UGR>19 + ledstrip uplight GC-GC	General light NO-GL	General light + ledstrip uplight GL-GL	Space optics NO-SF/SL	Space optics + ledstrip uplight GL-SF/SL

“L” SHAPE

0-10V

Space optics UGR>19 NO-GC	Space optics UGR>19 + ledstrip uplight GC-GC	General light NO-GL	General light + ledstrip uplight GL-GL	Space optics NO-SF/SL	Space optics + ledstrip uplight GL-SF/SL

DALI

Space optics UGR>19 NO-GC	Space optics UGR>19 + ledstrip uplight GC-GC	General light NO-GL	General light + ledstrip uplight GL-GL	Space optics NO-SF/SL	Space optics + ledstrip uplight GL-SF/SL

LTE

Space optics UGR>19 NO-GC	Space optics UGR>19 + ledstrip uplight GC-GC	General light NO-GL	General light + ledstrip uplight GL-GL	Space optics NO-SF/SL	Space optics + ledstrip uplight GL-SF/SL

CASAMBI


Space optics UGR>19 NO-GC	Space optics UGR>19 + ledstrip uplight GC-GC	General light NO-GL	General light + ledstrip uplight GL-GL	Space optics NO-SF/SL	Space optics + ledstrip uplight GL-SF/SL

DRIVER BOX MODEL DESCRIPTION (TO BE ORDERED SEPARATELY)

MODEL	CONSTANT VOLTAGE	WATTAGE	VOLTAGE	DIMMING PROTOCOL	
4448 10" x 8" x 4" (250 x 203 x 102mm)	48 48Vdc	040 to 200 from 40W to 200W	UNV 120V-277V	D10 0-10V (down to 1%) DALI (down to 1%) CASAMBI (down to 1%) LTE (down to 5%)	
4450 8" x 8" x 4" (203 x 203 x 102mm)					


PRE-CONFIGURED VERSIONS DIMENSIONS

“LI” LINEAR

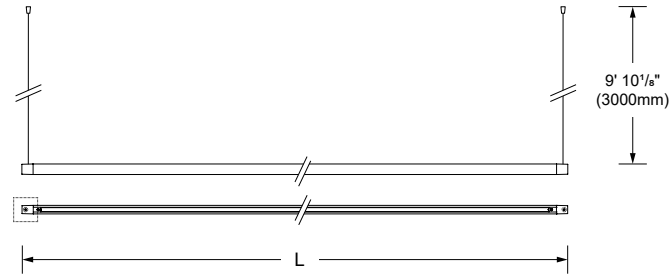


DIMENSION CODE	“LI” LINEAR
	L
XX2	2' 2 15/16" (684mm)
XX4	3' 8 7/8" (1140mm)
XX6	5' 11 13/16" (1824mm)
XX8	7' 5 3/4" (2280mm)


RECTANGULAR AND SQUARE

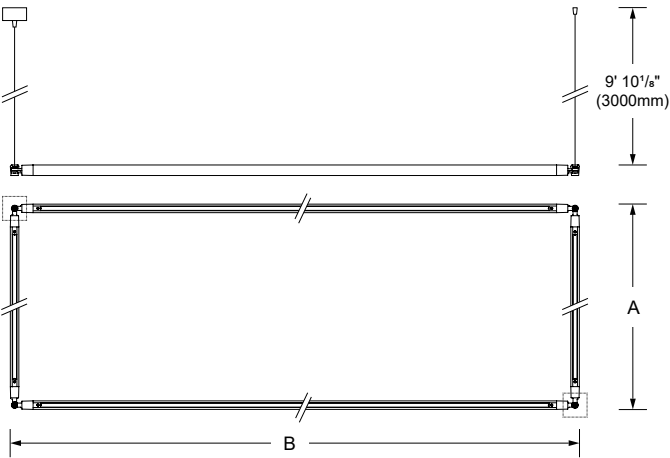

“U” SHAPE

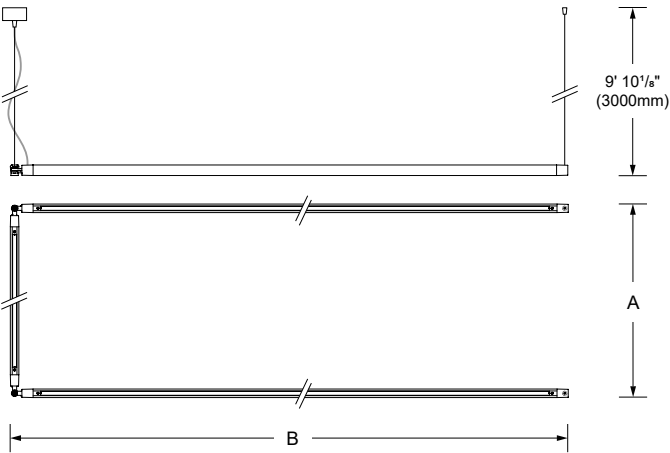

“L” SHAPE

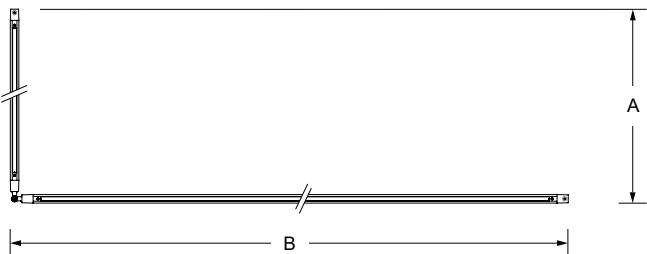


ACTUAL DIMENSION

DIMENSION CODE	RECTANGULAR		“U” SHAPE		“L” SHAPE	
	A	B	A	B	A	B
2X2	2' 7 3/4" (806mm)	2' 7 3/4" (806mm)	2' 6 1/4" (769mm)	2' 7 3/4" (806mm)	2' 6 1/4" (769mm)	2' 6 1/4" (769mm)
4X4	4' 1 11/16" (1262mm)	4' 1 11/16" (1262mm)	4' 0 3/16" (1225mm)	4' 1 11/16" (1262mm)	4' 0 3/16" (1225mm)	4' 0 3/16" (1225mm)
6X6	6' 4 5/8" (1946mm)	6' 4 5/8" (1946mm)	6' 3 1/8" (1909mm)	6' 4 5/8" (1946mm)	6' 3 1/8" (1909mm)	6' 3 1/8" (1909mm)
8X8	7' 10 9/16" (2402mm)	7' 10 9/16" (2402mm)	7' 9 1/16" (2365mm)	7' 10 9/16" (2402mm)	7' 9 1/16" (2365mm)	7' 9 1/16" (2365mm)
2X4	2' 7 3/4" (806mm)	4' 1 11/16" (1262mm)	2' 6 1/4" (769mm)	4' 1 11/16" (1262mm)	2' 6 1/4" (769mm)	4' 0 3/16" (1225mm)
2X6	2' 7 3/4" (806mm)	6' 4 5/8" (1946mm)	2' 6 1/4" (769mm)	6' 4 5/8" (1946mm)	2' 6 1/4" (769mm)	6' 3 1/8" (1909mm)
2X8	2' 7 3/4" (806mm)	7' 10 9/16" (2402mm)	2' 6 1/4" (769mm)	7' 10 9/16" (2402mm)	2' 6 1/4" (769mm)	7' 9 1/16" (2365mm)
4X6	4' 1 11/16" (1262mm)	6' 4 5/8" (1946mm)	4' 0 3/16" (1225mm)	6' 4 5/8" (1946mm)	3' 11 5/8" (1210mm)	6' 3 1/8" (1909mm)
4X8	4' 1 11/16" (1262mm)	7' 10 9/16" (2402mm)	4' 0 3/16" (1225mm)	7' 9 1/16" (2379mm)	3' 11 5/8" (1210mm)	7' 9 1/16" (2365mm)
6X8	6' 4 5/8" (1946mm)	7' 10 9/16" (2402mm)	6' 3 1/8" (1909mm)	7' 10 9/16" (2402mm)	6' 2 9/16" (1894mm)	7' 9 1/16" (2365mm)


N.B.: 8 length modules are provided with an additional intermediate pendant mounting kit (cod. PE64)

MODULE OPTICS

DIRECT

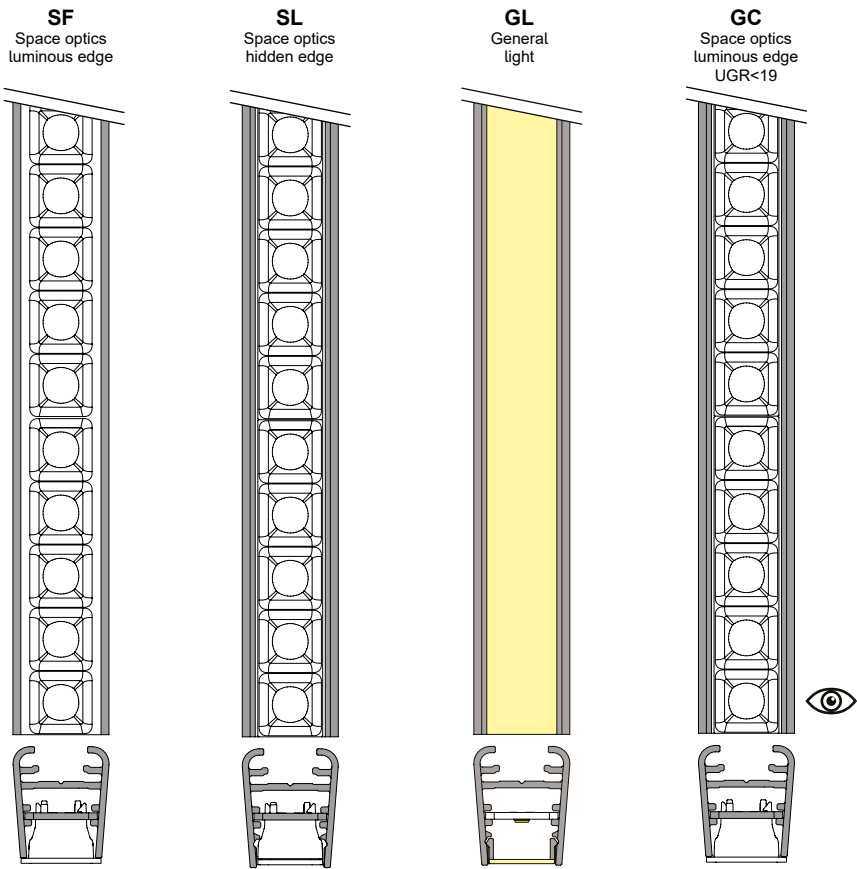

INDIRECT (LED STRIP)

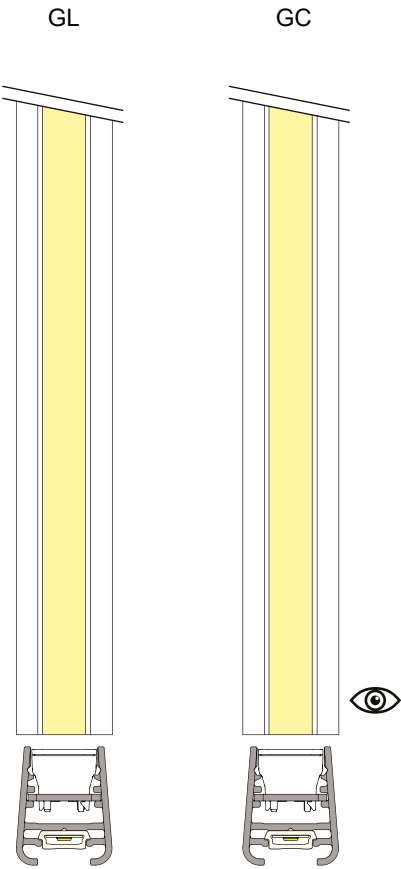

MODULES SPACE OPTICS FINISH EXAMPLES


LUMINOUS EDGE




HIDDEN EDGE




MODULES GENERAL LIGHT FINISH EXAMPLES (LUMINOUS EDGE)

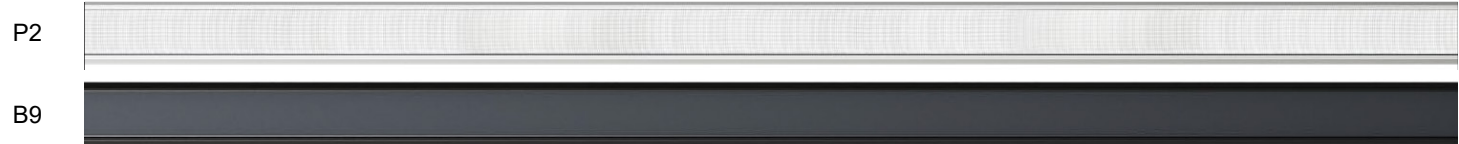

PENDANT MOUNTING ACCESSORIES

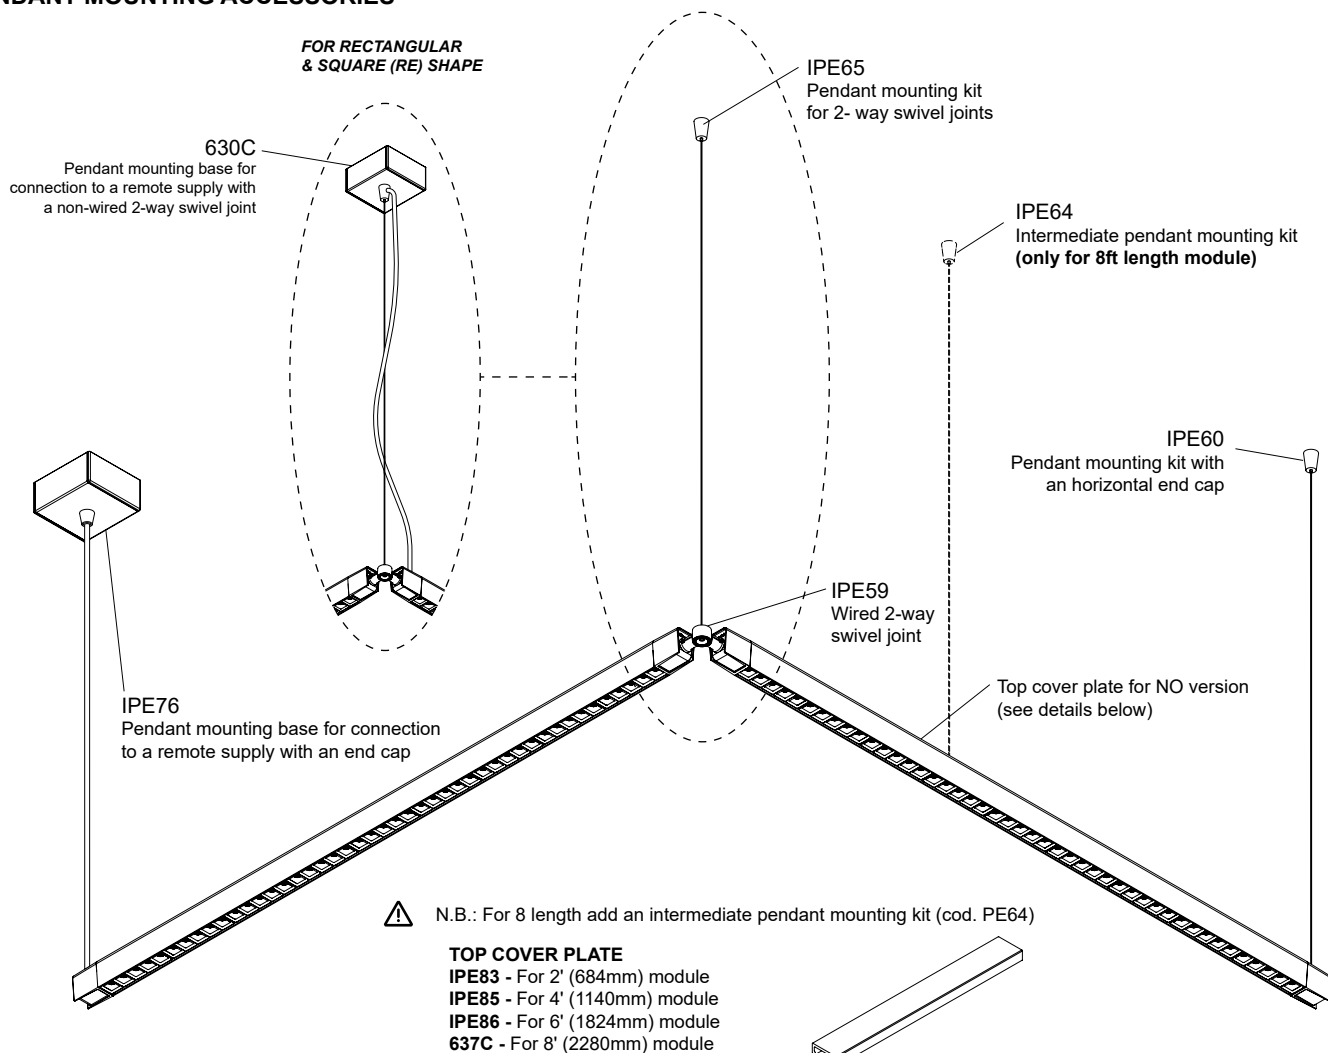

PENDANT MOUNTING ACCESSORIES FINISH ¹

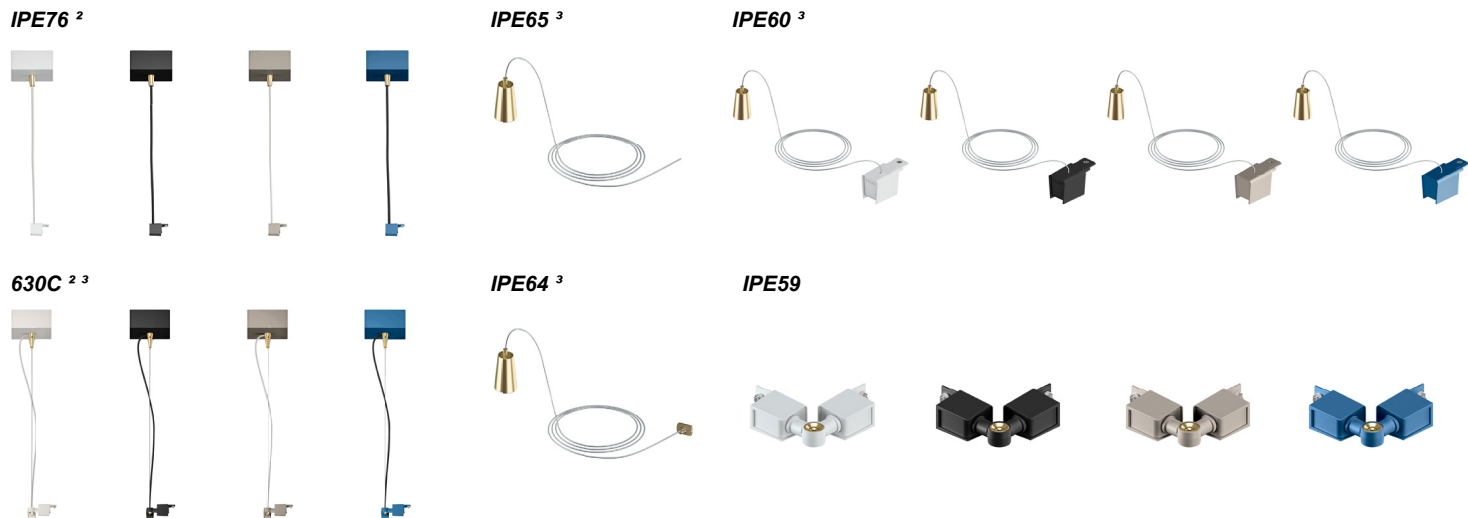

¹ Accessories finish always match the color of the modules bodies chosen

² Power cable length 9' 10 1/8" (300mm)

³ Aircraft cable length 9' 10 1/8" (300mm)

INCLUDED PENDANT MOUNTING BASE FOR CONNECTION TO A REMOTE SUPPLY ¹

RECTANGULAR & SQUARE SHAPE

DIMENSION CODE	SPF / SPL		UGR		GL	
	DOWN	UP&DOWN	DOWN	UP&DOWN	DOWN	UP&DOWN
2'X2'	1	1	1	1	1	1
4'X4'	1	2	1	1	1	2
6'X6'	2	2	1	2	2	4
8'X8'	2	4	1	2	2	4
2'X4'	1	1	1	1	1	2
2'X6'	1	2	1	1	2	2
2'X8'	2	2	1	1	2	2
4'X6'	2	2	1	1	2	2
4'X8'	2	2	1	1	2	4
6'X8'	2	2	1	2	2	4

U SHAPE

DIMENSION CODE	SF / SL		UGR		GL	
	DOWN	UP&DOWN	DOWN	UP&DOWN	DOWN	UP&DOWN
2'X2'	1	1	1	1	1	1
4'X4'	1	1	1	1	1	1
6'X6'	1	2	1	1	2	2
8'X8'	2	2	1	1	2	2
2'X4'	1	1	1	1	1	1
2'X6'	1	2	1	1	1	2
2'X8'	1	2	1	1	2	2
4'X6'	1	2	1	1	1	2
4'X8'	1	2	1	1	2	2
6'X8'	2	2	1	1	2	2

L SHAPE

DIMENSION CODE	SF / SL		UGR		GL	
	DOWN	UP&DOWN	DOWN	UP&DOWN	DOWN	UP&DOWN
2'X2'	1	1	1	1	1	1
4'X4'	1	1	1	1	1	1
6'X6'	1	1	1	1	1	1
8'X8'	1	2	1	1	1	2
2'X4'	1	1	1	1	1	1
2'X6'	1	1	1	1	1	1
2'X8'	1	1	1	1	1	1
4'X6'	1	1	1	1	1	1
4'X8'	1	1	1	1	1	1
6'X8'	1	1	1	1	1	2

¹The linear shapes come always with one feed

PHOTOMETRIC DATA PER MODULE


Visit iguzzini.com/us for complete photometric data.

SPACE OPTICS - LUMINOUS EDGE / HIDDEN EDGE 5W/ft

CCT (K)	CRI	LOAD (W)	LENGTH ft (mm)	OPTIC	LUMENS (lm)	EFFICACY (lm / W)	MAX CANDELA (cd)	MODELS
3000K	90	11.2W	2' 2 ¹⁵ / ₁₆ " (684mm)	SF / SL Luminous edge / Hidden edge	1 319	117	1 294	ILIBPLI-XX2-930-XX-SX-REM-XX
		18.7W	3' 8 ⁷ / ₈ " (1 140mm)		2 207	118	2 164	ILIBPLI-XX4-930-XX-SX-REM-XX
		29.9W	5' 11 ¹³ / ₁₆ " (1 824mm)		3 527	118	3 458	ILIBPLI-XX6-930-XX-SX-REM-XX
		37.4W	7' 5 ³ / ₄ " (2 279mm)		4 409	117	4 322	ILIBPLI-XX8-930-XX-SX-REM-XX


SF / SL

Luminous edge / Hidden edge
11.2W (3000K, 90CRI)

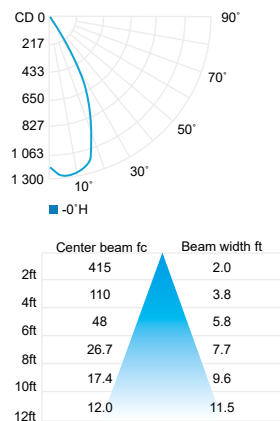


SF / SL

Luminous edge / Hidden edge
18.7W (3000K, 90CRI)

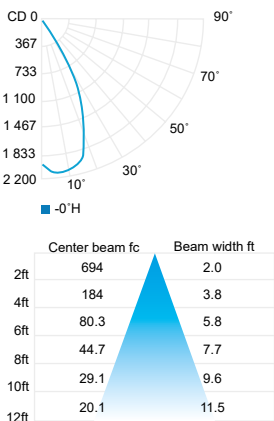


SF / SL

Luminous edge / Hidden edge
29.9W (3000K, 90CRI)

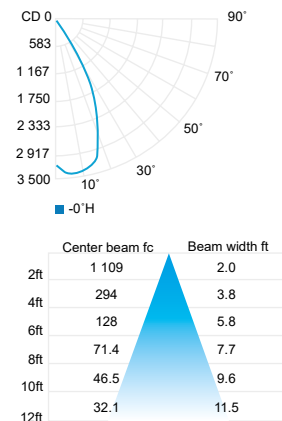

SF / SL

Luminous edge / Hidden edge
37.4W (3000K, 90CRI) *

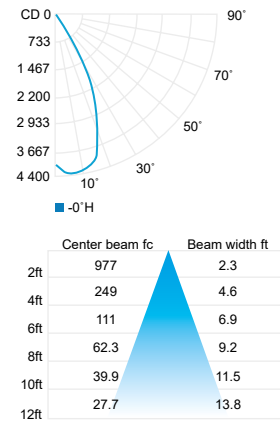

CCT options	2700K	3000K	3500K	4000K
CRI options	90CRI	90CRI	90CRI	90CRI
Multiplier	0.94	1	0.97	1

* Data to be confirmed.

PHOTOMETRIC DATA PER MODULE


Visit iguzzini.com/us for complete photometric data.

SPACE OPTICS UGR - LUMINOUS EDGE 2.6W/ft

CCT (K)	CRI	LOAD (W)	LENGTH ft (mm)	OPTIC	LUMENS (lm)	EFFICACY (lm / W)	MAX CANDELA (cd)	MODELS
3000K	90	5.8W	2' 2 ¹⁵ / ₁₆ " (684mm)	GC UGR<19 - Luminous edge	689	117	627	ILIBPLI-XX2-930-XX-GC-REM-XX
		9.7W	3' 8 ⁷ / ₈ " (1 140mm)		1 154	118	1 050	ILIBPLI-XX4-930-XX-GC-REM-XX
		15.5W	5' 11 ¹³ / ₁₆ " (1 824mm)		1 851	118	1 684	ILIBPLI-XX6-930-XX-GC-REM-XX
		19.4W	7' 5 ³ / ₄ " (2 279mm)		2 314	119	2 106	ILIBPLI-XX8-930-XX-GC-REM-XX

GC UGR<19


5.8W (3000K, 90CRI)



	Center beam fc	Beam width ft
2ft	212	2.0
4ft	56.2	3.9
6ft	24.5	5.9
8ft	13.6	7.9
10ft	8.88	9.7
12ft	6.12	11.7

GC UGR<19


9.7W (3000K, 90CRI)



	Center beam fc	Beam width ft
2ft	354	2.0
4ft	94.1	3.9
6ft	41.0	5.9
8ft	22.8	7.9
10ft	14.9	9.7
12ft	10.2	11.7

GC UGR<19


15.5W (3000K, 90CRI)



	Center beam fc	Beam width ft
2ft	569	2.0
4ft	151	3.9
6ft	65.7	5.9
8ft	36.6	7.9
10ft	23.9	9.7
12ft	16.4	11.7

GC UGR<19

19.4W (3000K, 90CRI) ¹



	Center beam fc	Beam width ft
2ft	511	2.3
4ft	128	4.6
6ft	56.8	6.9
8ft	31.9	9.2
10ft	20.4	11.5
12ft	14.2	13.8

CCT options	2700K	3000K	3500K	4000K
CRI options	90CRI	90CRI	90CRI	90CRI
Multiplier	0.94	1	0.96	0.99

¹ Data to be confirmed.

PHOTOMETRIC DATA PER MODULE


Visit iguzzini.com/us for complete photometric data.

LIGHT MODULE WITH GENERAL LIGHTING OPTICS (MICROTEXTURED) ¹


CCT (K)	CRI	LOAD (W)	LENGTH ft (mm)	OPTIC	LUMENS (lm)	EFFICACY (lm / W)	MAX CANDELA (cd)	MODELS
3000K	90	13.4W	2' 2 ¹⁵ / ₁₆ " (684mm)	GL General light with microtextured	1 318	21	553	ILIBPLI-XX2-930-XX-GL-REM-XX
		22.3W	3' 8 ⁷ / ₈ " (1 140mm)		2 197		922	ILIBPLI-XX4-930-XX-GL-REM-XX
		35.6W	5' 11 ¹³ / ₁₆ " (1 824mm)		3 516		1 475	ILIBPLI-XX6-930-XX-GL-REM-XX
		44.5W	7' 5 ³ / ₄ " (2 279mm)		4 345		588	ILIBPLI-XX8-930-XX-GL-REM-XX

¹ Available for P2, P3, P4 or P5 finish


GL General light with microtextured 13.4W (3000K, 90CRI)

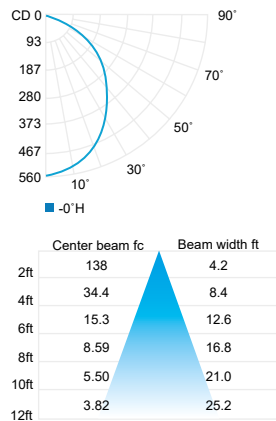


GL General light with microtextured 22.3W (3000K, 90CRI)

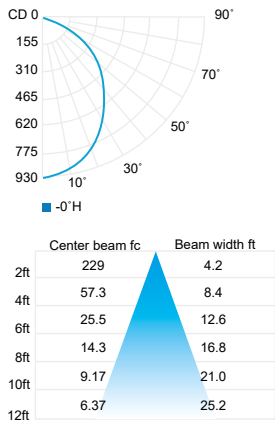

GL General light with microtextured 35.6W (3000K, 90CRI)

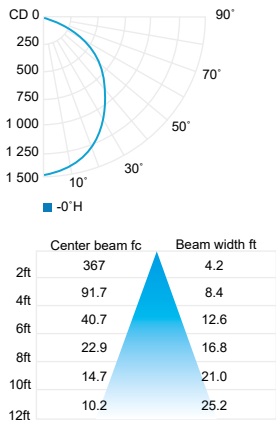

GL General light with microtextured 44.5W(3000K, 90CRI) ¹

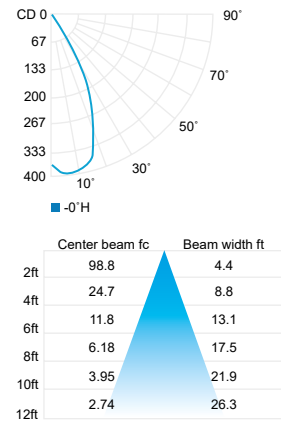

CCT options	2700K	3000K	3500K	4000K
CRI options	90CRI	90CRI	90CRI	90CRI
Multiplier	0.97	1	0.97	1

¹ Data to be confirmed.

PHOTOMETRIC DATA PER MODULE


Visit iguzzini.com/us for complete photometric data.

LIGHT MODULE WITH GENERAL LIGHTING OPTICS (SMOKY) ¹


CCT (K)	CRI	LOAD (W)	LENGTH ft (mm)	OPTIC	LUMENS (lm)	EFFICACY (lm / W)	MAX CANDELA (cd)	MODELS
3000K	90	13.4W	2' 2 ¹⁵ / ₁₆ " (684mm)	GL General light with smoky	290	21	123	ILIBPLI-XX2-930-XX-GL-REM-XX
		22.3W	3' 8 ⁷ / ₈ " (1 140mm)		483		205	ILIBPLI-XX4-930-XX-GL-REM-XX
		35.6W	5' 11 ¹³ / ₁₆ " (1 824mm)		772		328	ILIBPLI-XX6-930-XX-GL-REM-XX
		44.5W	7' 5 ³ / ₄ " (2 279mm)		966		129	ILIBPLI-XX8-930-XX-GL-REM-XX

¹ Available for P6, B9, P7 or P8 finish


GL General light with smoky
13.4W (3000K, 90CRI)

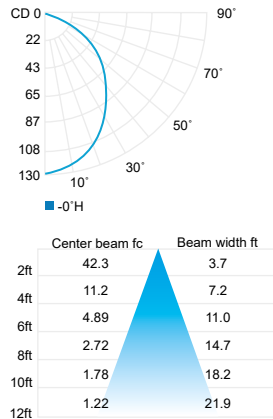


GL General light with smoky
22.3W (3000K, 90CRI)

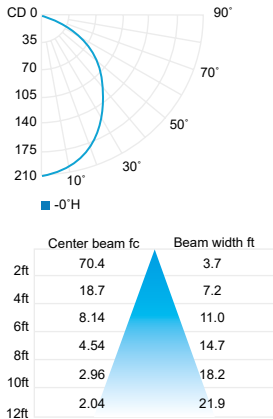

GL General light with smoky
35.6W (3000K, 90CRI)

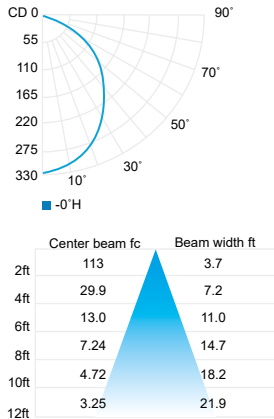

GL General light with smoky
44.5W (3000K, 90CRI) ¹

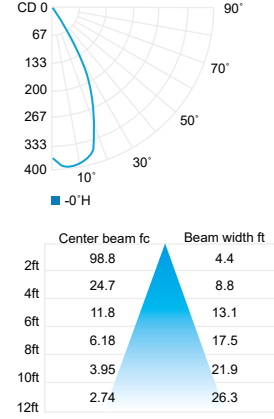

CCT options	2700K	3000K	3500K	4000K
CRI options	90CRI	90CRI	90CRI	90CRI
Multiplier	0.97	1	0.97	1

¹ Data to be confirmed.


PHOTOMETRIC DATA PER MODULE

Visit iguzzini.com/us for complete photometric data.


LED STRIP FOR UP LIGHT - GENERAL LIGHTING 5W/ft

CCT (K)	CRI	LOAD (W)	LENGTH ft (mm)	OPTIC	LUMENS (lm)	EFFICACY (lm / W)	MAX CANDELA (cd)	MODELS
3000K	90	3.2W	1' 5 ¹¹ / ₁₆ " (450mm)	GL General light	430	134	147	ILIBPLI-XX2-930-GL-XX-REM-XX
		6.4W	2' 11 ⁷ / ₁₆ " (900mm)		850	133	290	ILIBPLI-XX4-930-GL-XX-REM-XX
		11.2W	5' 2" (1 610mm)		1 495	133	511	ILIBPLI-XX6-930-GL-XX-REM-XX
		14.4W	7' 5 ³ / ₄ " (2 279mm)		1 935	134	661	ILIBPLI-XX8-930-GL-XX-REM-XX


GL General light
3.2W (3000K, 90CRI)




GL General light
6.4W (3000K, 90CRI)

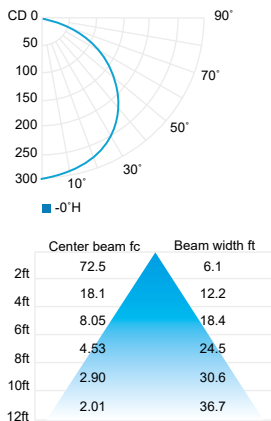

GL General light
11.2W (3000K, 90CRI)

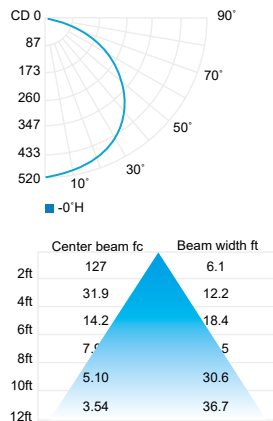

GL General light
14.4W(3000K, 90CRI) ¹

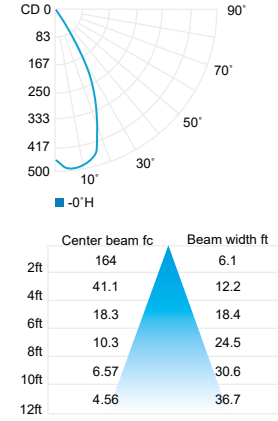

CCT options	2700K	3000K	3500K	4000K
CRI options	90CRI	90CRI	90CRI	90CRI
Multiplier	0.93	1	1	1

¹ Data to be confirmed.

PHOTOMETRIC DATA PER MODULE


Visit iguzzini.com/us for complete photometric data.

LED STRIP FOR UP LIGHT - UGR<19 - OPTIC 1.3W/ft

CCT (K)	CRI	LOAD (W)	LENGTH ft (mm)	OPTIC	LUMENS (lm)	EFFICACY (lm / W)	MAX CANDELA (cd)	MODELS
3000K	90	1.9W	1' 5 ¹¹ / ₁₆ " (450mm)	GC UGR<19	260	137	89	ILIBPLI-XX2-930-XX-GC-REM-XX
		3.8W	2' 11 ⁷ / ₁₆ " (900mm)		505	133	173	ILIBPLI-XX4-930-XX-GC-REM-XX
		6.6W	5' 2" (1 610mm)		890	135	305	ILIBPLI-XX6-930-XX-GC-REM-XX
		8.6W	7' 5 ³ / ₄ " (2 279mm)		1 170	134	400	ILIBPLI-XX8-930-XX-GC-REM-XX


GC UGR<19

1.9W (3000K, 90CRI)




GC UGR<19

3.8W (3000K, 90CRI)




GC UGR<19

6.6W (3000K, 90CRI)



GC UGR<19

8.6W (3000K, 90CRI) ¹



CCT options	2700K	3000K	3500K	4000K
CRI options	90CRI	90CRI	90CRI	90CRI
Multiplier	0.94	1	1	1

¹ Data to be confirmed.