

**TRICK**  
Wall Washer - Integral

Project: \_\_\_\_\_  
Type: \_\_\_\_\_



Surface mounted luminaire with a low physical presence that is ideal for highlighting the details on buildings' facades. Design by Dean Skira.

**PHOTOMETRIC SUMMARY**

Output	Size	Lumens (lm)	Efficacy (lm/W)	Max Candela (cd)
BO	S - Small	192	48	63
BO	M - Medium	192	48	63

For 3000K, 80CRI. Consult [page 3](#) for full photometric data.

**FINISH OPTIONS**





Consult factory for custom finishes

**OPTIC OPTIONS**



Wall Washer

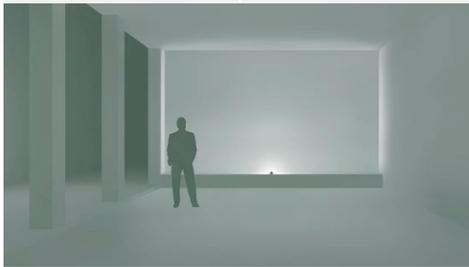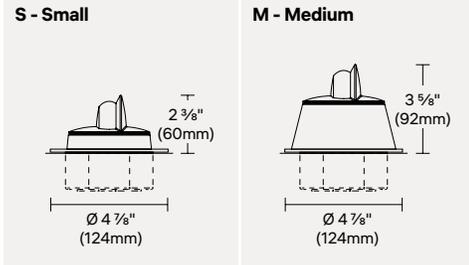

**FEATURES**

- Additional light effect available with integral driver: *180° Light Blade, 360° Light Blade & Radial Effect*
- Additional light effect available with remote driver: *180° Light Blade, 360° Light Blade, Radial Effect & Wall Washer*
- Consult factory for further customization
- Full specification available [page 2](#)



**ORDERING INFO**

PRODUCT CODE

EXAMPLE: ITRC-S-BO-JB-830-WW-120-01

MODEL	SIZE	OUTPUT	MOUNTING	LED	OPTIC	VOLTAGE	FINISH
ITRC Trick	<b>S</b> Small	<b>BO</b> Base Output (4W)	<b>JB</b> Surface mounted junction box	<b>830</b> 3000K, 80CRI	<b>WW</b> Wall Washer	<b>120</b> 120V	<b>01</b> White
	<b>M</b> Medium						<b>15</b> Gray
							<b>RAL#<sup>1</sup></b> Custom RAL

<sup>1</sup> Additional fees may apply for custom finish. Contact factory for details.

# TRICK Wall Washer - Integral

Project: \_\_\_\_\_  
Type: \_\_\_\_\_

## SPECIFICATIONS

### LUMEN MAINTENANCE

80% of initial lumens at 100 000 hours (L80 B10) T77°F (25°C)  
80% of initial lumens at 100 000 hours (L80 B10) T104°F (40°C)

### OPTICS

Wall washer effect.

### MATERIAL

**Body:** Die-cast aluminum  
**Diffuser:** PMMA lens  
**Hardware:** Stainless steel screws

### MOUNTING

Wall or ceiling mounted, to be installed on a standard octagonal 4" junction box. Floor mounting in dry location only (interior).

### ELECTRICAL

Integral high efficiency LED driver, rated at 50 000 hours. 120V.

### FINISH

Gray (RAL9007) and White (RAL9016) painted with a high level of weather and UV resistance. The semi-gloss finish coating is electrostatically applied durable acrylic enamel baked at high temperatures for superior color retentive finish. We provide RAL numbers that are similar, but we cannot guarantee an exact color match. For a more accurate color and gloss match, please contact customer service for a sample chip.

### OPERATING TEMPERATURE


**BO:** -30°C to 50°C (-22°F to 122°F)

### WEIGHT


**Small:** 0.5lb (0.23kg)  
**Medium:** 1.25lb (0.56kg)

## DIMENSIONS

### S - SMALL

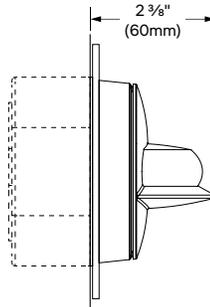


SIDE VIEW

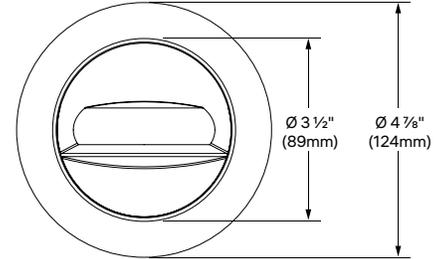


FRONT VIEW

### M - MEDIUM

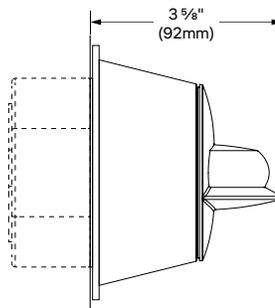


SIDE VIEW

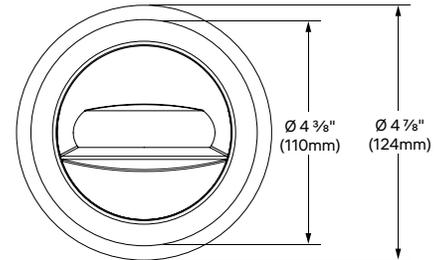

FRONT VIEW

## FAMILY OVERVIEW

Line voltage version with integral LED drive

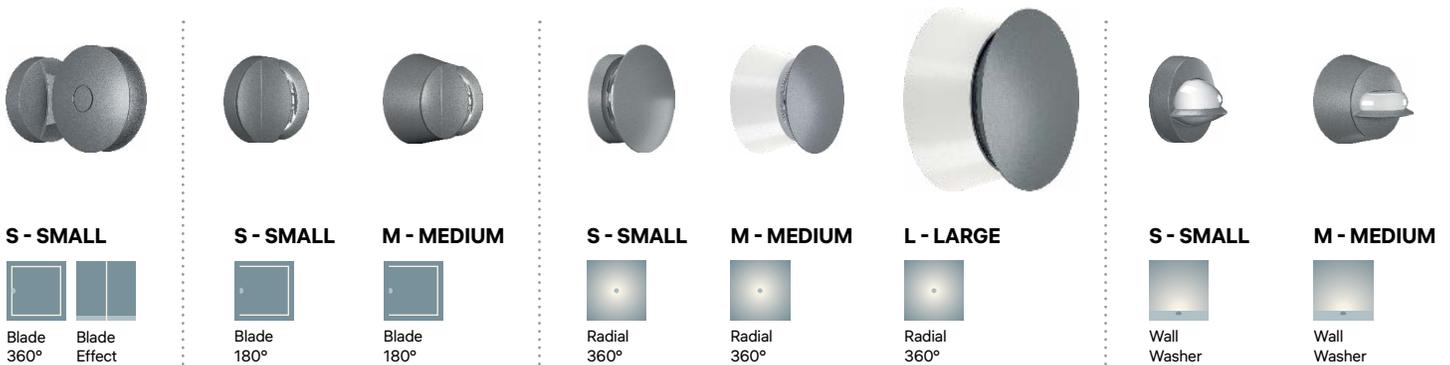

**TRICK**  
**Wall Washer - Integral**


Project: \_\_\_\_\_  
 Type: \_\_\_\_\_

**PHOTOMETRIC DATA**

**S - SMALL**

CCT (K)	CRI	OUTPUT	POWER (W)	OPTIC	LUMENS (lm)	EFFICACY (lm/W)	MAX CANDELA (cd)	MODELS
3000	80	BO	4	Wall Washer	192	48	63	ITRC-S-BO-XX-830-WW

Efficacy based on IESNA LM-79 test reports. Visit [iguzzini.com/us](http://iguzzini.com/us) for complete photometric data.

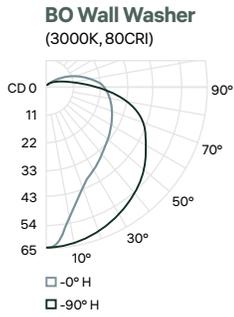

**M - MEDIUM**

CCT (K)	CRI	OUTPUT	POWER (W)	OPTIC	LUMENS (lm)	EFFICACY (lm/W)	MAX CANDELA (cd)	MODELS
3000	80	BO	4	Wall Washer	192	48	63	ITRC-M-BO-XX-830-WW

Efficacy based on IESNA LM-79 test reports. Visit [iguzzini.com/us](http://iguzzini.com/us) for complete photometric data.

