

1 CIRCUIT TRACK


SURFACE / PENDANT

Type:


SPECIFICATION SHEET

Project :

Page: 1 of 3

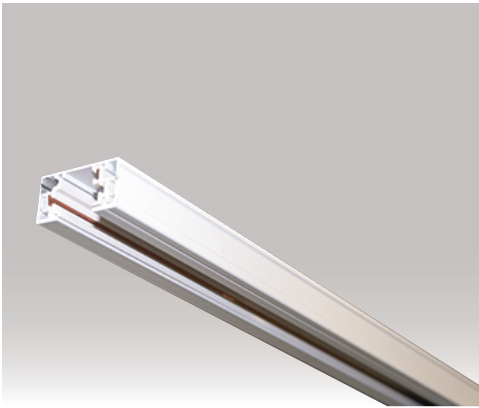

Material:	Body: Extruded aluminum.
Mounting:	Surface mount or suspended.
Electrical:	120V one circuit 20A with line voltage dimming capability.
Finish:	Track: White, black or gray painted. Accessories: White, black or gray color.
Warranty:	5 year limited warranty.
Ratings:	IP00
Certification:	cULus listed for dry location

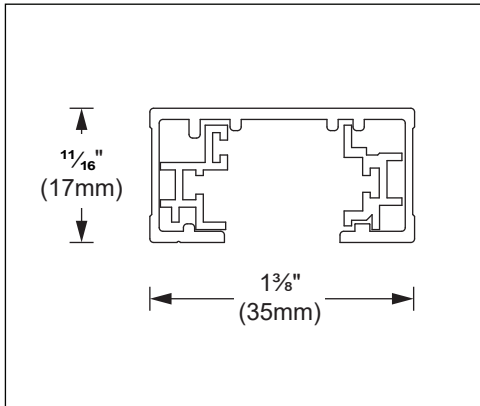

ORDERING INFO

- S1 -
TRACK



MODEL⁽¹⁾

- 8004** - 4ft long track **8008** - 8ft long track

FINISH


- 01** - White **02** - Black **10** - Gray

⁽¹⁾ Every track ordered is supplied with 1 end cap. Additional end cap must be ordered separately if necessary.

ELECTRICAL COMPONENTS (TO BE ORDERED SEPARATELY)

FINISH **01** - White **02** - Black **10** - Gray


- 8014-S1** - End feeder with 4" Jbox mounting kit and square plate



- 8019-S1** - End feeder (Feed from top)




- 8015-S1** - End feeder for BX cable (Feed from side only)




- 8020-S1** - Straight connector




- 8017-S1** - Straight feedable connector




- 8022-S1** - L-shape feedable connector



- 8024-S1** - T-shape feedable connector



- 8026-S1** - X-shape feedable connector




TRACK LIMITER (TO BE ORDERED SEPARATELY)

- **S1** - - - **- 120 -**
Current limiter

FINISH 01 - White 02 - Black

8019CB - Live end feed with current limiters (breaker on the side)



FEED AMPERAGE


- 1.00 - 1A
 -2.00 - 2A
 -3.00 - 3A
 -5.00 - 5A
 -7.00 - 7A

PERCENTAGE OF RATED CURRENT VS TRIP TIME IN SECONDS AT +25°C (VERTICAL MOUNT)

100%	135%	150%	200%	400%	600%	800%
NO TRIP	3 to 70	2 to 40	1 to 15	.10 to 4	.015 to 2	.01 to .8


8017CB - Straight feedable connector with current limiters (breaker on the side)

Single feed Double feed



FEED 1 AMPERAGE FEED 2 AMPERAGE


- | | |
|-------------------------------------|-------------------------------------|
| <input type="checkbox"/> -1.00 - 1A | <input type="checkbox"/> -1.00 - 1A |
| <input type="checkbox"/> -2.00 - 2A | <input type="checkbox"/> -2.00 - 2A |
| <input type="checkbox"/> -3.00 - 3A | <input type="checkbox"/> -3.00 - 3A |
| <input type="checkbox"/> -5.00 - 5A | <input type="checkbox"/> -5.00 - 5A |
| <input type="checkbox"/> -7.00 - 7A | <input type="checkbox"/> -7.00 - 7A |



ACCESSORIES (TO BE ORDERED SEPARATELY)

FINISH 01 - White 02 - Black 10 - Gray

8016-S1 - Floating feeder



8027-S1 - End cap (1pc)



MOUNTING (TO BE ORDERED SEPARATELY)

FINISH 01 - White 02 - Black 10 - Gray 20 - White/Gray 21 - White/Black

PENDANT MOUNTING

8013 - Canopy with 5'-5" power cable 5.5A (canopy will match kit color with clear power cable.)



8023 - Pendant mounting kit (For white anchor, select white/gray (20) or white/black (21), otherwise anchor will match color kit.) Includes anchor, 5'-5" aircraft cable and 6" stem (Stem to be installed to the track by others)



T-BAR MOUNTING

8021-S1 - For T-BAR 15/16" (stainless steel finish)

