IMPORTANT SAFETY INSTRUCTIONS:

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. DO NOT INSTALL THE FIXTURE ASSEMBLY CLOSER THAN 6 in FROM ANY CURTAIN OR SIMILAR COMBUSTIBLE MATERIAL. SAFE THESE INSTRUCTIONS.

FIXTURE INSTALLATION


- A REMOVE THE SCREW OF THE JUNCTION BOX. INSTALL BX (BY OTHERS) IN THE JUNCTION BOX. MAKE ALL NECESSARY WIRE CONNECTIONS BETWEEN THE BRANCH CIRCUIT AND THE LUMINAIRE. CLOSE JUNCTION BOX AND SECURE WITH REMOVABLE SCREW.


 OPTIONAL DIMMING CIRCUIT, INCLUDED. REMOVE JUNCTION BOX CAP. DIMMING WIRES PURPLE (+) AND GRAY (-) FOR 0-10V DIMMING. PURPLE AND PURPLE FOR LUTRON HI-LUME A-SERIES BUS SUPPLY.
- B INSERT FIXTURE IN THE CUT-OUT (SEE TABLE PAGE 2).
- C FASTEN WASHER & SCREW PARTIALLY TO ANCHOR KEY, LEAVING A SMALL GAP. INSERT ANCHOR KEYS IN CROSS-SHAPED CUT-OUT AT THE BOTH ANDS OF MULTIPLE LARGE ASSEMBLY. SLIDE ALLEN HEAD SCREW ALONG SLOT. WHEN ANCHOR RESTS ON CEILING SURFACE, TIGHTEN WITH PROVIDED ALLEN KEY.


LAMPING INSTALLATION


D - CLIP-IN THE TWO CONNECTOR ASSEMBLIES TOGETHER. SNAP INER RING IN OUTER RING BY ALIGNING THE TWO RETAINING CLIPS WITH THE HOLDER.

TO ENSURE THE FIXTURE IS TIGHTLY SECURED, PUSH FRAME UPWARDS AGAINST CEILING DURING INSTALLATION. ONE HEAD USE SIDE OF WIRING BOX. ALL OTHER VERSIONS TO USE JUNCTION BOX.

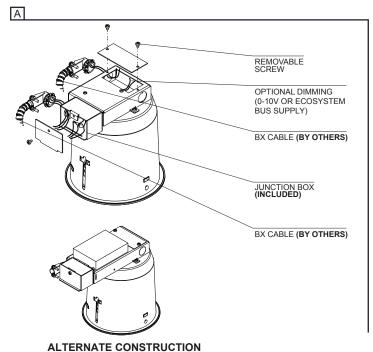

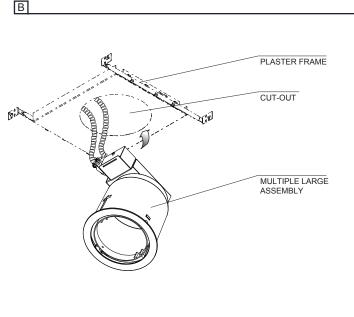

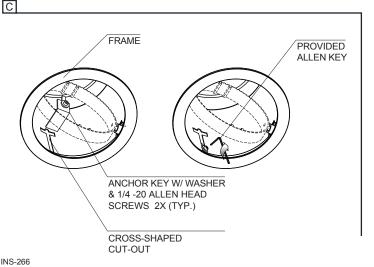

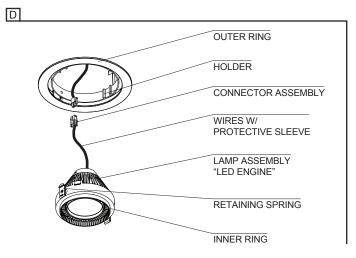

LAST UPDATE: OCTOBER 07, 2015 AP - R3







MULTIPLE LARGE

MODELS: 8208

MODEL	CUT-OUT DIMENSIONS (A)	OVER-ALL DIMENSIONS (B X C)
MUL-210R-KIT W/ 8208	Ø6-3/4"(171mm)	9-1/2"(241mm) X 11"(279mm)



ORDERING INFO

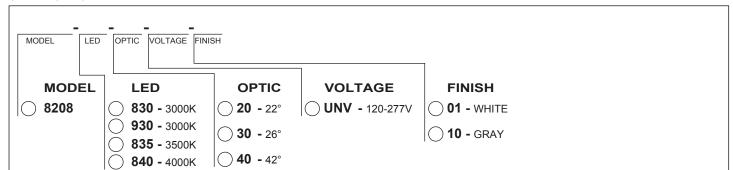

INS-266

LAST UPDATE: OCTOBER 07, 2015 AP - R3

