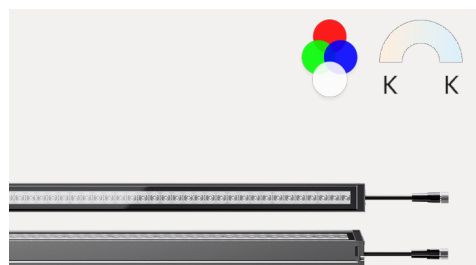


LINEALUCE 27

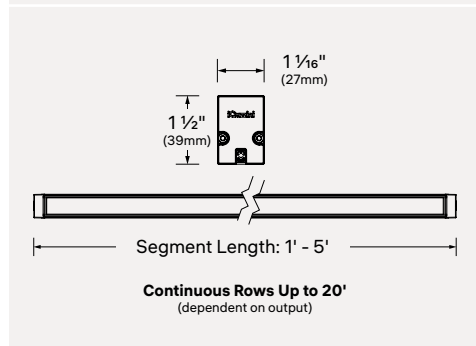
Surface Remote - RGBW & Tunable White

Project: _____

Type: _____



Design: Jean-Michel Wilmotte



PHOTOMETRIC SUMMARY

LED	Optic	Lumens (lm)	Efficacy (lm/W)	Max Candela (cd)
RGBW	SP 10° x10°	260	65	1 403
RGBW	GL NO-DOT 45° x82°	112	24	97
RGBW	WGS 14° x14°	214	53	728
RGBW	WGM 23° x41°	197	49	379
RGBW	WGMF 27° x60°	180	45	277
RGBW	WG NO-DOT 21° x80°	87	17	104
RGBW	ELL 22° x60°	226	56	401

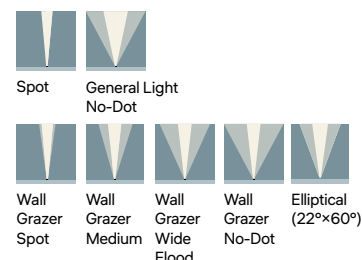
Consult [page 11](#) for tunable White and full photometric data.

FINISH OPTIONS



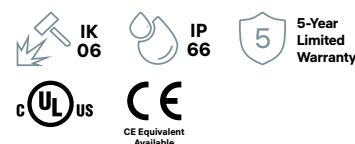
Consult factory for custom finishes

OPTIC OPTIONS



FEATURES

- DMX or DALI (down to 0.1%)
- Additional sizing available with remote driver: [27 \(1.06''\)](#), [37 \(1.50''\)](#), & [47 \(1.85''\)](#)
- Consult factory for further customization
- Full specification available [page 6](#)



ORDERING INFO

PRODUCT CODE

EXAMPLE: ILL27S-05-BO-RGBW830-GL-M2-REM-01-A3

MODEL	LENGTH ¹	OUTPUT	LED	OPTIC	MOUNTING	ARM	VOLTAGE	FINISH	EXT. OPT. ACC. ⁴
ILL27S Linealuce 27 Surface		BO Base Output	RGBW830 RGB White 3000K, 80CRI	SYMMETRICAL SP⁵ Spot 10°x10°	S² Surface Flat Installation No Arm	1² No Arm	REM Remote	01 White	A1 Satin Screen
		RGBW ⁶ 180 to 260 lm/ft, 4.5W/ft	RGBW835 RGB White 3500K, 80CRI	GL General Light, No-Dot 45°x82°	M Arm installation for Height Below 9.5' (3m)	2 Black Short Adjustable 1 5/8" (41mm)		02 Black	A2 Visor
		RGBW ⁶ NO-DOT 87 to 112 lm/ft, 5W/ft	TW82230⁷ Tunable White 2200K to 3000K, 80CRI	GRAZER WGS Spot 14°x14°	U Arm Installation for Height Greater than 9.5' (3m)	3 Steel Short Adjustable 1 5/8" (41mm)		15 Gray	A3 Transversal Louver
		TW ⁶ 238 to 290 lm/ft, 3.9W/ft	TW82740⁷ Tunable White 2700K to 4000K, 80CRI	WGM Medium 23°x41°	G Ground Spike in Soil with Arm	4 Black Adjustable Arms 2 3/4" (71mm)		F5 Rust Brown	A4 Longitudinal Louver
				WGMF Wide Flood 27°x60°		5 Steel Adjustable Arms 2 3/4" (71mm)			A5 Honeycomb Louver
				WG No-Dot 21°x80°		6 Black Adjustable Arms 4 3/4" (121mm)			A6 Visor + Transversal Louver
				ELLIPTICAL ELL⁵ Elliptical 22°x60°		7 Steel Adjustable Arms 4 3/4" (121mm)			A7 Linear Prismatic Screen
						8 Black Adjustable Arms 8 3/4" (221mm)			A8 Protective Frame (For Ik10)
						9 Steel Adjustable Arms 8 3/4" (221mm)			
						10³ Black Single Adjustable Arm 4 3/4" (121mm) For 1ft Module Only			
						11³ Stainless Steel Single Adjustable Arm 4 3/4" (121mm) For 1ft Module Only			

¹ Length 6' and more are module composition in continuous row. See [page 7](#) for details.² For Surface flat without arm mounting only (S1).³ Available for mounting G, 1ft module only.⁴ Consult [page 2](#) or Instruction sheet to see optic/accessory recommendations.⁵ Optics not recommended for wall lighting.⁶ For 3.9W/ft max length per feed is 20ft, for 4.5W/ft max length per feed is 13ft and for 5W/ft max length per feed is 11ft.⁷ Available with wall grazer spot, medium and wide flood optics only (WGS, WGM, WGMF).

DRIVER CODE

EXAMPLE: 4449-0024A-060-UNV-ND

DRIVER

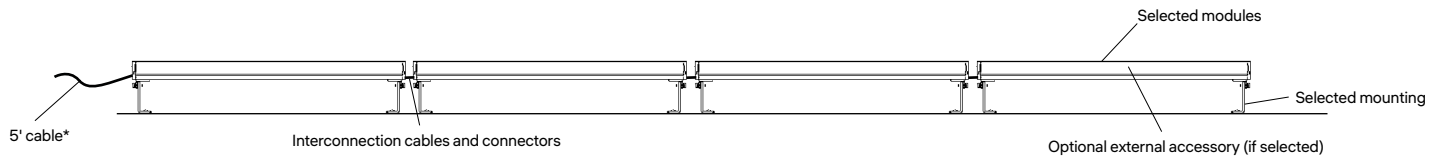
Driver options are available on [page 4](#).

CONNECTION ACCESSORY CODE EXAMPLE: IX720

CONNECTION ACCESSORIES

More information available on [page 3](#).

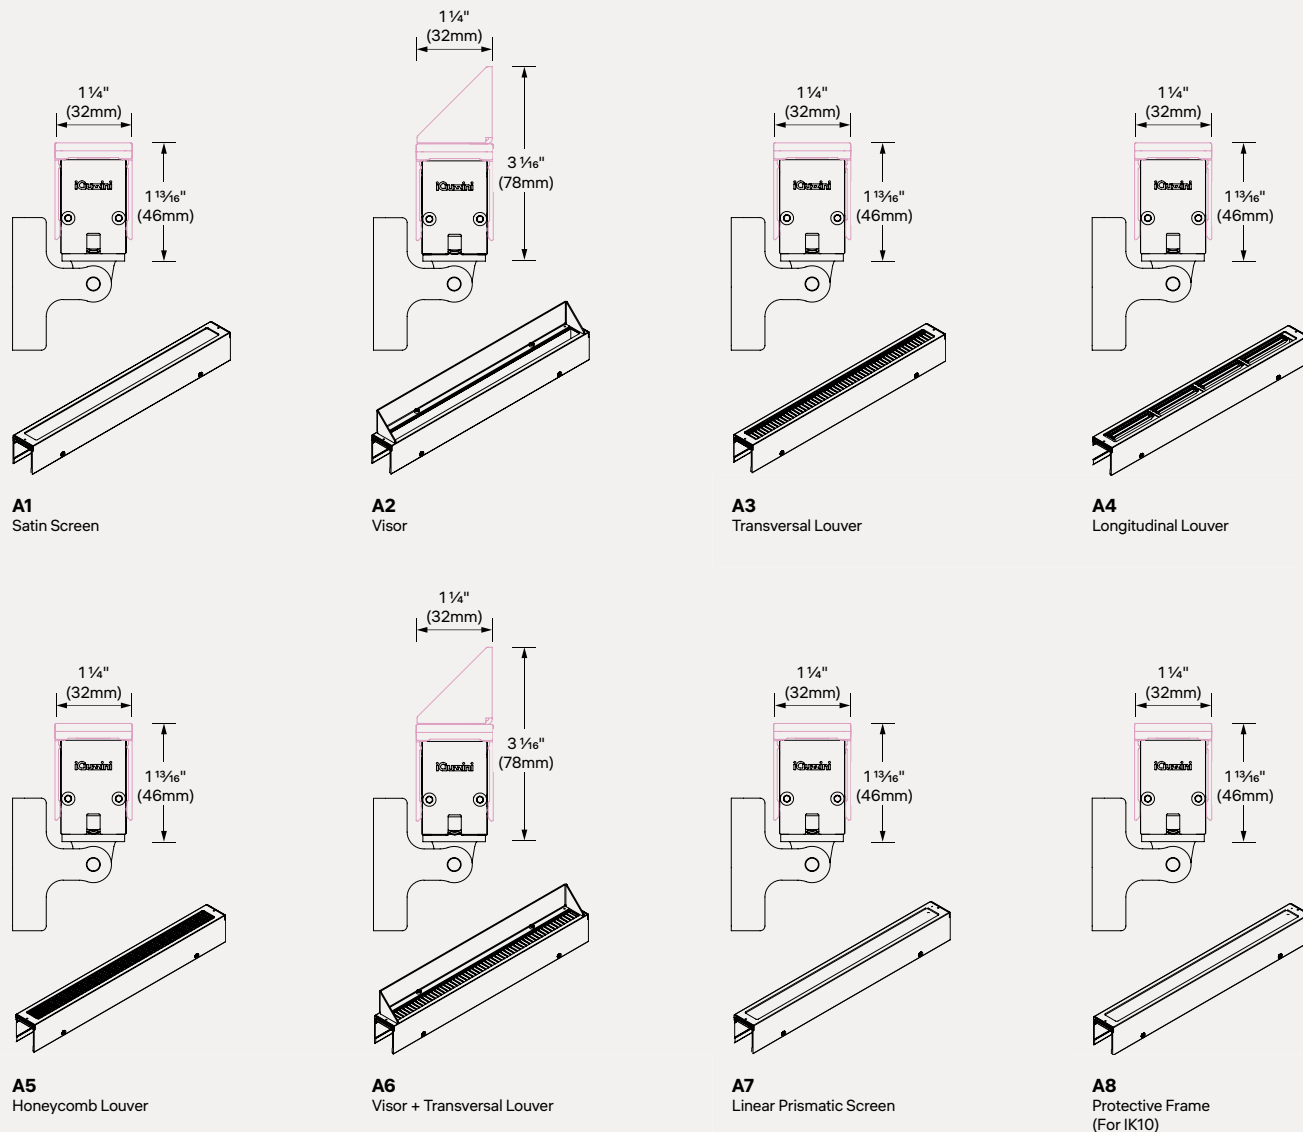
VL-R0 | Last Update : October 6, 2025

LINEALUCE 27**Surface Remote - RGBW & Tunable White**
 Project: _____
 Type: _____
INCLUDED IN PRODUCT CODE

* For 1 to 5ft module, 1 cable X169 (femelle) included. For 6 to 20ft compositions, 1 cable X169 (femelle) and 1 cable X173 (male) included.

ACCESSORIES

Consult instruction sheet for limitations and detail on installation.
 All optical accessories must be assembled to the product before installation.

OPTIONAL OPTICAL ACCESSORIES**EXTERNAL ACCESSORIES**

LINEALUCE 27

Surface Remote - RGBW & Tunable White

Project:

Type:

CONNECTION ACCESSORIES

To be ordered separately.
For installation, consult instruction sheet.

CONNECTION ACCESSORIES CODE

EXAMPLE: IX720

JUNCTION BOX	WATERPROOF IP68 FIELD CONNECTOR					
 4543-00 Wet location junction box Includes 3 cable clamp for ø3/16 to 7/16in cable and 1 plug. Color Aluminium unfinished	 Cable with male/female connector. 24AWG Color Black Thickness ø0.15in		 Cable with female connector. 24AWG Color Black Thickness ø0.15in		 Cable with male connector. 24AWG Color Black Thickness ø0.15in	
	RGBW	TUNABLE WHITE	RGBW	TUNABLE WHITE	RGBW	TUNABLE WHITE
	IX751 2ft (600mm)	IX720 2ft (600mm)	IX714 1ft (350mm)	IX774 1ft (350mm)	IX719 5ft (1500mm)	IX293 5ft (1500mm)
	IX752 5ft (1500mm)	IX721 5ft (1500mm)	IX715 5ft (1500mm)	IX289 5ft (1500mm)		
			IX716 10ft (3000mm)	IX290 10ft (3000mm)		
			IX717 16ft (5000mm)	IX291 16ft (5000mm)		

LINEALUCE 27**Surface Remote - RGBW & Tunable White**



Project: _____

Type: _____

REMOTE LED DRIVER OPTIONS**DRIVER CODE**

EXAMPLE: 4449-0024A-060-UNV-ND

INDOOR RATED DRIVER BOX MODELS	MIN-MAX		
	RGBW SP, WGS, WGM, WGW, ELL (4.5W/ft)	RGBW NO-DOT GL, WG (5W/ft)	TUNABLE WHITE (3.9W/ft)
4449-0024A-060-UNV-ND	Up to 13ft Linealuce module per feed	Up to 11ft Linealuce module per feed	Up to 15ft Linealuce module per feed
4449-0024A-060-UNV-DA			
4449-0024A-060-UNV-LDMX			
4449-0024A-096-UNV-ND	21ft (13ft of Linealuce module per feed)	19ft (11ft of Linealuce module per feed)	24ft (20ft of Linealuce module per feed)
4449-0024A-096-UNV-DA			
4449-0024A-096-UNV-LDMX			
4446-0024A-120-UNV-ND	26ft (13ft of Linealuce module per feed)	24ft (11ft of Linealuce module per feed)	30ft (20ft of Linealuce module per feed)
4446-0024A-192-UNV-ND	42ft (13ft of Linealuce module per feed)	38ft (11ft of Linealuce module per feed)	49ft (20ft of Linealuce module per feed)

DRIVER BOX DIMENSIONS**INDOOR RATED****OUTDOOR RATED**

OUTDOOR RATED DRIVER BOX MODELS	MIN-MAX		
	RGBW SP, WGS, WGM, WGW, ELL (4.5W/ft)	RGBW NO-DOT GL, WG (5W/ft)	TUNABLE WHITE (3.9W/ft)
4549-0024A-060-UNV-ND	Up to 13ft Linealuce module per feed	Up to 11ft Linealuce module per feed	Up to 15ft Linealuce module per feed
4555-0024A-060-UNV-DA			
4555-0024A-060-UNV-LDMX			
4549-0024A-096-UNV-ND	21ft (13ft of Linealuce module per feed)	19ft (11ft of Linealuce module per feed)	24ft (20ft of Linealuce module per feed)
4555-0024A-096-UNV-DA			
4555-0024A-096-UNV-LDMX			

DRIVER BOX MODEL DESCRIPTION

MODEL (L x W x H)	OUTPUT VOLTAGE	WATTAGE	INPUT VOLTAGE	DIMMING PROTOCOL
4446 16" x 12" x 4" (406 x 305 x 101mm)	0024A 24 Vdc adjustable from 22 to 27Vdc via a built in potentiometer	060 to 192 60W to 192W	UNV 120-277V	ND On/off Max Distance 16ft (5m) ¹
4449 12" x 8" x 4" (305 x 203 x 101mm)				DA DALI (module capacity 720W) Dimming Range Down to 0.1% Max Distance 16ft (5m) ¹
4549 14.5" x 5" x 3.5" (368 x 127 x 89mm)				LDMX DMX (module capacity 720W) Dimming Range Down to 0.1% Max Distance 16ft (5m) ¹
4555 13" x 9" x 4.5" (330 x 228 x 114mm)				

¹ Calculated for 24 AWG cable on a 13ft, 11ft or 20ft line with Vstart 25V. With bigger gauge from remote driver to relay wet location junction box, you can achieve longer distance. Consult installation sheet or contact factory for longer remote distance. See wiring diagram [page 5](#).

VL-R0 | Last Update : October 6, 2025

LINEALUCE 27**Surface Remote - RGBW & Tunable White**

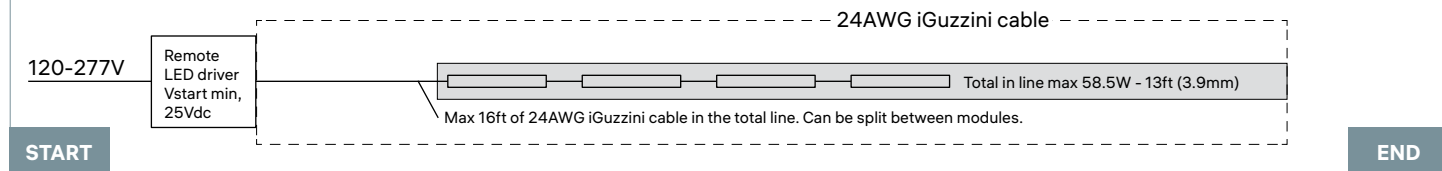
Project: _____

Type: _____

SUGGESTED WIRING DIAGRAM FOR RGBW**LED DRIVER CODE : 4XXX-0024A-060-UNV-LDMX/DA**

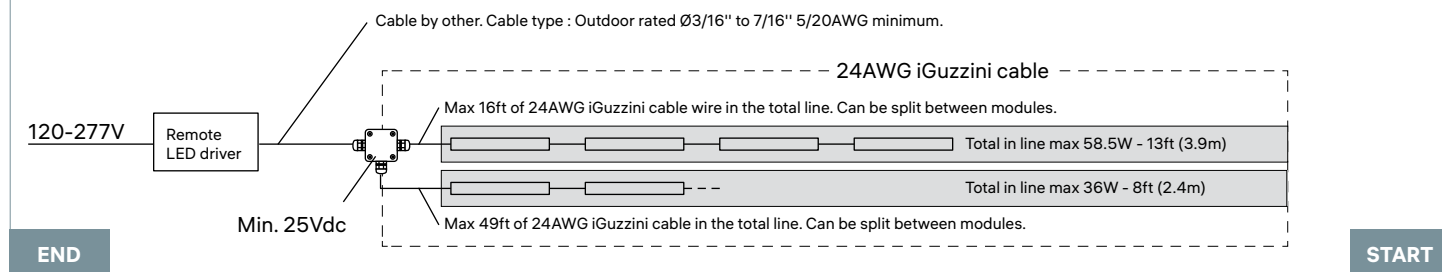
Wmax for in line with 4.5W/ft: 58.5W - 13ft (3.9m)

Wmax for driver box: 60W

**LED DRIVER CODE : 4XXX-0024A-096-UNV-LDMX/DA**

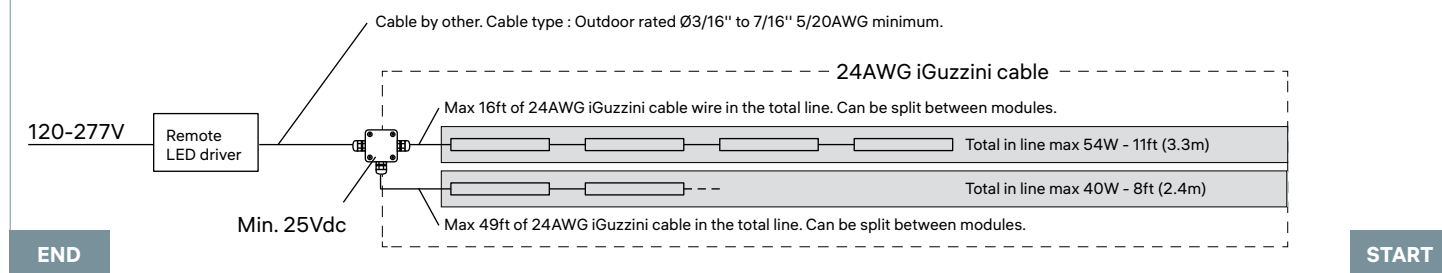
Wmax for in line with 4.5W/ft: 58.5W - 13ft (3.9m)

Wmax for driver box: 96W

**SUGGESTED WIRING DIAGRAM FOR RGBW NO-DOT****LED DRIVER CODE : 4XXX-0024A-096-UNV-LDMX/DA**

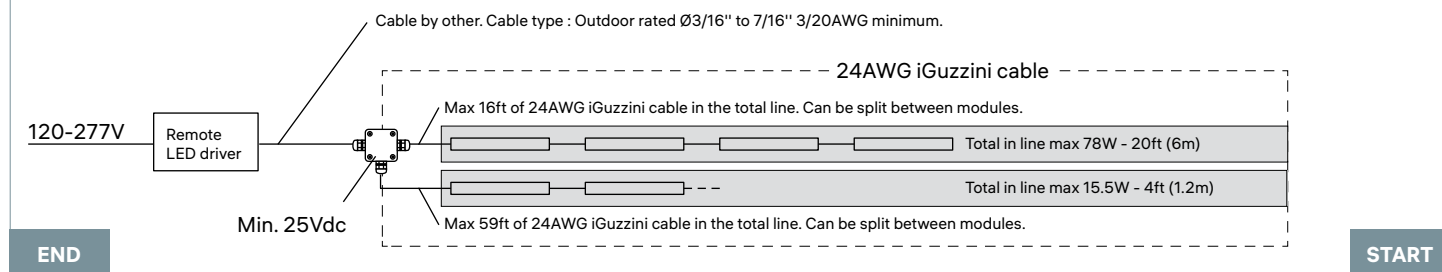
Wmax for in line with 5W/ft: 54W - 11ft (3.3m)

Wmax for driver box: 96W

**SUGGESTED WIRING DIAGRAM FOR TUNABLE WHITE****LED DRIVER CODE : 4XXX-0024A-096-UNV-LDMX/DA**

Wmax for in line with 3.9W/ft: 78W - 20ft (6m)

Wmax for driver box: 96W



LINEALUCE 27**Surface Remote - RGBW & Tunable White**

Project: _____

Type: _____

SPECIFICATIONS**SOURCE**

RGBW, white LED: 3000K, 80CRI
 RGBW, white LED: 3500K, 80CRI
 Tunable white 2200K to 3000K, 80 CRI
 Tunable white 2700K to 4000K, 80 CRI

LUMEN MAINTENANCE**For RGBW:**

80% of initial lumens at 100 000 hours (L80 B10)
 Ta 77°F and 104°F (25°C and 40°C) (LM-80)

Tunable White:

85% of initial lumens at 100 000 hours (L85 B10)
 Ta 77°F and 104°F (25°C and 40°C) (LM-80)

OPTICS

Symmetrical Optics: Spot or General Light.

Wall Grazer Optics: Spot, Medium, Wide Flood or No-dot.

Elliptical Optic: 22°x60°.

MATERIAL

Body: Extruded aluminum

End Caps: Die-cast aluminum silicone seals.

Protective Screen: ¼" (5mm transparent glass)

Optic Diffuser: PMMA (polymethyl methacrylate)

Hardware: Stainless steel

MOUNTING

Ceiling, floor or wall mounted with fix-flat or arm accessories.
 Ground installation with arms on spike.

ELECTRICAL

24Vdc remote LED driver. See remote option [page 4](#).

DIMMING

DMX-RDM control (120-277V), down to 0.1%

DALI (120-277), down to 0.1%

See dimming options [page 4](#).

OPERATING TEMPERATURE

-22°F to 122°F (-30°C to 50°C)

FINISH

Black (RAL9005), Gray (RAL9007), Rust Brown (RAL8017) and White (RAL9016) painted with a high level of weather and UV resistance. The semi-gloss finish coating is electrostatically applied durable acrylic enamel baked at high temperatures for superior color retentive finish. We provide RAL numbers that are similar, but we cannot guarantee an exact color match. For a more accurate color and gloss match, please contact customer service for a sample chip.

WEIGHT

0.99lb/ft (0.45kg/ft)

WARRANTY

5 year limited warranty.

RATINGS

IP66, IK06


CERTIFICATION

cULus listed for wet location


**LENGTHS**

Except for 1ft units, all units are equipped with 2 connectors (male/female) for through wiring.
 1ft units are equipped with 1 male connector.


01 L = 1.08'




02 L = 2.05'






03 L = 3.02'



04 L = 3.99'




05 L = 4.96'

**OPTICS OVERVIEW****SYMMETRICAL**

Spot
(10°x10°)



General Light No-Dot
(45°x82°)

GRAZER

Wall Grazer Spot
(14°x14°)




Wall Grazer Medium
(23°x41°)



Wall Grazer Wide Flood
(27°x60°)



Grazer No-Dot
(21°x80°)

ELLIPTICAL

Elliptical
(22°x60°)

LINEALUCE 27**Surface Remote - RGBW & Tunable White**

Project: _____

Type: _____

CONTINUOUS ROWS EXAMPLES


Single elements can be combined to obtain dark spot free continuous row with a single feed point.
Note that 1/16" (2mm) spacing minimum is required for continuous rows installation and is included in the dimensions below and in the ordering info.

10 L = 9.92'



Module combination: 2x1511mm
Total length: 9.92' (3024mm)

16 L = 15.98'

Module combination: 3x1511mm + 1x329mm
Total length: 15.98' (4868mm)

20 L = 19.84'

Module combination: 4x1511mm
Total length: 19.84' (6050mm)

**MODULE SPACING*****PLUG AND PLAY
QUICK CONNECTOR
INSTALLATION**



LINEALUCE 27**Surface Remote - RGBW & Tunable White**

Project: _____

Type: _____

MOUNTING AND DIMENSIONS



Consult instruction sheet for detail on installation.
Need a width clearance of 2 5/8" (67mm) to install.

S1 - SURFACE FLAT-FIX INSTALLATION FOR HEIGHTS BELOW 9.5FT (3M)

S1
Plate for flat surface mounting
for Linealuce 27 1ft module (L=329mm)

X760 Plate for flat surface mounting



**Need a width clearance
of 2 5/8" (67mm) to install.**



S1
Plate for flat surface mounting
for Linealuce 27 2ft and 3ft module
(L=628 and 920mm)

X693 Plate for flat surface mounting

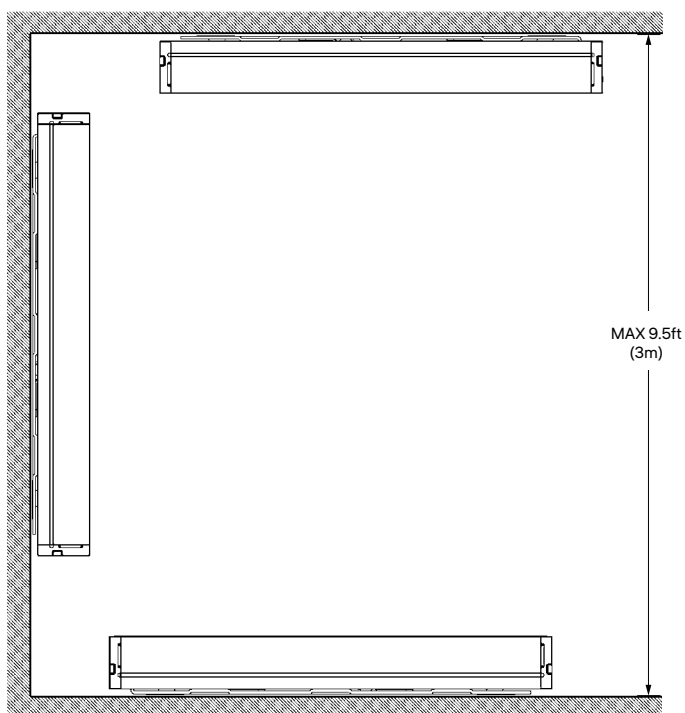
**Need a width clearance
of 2 5/8" (67mm) to install.**




S1
Plate for flat surface mounting
for Linealuce 27 4ft and 5ft module
(L=1216 and 1511mm).

X694 Plate for flat surface mounting

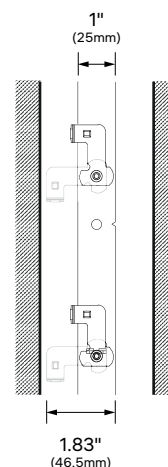
**Need a width clearance
of 2 5/8" (67mm) to install.**

PERMITTED INSTALLATION POSITION**MINIMUM WIDTH CLEARANCE**

Need minimum width clearance
of 2 5/8" (67mm) to install.



Dimension when tabs are opened





LINEALUCE 27**Surface Remote - RGBW & Tunable White**

Project: _____
 Type: _____

MOUNTING AND DIMENSIONS


Consult instruction sheet for limitations and detail on installation.

M - ARM INSTALLATION FOR HEIGHTS BELOW 9.5FT (3M)

M2-M3
Adjustable arms

Length 1 5/8" (41mm)

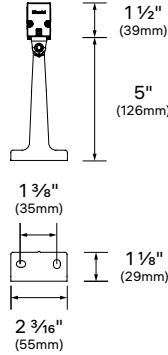
A- X688 pair of adjustable arms.
 B- X747 intermediate arm.



M4-M5
Adjustable arms

Length 2 3/4" (71mm)

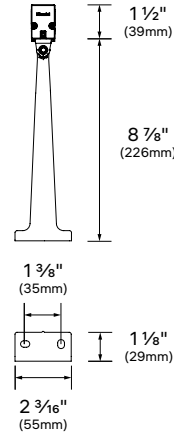
A- X689 pair of adjustable arms.
 B- X748 intermediate arm.



M6-M7
Adjustable arms

Length 4 3/4" (121mm)


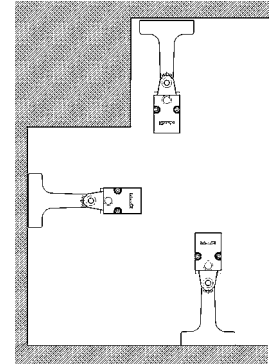


A- X690 pair of adjustable arms.
 B- X749 intermediate arm.



M8-M9
Adjustable arms

Length 8 3/4" (221mm)


A- X691 pair of adjustable arms.
 B- X750 intermediate arm.

PERMITTED**INSTALLATION POSITION****U - ARM INSTALLATION FOR HEIGHTS GREATER THAN 9.5FT (3M)**

U2-U3
Adjustable arms

Length 1 5/8" (41mm)
Weight 0.44lb (0.20kg)
EPA 0.022ft² (0.002m²)

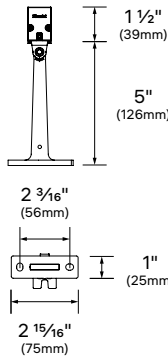
A- X688 pair of reinforced adjustable arms.



U4-U5
Adjustable arms

Length 2 3/4" (71mm)
Weight 0.68lb (0.31kg)
EPA 0.022ft² (0.002m²)

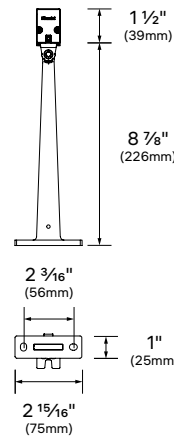
A- X770 pair of reinforced adjustable arms.



U6-U7
Adjustable arms

Length 4 3/4" (121mm)
Weight 0.88lb (0.40kg)
EPA 0.032ft² (0.003m²)

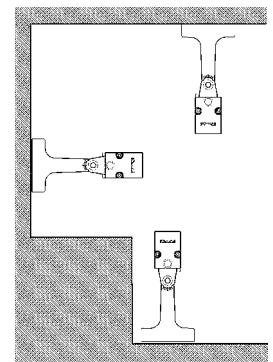
A- X771 pair of reinforced adjustable arms.



U8-U9
Adjustable arms

Length 8 3/4" (221mm)
Weight 1.34lb (0.61kg)
EPA 0.075ft² (0.007m²)

A- X772 pair of reinforced adjustable arms.

PERMITTED**INSTALLATION POSITION**

MODULE LENGTH	EPA*
01 L = 1.08' (329mm)	0.33ft² (0.031m²)
02 L = 2.05' (625mm)	0.64ft² (0.059m²)
03 L = 3.02' (920mm)	0.95ft² (0.088m²)
04 L = 3.99' (1216mm)	1.25ft² (0.116m²)
05 L = 4.96' (1511mm)	1.56ft² (0.145m²)

* Calculated with visor accessory. To have the total EPA, add all the value EPA items in composition. Consult page 9 for other length composition.

LINEALUCE 27**Surface Remote - RGBW & Tunable White**

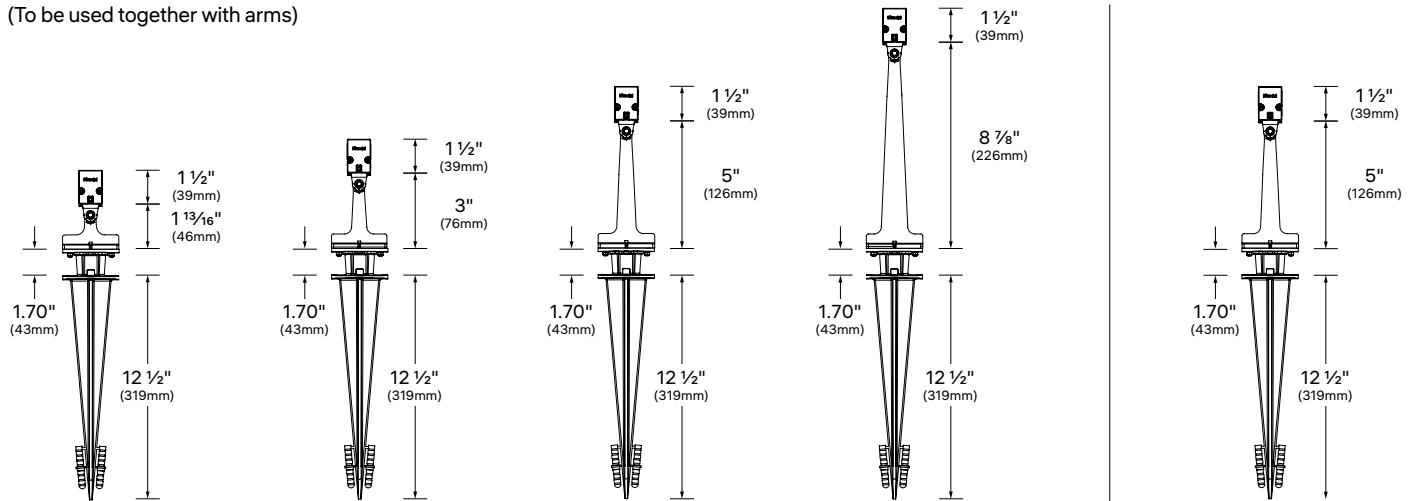
Project: _____
 Type: _____

MOUNTING AND DIMENSIONS

Consult instruction sheet for limitations and detail on installation.

SPIKE IN SOIL WITH PIVOT ARM

(To be used together with arms)

**G2-G3**

Pair of spikes and pair of adjustable arms

Length 1 5/8" (41mm)

A- X688 pair of adjustable arms.
 B- X747 intermediate arm.
 C- X476 pair of spike for ground.
 D- X271 single spike for ground

G4-G5

Pair of spikes and pair of adjustable arms

Length 2 3/4" (71mm)

A- X689 pair of adjustable arms.
 B- X748 intermediate arm.
 C- X476 pair of spike for ground.
 D- X271 single spike for ground.

G6-G7

Pair of spikes and pair of adjustable arms

Length 4 3/4" (121mm)

A- X690 pair of adjustable arms.
 B- X749 intermediate arm.
 C- X476 pair of spike for ground.
 D- X271 single spike for ground.

G8-G9

Pair of spikes and pair of adjustable arms

Length 8 3/4" (221mm)

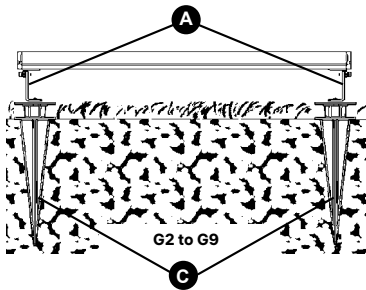
A- X691 pair of adjustable arms.
 B- X750 intermediate arm.
 C- X476 pair of spike for ground.
 D- X271 single spike for ground.

G10-G11

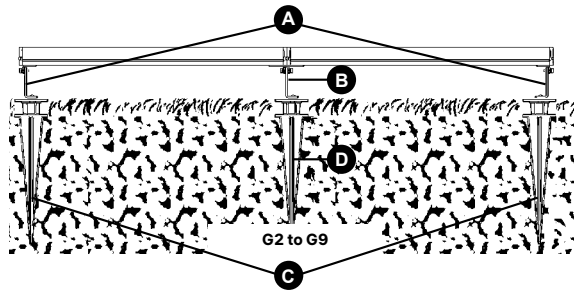
Spike with plate support arm (only for 1ft (329mm) module)

Length 4 3/4" (121mm)


A- X392 plate with adjustable arm.
 B- X271 single spike for ground.

PERMITTED INSTALLATION POSITION

Layout type for 1ft to 5 ft module.



Layout type for 6ft to 20ft length.



Layout type for 1ft module.



LINEALUCE 27

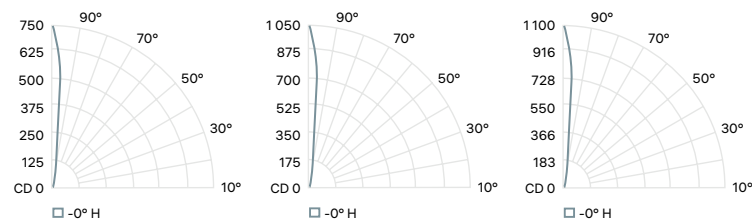
Surface Remote - RGBW & Tunable White

SPECIFICATION SHEET | 11 of 13

Project: _____
Type: _____

PHOTOMETRIC DATA

SYMMETRICAL OPTICS	MODEL	CCT (K)	CRI	POWER (W/ft)	LUMENS (lm/ft)	EFFICACY (lm/W)	MAX CANDELA (cd)
Spot - 10°×10° 	RGBW	3000	80	4.5	260	65	1 403
	RGBW	3500	80	4.5	TBC	TBC	TBC
			Spot RGBW (3000K, 80CRI) 				
General Light No-Dot - 45°×82° 	RGBW	3000	80	5	112	24	97
	RGBW	3500	80	5	TBC	TBC	TBC
			General Light No-Dot RGBW (3000K, 80CRI) 				








WALL GRAZER OPTICS	MODEL	CCT (K)	CRI	POWER (W/ft)	LUMENS (lm/ft)	EFFICACY (lm/W)	MAX CANDELA (cd)
Wall Grazer Spot - 14°×14° 	RGBW	3000	80	4.5	214	53	728
	RGBW	3500	80	4.5	TBC	TBC	TBC
	TW	2200-3000	80	3.9	270	71	1 015
	TW	2700-4000	80	3.9	290	76	1 091
			WGS RGBW (3000K, 80CRI) WGS TW (2200K-3000K, 80CRI) WGS TW (2700K-4000K, 80CRI) 				

Power can vary with selected drivers. Use the multiplier table for other CCT and CRI output data. Efficacy based on IESNA LM-79 test reports. Visit iguzzini.com/us for complete photometric data.

LINEALUCE 27
Surface Remote - RGBW & Tunable White

Project: _____
 Type: _____

PHOTOMETRIC DATA

WALL GRAZER OPTICS	MODEL	CCT (K)	CRI	POWER (W/ft)	LUMENS (lm/ft)	EFFICACY (lm/W)	MAX CANDELA (cd)
Wall Grazer Medium - 23°×41° 	RGBW	3000	80	4.5	197	49	379
	RGBW	3500	80	4.5	TBC	TBC	TBC
	TW	2200-3000	80	3.9	259	68	505
	TW	2700-4000	80	3.9	279	73	543
				WGM RGBW (3000K, 80CRI)  WGM TW (2200K-3000K, 80CRI)  WGM TW (2700K-4000K, 80CRI) 			
Wall Grazer Wide Flood - 27°×60° 	RGBW	3000	80	4.5	180	45	277
	RGBW	3500	80	4.5	TBC	TBC	TBC
	TW	2200-3000	80	3.9	238	62	377
	TW	2700-4000	80	3.9	256	67	405
				WGWF RGBW (3000K, 80CRI)  WGWF TW (2200K-3000K, 80CRI)  WGWF TW (2700K-4000K, 80CRI) 			
Wall Grazer No-Dot - 21°×80° 	RGBW	3000	80	5	87	17	104
	RGBW	3500	80	5	TBC	TBC	TBC
				Wall grazer no-dot RGBW (3000K, 80CRI) 			

Power can vary with selected drivers. Use the multiplier table for other CCT and CRI output data. Efficacy based on IESNA LM-79 test reports. Visit iguzzini.com/us for complete photometric data.


LINEALUCE 27

Surface Remote - RGBW & Tunable White

Project: _____

Type: _____

PHOTOMETRIC DATA

ELLIPTICAL OPTICS	MODEL	CCT (K)	CRI	POWER (W/ft)	LUMENS (lm/ft)	EFFICACY (lm/W)	MAX CANDELA (cd)
Elliptical - 22°×60° 	RGBW	3000	80	4.5	226	56	401
	RGBW	3500	80	4.5	TBC	TBC	TBC
			ELL RGBW (3000K, 80CRI) 				

Power can vary with selected drivers. Use the multiplier table for other CCT and CRI output data. Efficacy based on IESNA LM-79 test reports. Visit iguzzini.com/us for complete photometric data.