


Collection of wall mounted luminaires for exterior applications. Lift has an innovative optical system that produces pleasing graphic effects. By using a combination of wide flood or narrow spot beams, this luminaire offers limitless possibility of lighting effects.

<b>Luminaire characteristics:</b>	<b>Power input:</b> 18.2W <b>Lumens:</b> 109lm to 202lm (for 3000K, 90CRI) <b>Luminaire efficacy:</b> Up to 10lm/W
<b>Source:</b>	LED module (LM-80 tested) 2700K: 90CRI, 3000K: 90CRI, 4000K: 80CRI.
<b>Lumen maintenance:</b>	80% of initial lumens at 70 000 hours (L80)
<b>Optics:</b>	Narrow spot or wide flood.
<b>Material:</b>	Body: Die-cast aluminum Diffuser: Clear tempered glass Reflector: Aluminum Hardware: Stainless steel screws and silicone gaskets.
<b>Electrical:</b>	Universal high efficiency electronic LED driver rated at 50 000 hours, 120V-277V.
<b>Dimming:</b>	0-10V (120-277V), down to 15%
<b>Mounting:</b>	Install on a standard 4" octagonal junction box.
<b>Finish:</b>	Aluminum gray and black
<b>Weight:</b>	9.25lb (4.2kg).
<b>Warranty:</b>	5 year limited warranty.
<b>Ratings:</b>	IP65, IK06
<b>Certification:</b>	 cULus listed for wet location.

**ORDERING INFO**

**- UNV - - D10**

FIXTURE



**MODEL**

- S5070** - 60° Wide flood       **S5075** - 2° Narrow spot

**LED**

- H** - 2700K, 90CRI       **W** - 3000K, 90CRI       **N** - 4000K, 80CRI

**VOLTAGE**

- UNV** - 120-277V


**FINISH**

- 09** - Black       **14** - Aluminum gray


**DIMMING**

- D10** - 0-10V

**DIMENSIONS**

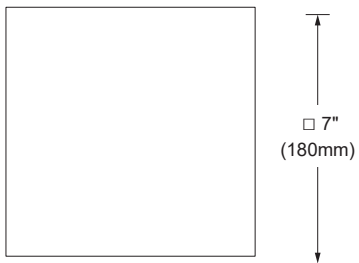

**FRONT VIEW**

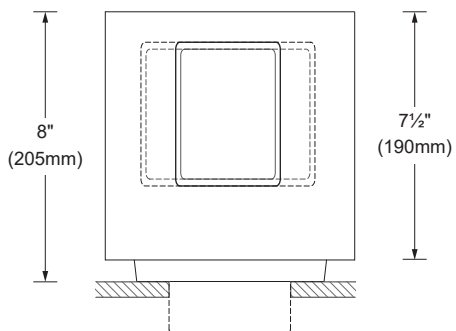


**BOTTOM VIEW**

**PHOTOMETRIC DATA**




Visit [sistimalux.com](http://sistimalux.com) for complete photometric data.

CCT (K)	CRI	LOAD (W)	OPTIC	LUMENS (lm)	EFFICACY (lm / W)	MAX CANDELA (cd)	MODELS
3000K	90	18.2W	Wide flood 60°	202	10	341	S5070W
			Narrow spot 2°	109	5	2566	S5075W

**Narrow spot 2° (3000K, 90CRI)**



**Wide flood 60° (3000K, 90CRI)**

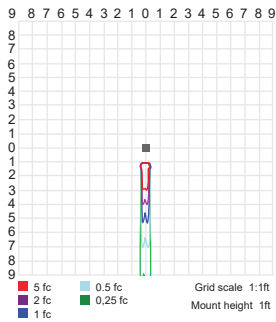

CCT options	2700K	3000K	4000K
CRI options	90CRI	90CRI	80CRI
<b>Multiplier</b>	<b>0.94</b>	<b>1</b>	<b>1.03</b>