

Project name: _____

Type: _____



Ceiling mounted luminaire with excellent light control, characteristics gives improved lighting design solutions and precision with glare-free effects outside the declared angle of light emission.

Luminaire characteristics:

Power input: 2.2W

Lumens: 90 lm

Luminaire efficacy: 40 lm/W

Source: White LED, LM-80 tested.

3000K: 90CRI.

4000K: 90CRI.

Lumen maintenance: >70% of initial lumens at > 50 000 hours (L70), (LM-79 tested).

Optics: 38° beam angle.

Material:

Body: die-cast aluminum.

Reflector: 99.98% pure anodized aluminum.

Diffuser: clear toughened glass.

Hardware: stainless steel screws and silicone gasket.

Electrical: Integral high efficiency electronic power supply, rated at 50 000 hours 120V.

Mounting: Install on a standard 4" Jbox.


Finish: White or aluminum gray.

Weight: 0.9lbs (0.4kg).


Warranty: 5 year limited warranty.

Certification: cULus listed for wet location.

Ratings: IP65, IK06



SIDE VIEW




BOTTOM VIEW

Project name: _____

Type: _____

TECHNICAL DATA

LOAD (W)	CCT (K)	CRI	OPTIC	DELIVERED LUMENS (lm)	LUMINAIRE EFFICACY (lm / w)	CENTER BEAM CANDLE POWER (cd)	MODEL
2.2W	3000K	90	38°	90	40	214	S.6615W

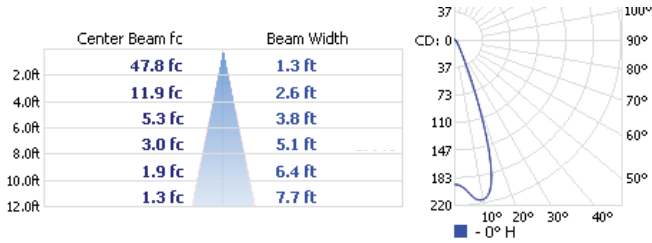

ORDERING INFO

MODEL	VOLTAGE	FINISH
<input type="radio"/> S.6615N - 4000K <input type="radio"/> S.6615W - 3000K	<input type="radio"/> 120 - 120V	<input type="radio"/> 01 - White <input type="radio"/> 14 - Aluminum gray

DUE TO CONTINUOUS IMPROVEMENTS, THE INFORMATION HEREIN MAY BE CHANGED WITHOUT NOTICE.

LAST UPDATE: AUGUST 25, 2016

NA - R1