

Elegant LED profile systems with small aperture, only 1.5". Available in two different sizes for direct / indirect illuminations. Modular continuous systems configured to obtain bespoke solutions by incorporating Laser Blade modules from iGuzzini.

CCT (K)	CRI	MODEL	OPTIC	SYSTEM POWER (W)	LUMENS (lm)	EFFICACY (integral) (lm / W)	MAX CANDELA (cd)
3000	92	5 cells	Spot 13°	13.0	1 016	77	8 581
			Flood 13°	13.0	1 015	77	3 464
			Wide Flood 13°	13.0	1 028	78	1 738
			Wall Washer	13.0	420	32	355
		10 cells	Spot 13°	25.0	2 032	81	17 161
			Flood 13°	25.0	2 032	73	6 927
			Wide Flood 13°	25.0	1 836	93	3 105
			Wall Washer	25.0	840	33	711
		15 cells	Spot 13°	36.5	3 039	83	25 662
			Flood 13°	36.5	3 039	83	10 359
			Wide Flood 13°	36.5	3 076	84	5 200
			Wall Washer	36.5	1 277	33	1 082

N.B.: More optics available

**Source:**

White LED (LM-80)  
2700K: 92CRI (90CRI min),  
3000K: 92CRI (90CRI min),  
3500K: 92CRI (90CRI min),  
4000K: 92CRI (90CRI min).

**Lumen maintenance:**

80% of initial lumens at 50 000 hours (L80) (LM-80).

**Optics:**

Downlight: Spot 13°, flood 32°, wide flood 47°, general light pro, medium oval transversal or longitudinal and wide flood oval transversal or longitudinal;  
General light;  
Wall washer or wall washer LGC.

**Material:**

Profile: Extruded aluminum,  
Body, end caps and Canopy: Die-cast aluminum,  
Cover plate: Extruded aluminum,  
Baffles and reflector: Thermoplastic,  
Wall washer diffuser: PMMA ribbed acrylic.

**Mounting:**

Supplied with 5' (1500mm) long suspension aircraft cable (field adjustable) and white canopy. To be installed on a standard 4" octagonal junction box.

**Electrical:**

Integral high efficiency LED driver, rated at 50 000 hours, 120-277V.

**Dimming:**

Leading edge (TRIAC) and trailing edge (ELV) dimming (120V only), down to 1%.  
0-10V dimming (120-277V), down to 1%.  
Lutron EcoSystem™ (120-277V), down to 1%.

**Finish:**

Powder coated profile, cover plates and white canopy

**Weight:**

ILB05: **H:** 1.222lb (0.55kg) **L:** 1.095b (0.49kg)  
ILB10: **H:** 2.145lb (0.97kg) **L:** 1.948lb (0.88kg)  
ILB15: **H:** 2.974lb (1.35kg) **L:** 2.757lb (1.25kg)

**Warranty:**

5 year limited warranty.

**Ratings:**

IP20

**Certification:**



cULus listed for damp location. Interior use only.



**ORDERING INFO**

- S - F -

FIXTURE

**MODEL**

- 3650** - High - 4 5/8" (116mm)  **3660** - Compact - 3 1/2" (89mm)

**LAYOUT**

- S** - Single

**CONFIGURATION**

- F** - Full

**LASER BLADE MODEL**

- LB05** - 5 Cells  **LB10** - 10 Cells  **LB15** - 15 Cells

**LED**

- 027** - 2700K, 92CRI\*  **030** - 3000K, 92CRI\*  **035** - 3500K, 92CRI\*  **040** - 4000K, 92CRI\*

**OPTIC**

- SP** - Spot 13°  **FL** - Flood 32°  **WF** - Wide flood 47°  **GP** - General light pro  **LM** - Medium oval longitudinal<sup>(1)</sup>  
 **TM** - Medium oval transversal<sup>(1)</sup>  **LW** - Wide flood oval longitudinal<sup>(2)</sup>  **TW** - Wide flood oval transversal<sup>(2)</sup>  **GL** - General light  **WW** - Wall washer  
 **WL** - Wall washer LGC (longitudinal glare control)


**WALL WASHER DIRECTION (FEED POSITION)**

- L** - Left feed<sup>(3)</sup>  **R** - Right feed<sup>(3)</sup>  **N** - Not applicable

**VOLTAGE**

- UNV** - 120-277V  **120** - 120V

**FINISH (profile finish / baffle finish)**

- 10** - Gray / black   **01** - White / black   **02** - Black / black   
 **31** - White / white<sup>(4)</sup> 

**DIMMING**

- D01** - 0-10V (down to 1%)<sup>(5)</sup>  **LTE** - Leading edge and trailing edge (120V only) (down to 1%)  **D2B** - Lutron Hi-Lume® 1% EcoSystem™, <sup>(6)</sup>

**N.B. :** For other dimming solutions please contact customer service.

\* 92CRI typical, minimum 90CRI.

<sup>(1)</sup> Available with five (**LB05**) model.

<sup>(2)</sup> Available with five (**LB05**) and ten (**LB10**) laser blade models.


<sup>(3)</sup> Available for 10 cells (**LB10**) and 15 cells (**LB15**) laser blade models.

<sup>(4)</sup> Available for downlight (**SP**, **FL**, **LM**, **TM**, **LW**, **TW**, **WF**, **GP**) optics.


<sup>(5)</sup> Available with 120-277V (**UNV**) voltage.

<sup>(6)</sup> Not available for fifteen (15) models.


**DIMENSION AND CONFIGURATION**

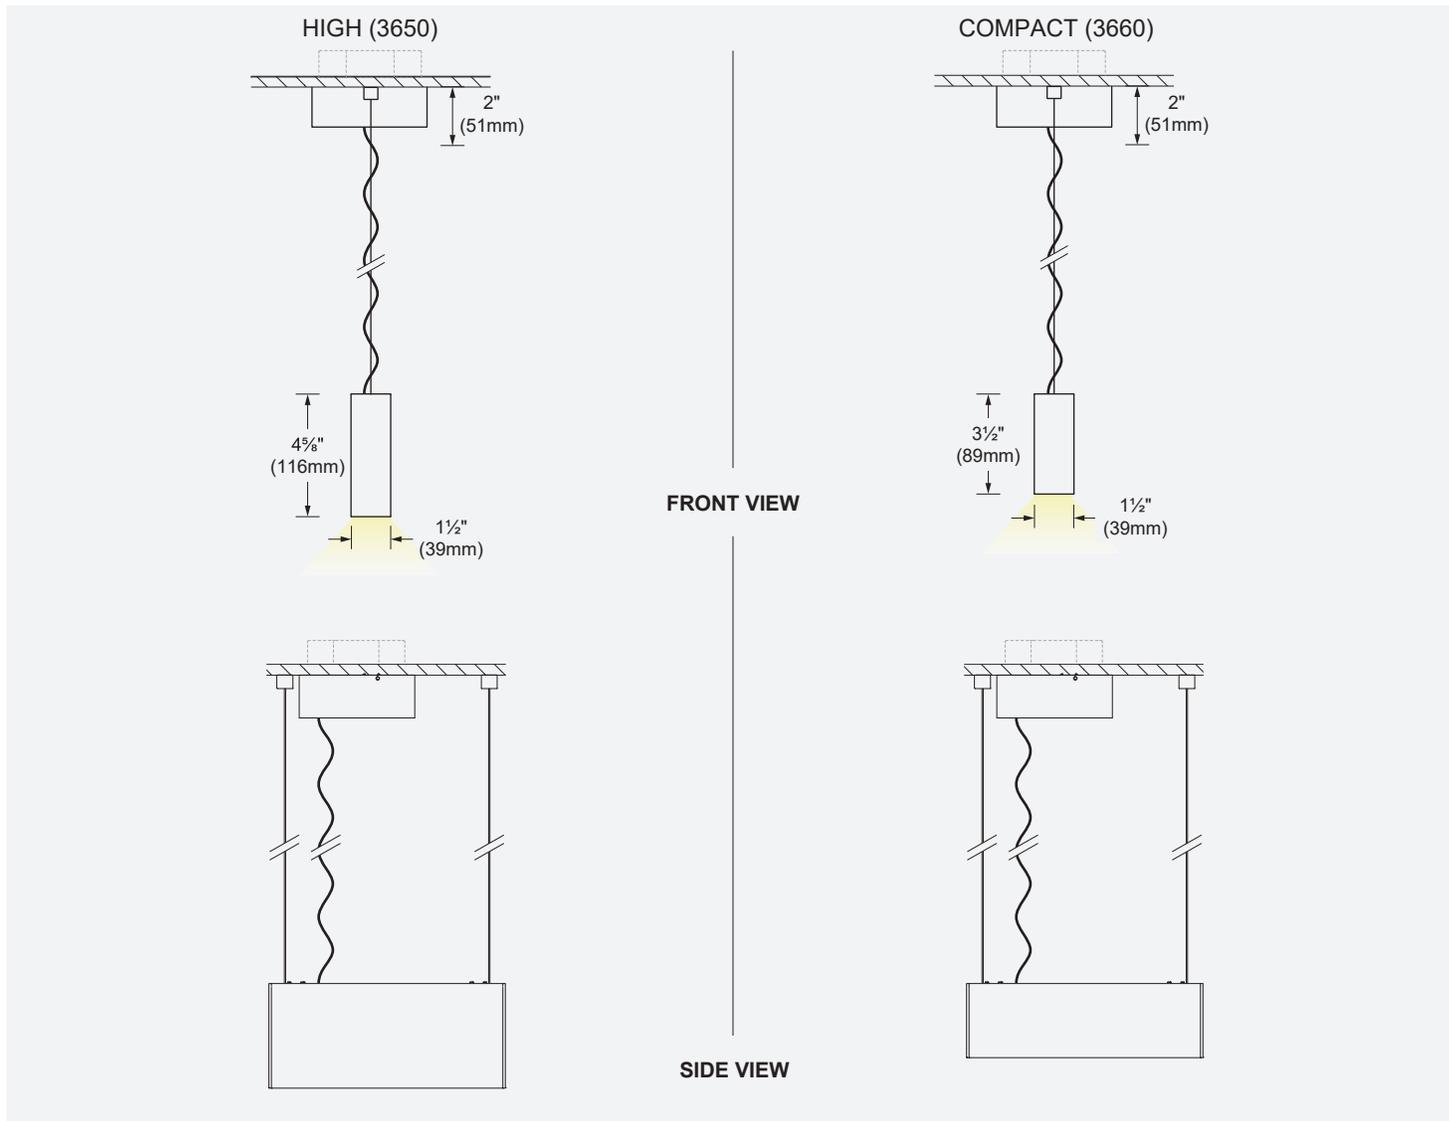


**F - Full configuration**

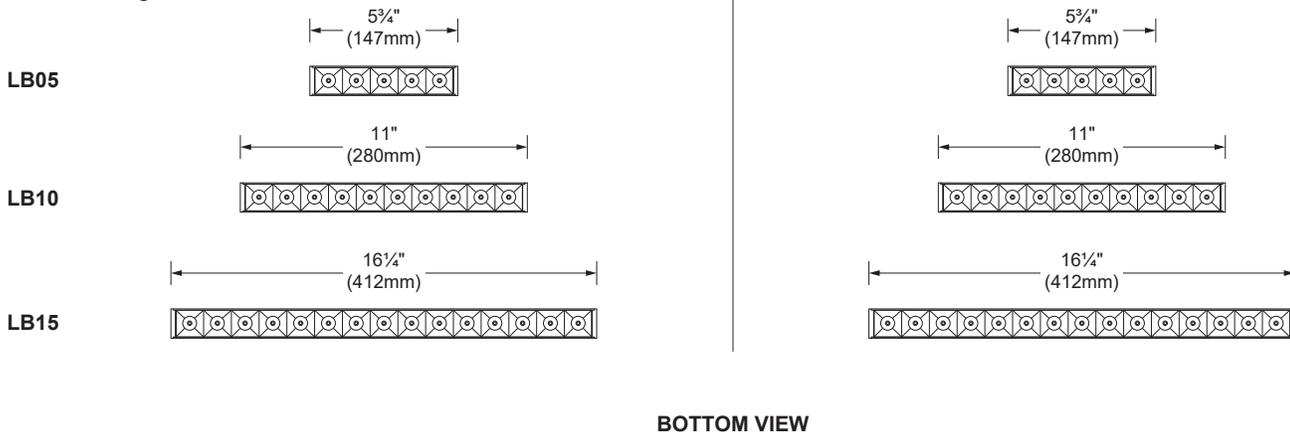

**OVAL BEAM DISTRIBUTION**

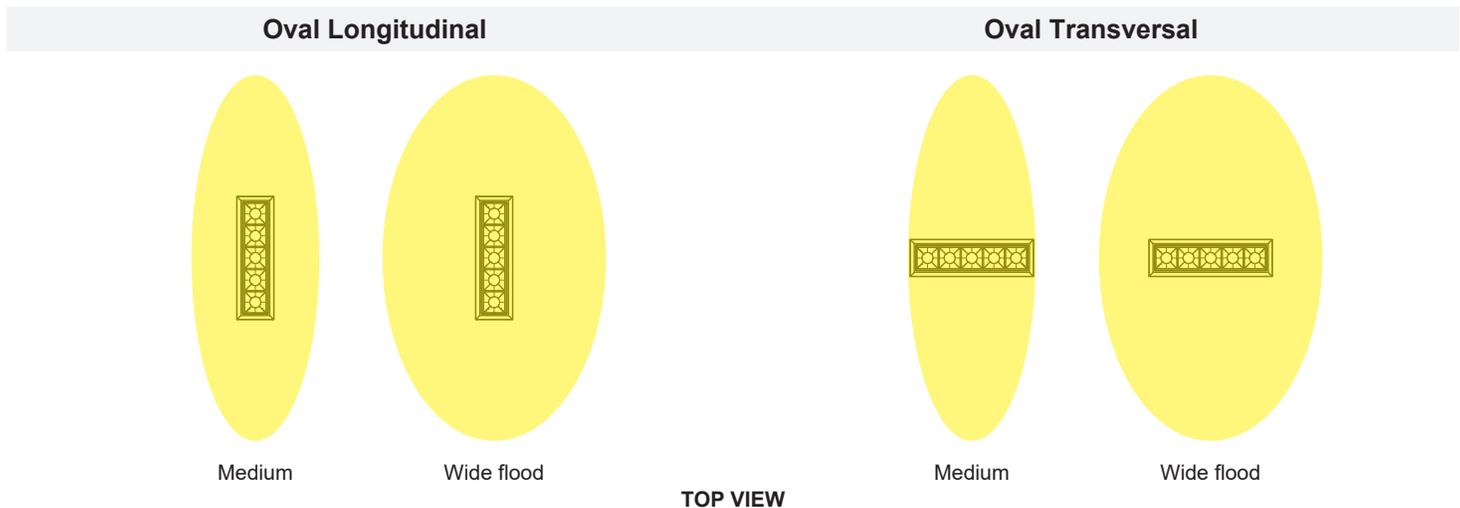


**WALL WASHER DIRECTION (FEED POSITION)**

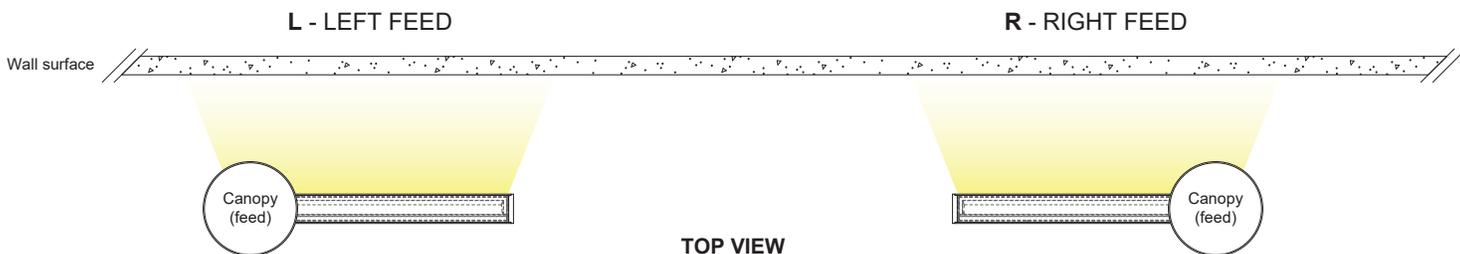

**INSTALLATION (INCLUDED)**

**INTEGRAL DRIVER**

The power supply is located in the 2" (51mm) thick canopy.



**MOUNTING ACCESSORIES (TO BE ORDERED SEPARATELY)**

- 3637** - Accessory for T-Bar Mounting (White) 1 Kit includes 2 anchors \*for installation consult the instruction sheet





Length	# of kits needed
Up to 8'	1
8' to 24'	2
25' to 40'	3
41' to 56'	4
57' to 72'	5
73' to 88'	6
89' to 96'	7

**LED COLOR FIDELITY DATA**

CRI	CCT	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15	Rf	Rg	Melanopic ratio
92	2700K	92	96	98	91	91	95	91	79	55	89	92	86	93	98	88	91	100	0.488
	3000K	93	97	98	92	93	95	92	82	60	91	92	82	94	99	90	92	99	0.571
	3500K	92	95	96	92	91	93	93	83	59	87	92	79	93	97	89	92	99	0.635
	4000K	93	94	94	93	92	91	94	86	64	85	93	78	93	96	90	91	100	0.715

1 This data may be subjected to change.

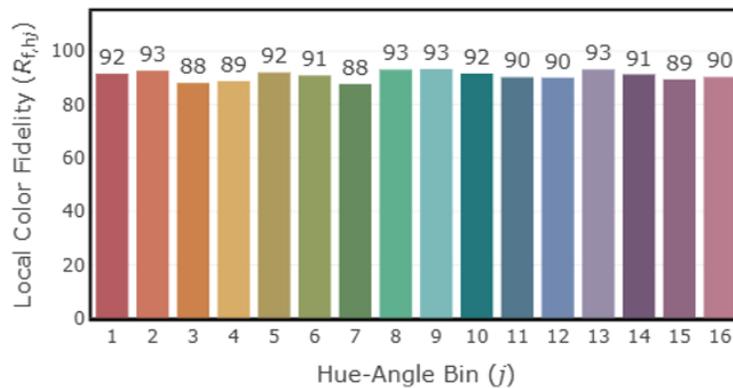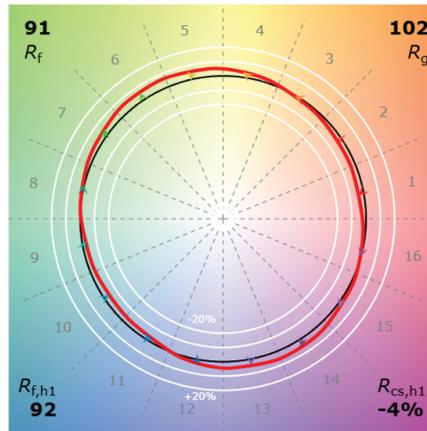


**PHOTOMETRIC DATA**

ILB05



(3000K, 92CRI) • Spot 13°

(ILB05-030-SP)




Center beam fc	Beam width ft	
2ft	1 915	0.5
4ft	479	0.9
6ft	213	1.4
8ft	120	1.9
10ft	76.6	2.3
12ft	53.2	2.8

**Power:** 13.0W  
**Lumens:** 1,016 lm  
**Efficacy:** 77 lm/W  
**Max candela:** 8,581 cd

Photometric data multiplier	
Color temperature	Lumens (lm)
2700K	0.93
<b>3000K</b>	1.00
3500K	1.03
4000K	1.03

(3000K, 92CRI) • Flood 32°

(ILB05-030-FL)




Center beam fc	Beam width ft	
2ft	773	1.2
4ft	193	2.3
6ft	85.9	3.5
8ft	48.3	4.6
10ft	30.9	5.8
12ft	21.5	6.9

**Power:** 13.0W  
**Lumens:** 1,015 lm  
**Efficacy:** 77 lm/W  
**Max candela:** 3,464 cd

Photometric data multiplier	
Color temperature	Lumens (lm)
2700K	0.93
<b>3000K</b>	1.00
3500K	1.03
4000K	1.03

(3000K, 92CRI) • Wide Flood 47°

(ILB05-030-WF)




Center beam fc	Beam width ft	
2ft	376	1.7 1.8
4ft	94	3.4 3.7
6ft	41.8	5.2 5.5
8ft	23.5	6.9 7.4
10ft	15.0	8.6 9.2
12ft	10.4	10.3 11.1

**Power:** 13.0W  
**Lumens:** 1,028 lm  
**Efficacy:** 78 lm/W  
**Max candela:** 1,738 cd

Photometric data multiplier	
Color temperature	Lumens (lm)
2700K	0.93
<b>3000K</b>	1.00
3500K	1.03
4000K	1.03

(3000K, 92CRI) • General Light

(ILB05-030-GL)




Center beam fc	Beam width ft	
2ft	128	2.0 2.9
4ft	31.9	4.0 5.7
6ft	14.2	6.0 8.6
8ft	7.98	8.0 11.4
10ft	5.11	10.0 14.3
12ft	3.55	12.0 17.2

**Power:** 13.0W  
**Lumens:** 620 lm  
**Efficacy:** 49 lm/W  
**Max candela:** 511 cd


Photometric data multiplier	
Color temperature	Lumens (lm)
2700K	0.98
<b>3000K</b>	1.00
3500K	1.03
4000K	1.09

ILB05



(3000K, 92CRI) • General Light Pro

(ILB05-030-GP)




Center beam fc	Beam width ft	
2ft	274	1.9
4ft	68.4	3.8
6ft	30.4	5.7
8ft	17.1	7.5
10ft	11	9.4
12ft	7.60	11.3

**Power:** 13.0W  
**Lumens:** 919 lm  
**Efficacy:** 70 lm/W  
**Max candela:** 1,226 cd

Photometric data multiplier	
Color temperature	Lumens (lm)
2700K	0.93
<b>3000K</b>	1.00
3500K	1.03
4000K	1.03

(3000K, 92CRI) • Wall Washer

(ILB05-030-WW)



Center beam fc	Beam width ft	
2ft	70.1	1.8 2.3
4ft	17.5	3.6 4.6
6ft	7.79	5.4 6.8
8ft	4.38	7.2 9.1
10ft	2.80	9.0 11.4
12ft	1.95	10.8 13.7


**Power:** 13.0W  
**Lumens:** 420 lm  
**Efficacy:** 32 lm/W  
**Max candela:** 355 cd

Photometric data multiplier	
Color temperature	Lumens (lm)
2700K	0.92
<b>3000K</b>	1.00
3500K	1.04
4000K	1.04

**PHOTOMETRIC DATA**

**(3000K, 92CRI) • Wall Washer LGC**

**(ILB05-030-WL)**




Center beam fc	Beam width ft
2ft 57.8	1.9 1.8
4ft 14.5	3.8 3.7
6ft 6.43	5.7 5.5
8ft 3.61	7.6 7.4
10ft 2.31	9.4 9.2
12ft 1.61	11.3 11.1

**Power:** 13.0W  
**Lumens:** 324 lm  
**Efficacy:** 24 lm/W  
**Max candela:** 329 cd

Photometric data multiplier	
Color temperature	Lumens (lm)
2700K	0.92
<b>3000K</b>	1.00
3500K	1.04
4000K	1.04

**(3000K, 92CRI) • Medium Oval Longitudinal**

**(ILB05-030-LM)**




Center beam fc	Beam width ft
2ft 327	0.8 3.0
4ft 81.8	1.6 6
6ft 36.4	2.4 9.1
8ft 20.5	3.2 12.2
10ft 13.1	4.0 15.2
12ft 9.09	4.8 18.3

**Power:** 13.0W  
**Lumens:** 907 lm  
**Efficacy:** 69 lm/W  
**Max candela:** 1,512 cd

Photometric data multiplier	
Color temperature	Lumens (lm)
2700K	0.93
<b>3000K</b>	1.00
3500K	1.03
4000K	1.03

**(3000K, 92CRI) • Medium Oval Transversal**

**(ILB05-030-TM)**




Center beam fc	Beam width ft
2ft 297	3.1 0.8
4ft 74.3	1.6 1.6
6ft 33.0	9.2 2.4
8ft 18.6	12.3 3.3
10ft 11.9	15.3 4.1
12ft 8.26	18.4 4.9

**Power:** 13.0W  
**Lumens:** 883 lm  
**Efficacy:** 67 lm/W  
**Max candela:** 1,406 cd

Photometric data multiplier	
Color temperature	Lumens (lm)
2700K	0.93
<b>3000K</b>	1.00
3500K	1.03
4000K	1.03

**(3000K, 92CRI) • Wide Flood Oval Longitudinal**

**(ILB05-030-LW)**




Center beam fc	Beam width ft
2ft 191	1.5 3.6
4ft 47.8	3.1 7.2
6ft 21.2	4.6 10.8
8ft 11.9	6.2 14.4
10ft 7.64	7.7 18.0
12ft 5.31	9.2 21.6

**Power:** 13.0W  
**Lumens:** 907 lm  
**Efficacy:** 69 lm/W  
**Max candela:** 864 cd

Photometric data multiplier	
Color temperature	Lumens (lm)
2700K	0.98
<b>3000K</b>	1.00
3500K	1.03
4000K	1.03

**(3000K, 92CRI) • Wide Flood Oval Transversal**

**(ILB05-030-TW)**



Center beam fc	Beam width ft
2ft 187	3.6 1.5
4ft 46.8	7.1 3.1
6ft 20.8	10.7 4.6
8ft 11.7	14.3 6.1
10ft 7.49	17.9 7.6
12ft 5.20	21.4 19.2

**Power:** 13.0W  
**Lumens:** 907 lm  
**Efficacy:** 69 lm/W  
**Max candela:** 856 cd

Photometric data multiplier	
Color temperature	Lumens (lm)
2700K	0.98
<b>3000K</b>	1.00
3500K	1.03
4000K	1.03


**PHOTOMETRIC DATA**

**ILB10**



**(3000K, 92CRI) • Spot 13°**

**(ILB10-030-SP)**




Center beam fc	Beam width ft
2ft	3 831 0.5
4ft	958 0.9
6ft	426 1.4
8ft	239 1.9
10ft	153 2.3
12ft	106 2.8

**Power:** 24.9W  
**Lumens:** 2,032 lm  
**Efficacy:** 81 lm/W  
**Max candela:** 17,161 cd

Photometric data multiplier	
Color temperature	Lumens (lm)
2700K	0.93
<b>3000K</b>	1.00
3500K	1.03
4000K	1.04

**(3000K, 92CRI) • Flood 32°**

**(ILB10-030-FL)**




Center beam fc	Beam width ft
2ft	1 546 1.2
4ft	387 2.3
6ft	172 3.5
8ft	96.6 4.6
10ft	61.9 5.8
12ft	43.0 6.9

**Power:** 24.9W  
**Lumens:** 2,032 lm  
**Efficacy:** 73 lm/W  
**Max candela:** 6,927 cd

Photometric data multiplier	
Color temperature	Lumens (lm)
2700K	0.93
<b>3000K</b>	1.00
3500K	1.03
4000K	1.04

**(3000K, 92CRI) • Wide Flood 47°**

**(ILB10-030-WF)**




Center beam fc	Beam width ft
2ft	752 1.7 1.8
4ft	188 3.4 3.7
6ft	83.5 5.2 5.5
8ft	47.0 6.9 7.4
10ft	30.1 8.6 9.2
12ft	20.9 10.3 11.1

**Power:** 25.0W  
**Lumens:** 2,056 lm  
**Efficacy:** 93 lm/W **Max candela:** 3,478 cd

Photometric data multiplier	
Color temperature	Lumens (lm)
2700K	0.93
<b>3000K</b>	1.00
3500K	1.03
4000K	1.03

**(3000K, 92CRI) • General Light**

**(ILB10-030-GL)**




Center beam fc	Beam width ft
2ft	249 2.0 2.9
4ft	62.4 4.0 5.7
6ft	27.7 6.0 8.6
8ft	15.6 8.0 11.4
10ft	9.98 10.0 14.3
12ft	6.93 12.0 17.1

**Power:** 24.7W  
**Lumens:** 1,210 lm  
**Efficacy:** 48 lm/W  
**Max candela:** 999 cd

Photometric data multiplier	
Color temperature	Lumens (lm)
2700K	0.98
<b>3000K</b>	1.00
3500K	1.03
4000K	1.09

**(3000K, 92CRI) • General Light Pro**

**(ILB10-030-GP)**




Center beam fc	Beam width ft
2ft	547 1.9
4ft	137 3.8
6ft	60.8 5.7
8ft	34.2 7.5
10ft	21.9 9.4
12ft	15.2 11.3

**Power:** 25.0W  
**Lumens:** 1,839 lm  
**Efficacy:** 73 lm/W **Max candela:** 2,452 cd

Photometric data multiplier	
Color temperature	Lumens (lm)
2700K	0.93
<b>3000K</b>	1.00
3500K	1.03
4000K	1.04

**PHOTOMETRIC DATA**


**ILB10**

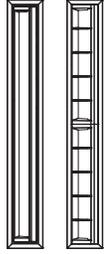

**WW WL**

**(3000K, 92CRI) • Wall Washer**

**(ILB10-030-WW)**




	Center beam fc	Beam width ft
2ft	140	1.8 2.3
4ft	35.0	3.6 4.6
6ft	15.6	5.4 6.8
8ft	8.76	7.2 9.1
10ft	5.61	9.0 11.4
12ft	3.89	10.8 13.7

**Power:** 25.0W  
**Lumens:** 840 lm  
**Efficacy:** 33 lm/W  
**Max candela:** 711 cd

Photometric data multiplier	
Color temperature	Lumens (lm)
2700K	0.92
<b>3000K</b>	1.00
3500K	1.04
4000K	1.04

**(3000K, 92CRI) • Wall Washer LGC**

**(ILB10-030-WL)**




	Center beam fc	Beam width ft
2ft	127	1.9 1.8
4ft	31.8	3.8 3.7
6ft	14.1	5.7 5.5
8ft	7.94	7.6 7.4
10ft	5.08	9.4 9.2
12ft	3.53	11.3 11.1

**Power:** 25.0W  
**Lumens:** 634 lm  
**Efficacy:** 25 lm/W  
**Max candela:** 645 cd

Photometric data multiplier	
Color temperature	Lumens (lm)
2700K	0.92
<b>3000K</b>	1.00
3500K	1.04
4000K	1.04

**(3000K, 92CRI) • Wide Flood Oval Longitudinal°**

**(ILB10-030-LW)**




	Center beam fc	Beam width ft
2ft	115	1.9 1.8
4ft	28.8	3.8 3.7
6ft	12.8	5.7 5.5
8ft	7.20	7.6 7.4
10ft	4.61	9.4 9.2
12ft	3.20	11.3 11.1

**Power:** 25.0W  
**Lumens:** 1,814 lm  
**Efficacy:** 72 lm/W  
**Max candela:** 1,727 cd

Photometric data multiplier	
Color temperature	Lumens (lm)
2700K	0.93
<b>3000K</b>	1.00
3500K	1.03
4000K	1.04

**(3000K, 92CRI) • Wide Flood Oval Transversal°**

**(ILB10-030-TW)**



	Center beam fc	Beam width ft
2ft	127	1.8 2.3
4ft	31.7	3.6 4.6
6ft	14.1	5.4 6.8
8ft	7.92	7.2 9.1
10ft	5.07	9.0 11.4
12ft	3.52	10.8 13.7

**Power:** 25.0W  
**Lumens:** 1,814 lm  
**Efficacy:** 72 lm/W  
**Max candela:** 1,711 cd

Photometric data multiplier	
Color temperature	Lumens (lm)
2700K	0.93
<b>3000K</b>	1.00
3500K	1.03
4000K	1.04


**PHOTOMETRIC DATA**

**ILB15**



**(3000K, 92CRI) • Spot 13°**

**(ILB15-030-SP)**




	Center beam fc	Beam width ft
2ft	5 728	0.5
4ft	1 432	0.9
6ft	636	1.4
8ft	358	1.9
10ft	229	2.3
12ft	159	2.8

**Power:** 36.5W  
**Lumens:** 3,039 lm  
**Efficacy:** 83 lm/W  
**Max candela:** 25,662 cd

Photometric data multiplier	
Color temperature	Lumens (lm)
2700K	0.93
<b>3000K</b>	1.00
3500K	1.03
4000K	1.04

**(3000K, 92CRI) • Flood 32°**

**(ILB15-030-FL)**




	Center beam fc	Beam width ft
2ft	2 312	1.2
4ft	578	2.3
6ft	257	3.5
8ft	145	4.6
10ft	92.5	5.8
12ft	64.2	6.9

**Power:** 36.5W  
**Lumens:** 3,039 lm  
**Efficacy:** 83 lm/W  
**Max candela:** 10,359 cd

Photometric data multiplier	
Color temperature	Lumens (lm)
2700K	0.93
<b>3000K</b>	1.00
3500K	1.03
4000K	1.04

**(3000K, 92CRI) • Wide Flood 47°**

**(ILB15-030-WF)**




	Center beam fc	Beam width ft
2ft	1 124	1.7 1.8
4ft	281	3.4 3.7
6ft	125	5.2 5.5
8ft	70.3	6.9 7.4
10ft	45.0	8.6 9.2
12ft	31.2	10.3 11.1

**Power:** 36.5W  
**Lumens:** 3,076 lm  
**Efficacy:** 84 lm/W  
**Max candela:** 5,200 cd

Photometric data multiplier	
Color temperature	Lumens (lm)
2700K	0.93
<b>3000K</b>	1.00
3500K	1.03
4000K	1.04

**(3000K, 92CRI) • General Light**

**(ILB15-030-GL)**




	Center beam fc	Beam width ft
2ft	383	2.0 2.9
4ft	95.8	4.0 5.7
6ft	42.6	6.0 8.6
8ft	24.0	8.0 11.4
10ft	15.3	10.0 14.3
12ft	10.6	12.0 17.1

**Power:** 36.5W  
**Lumens:** 1 859 lm  
**Efficacy:** 50 lm/W  
**Max candela:** 1,536 cd

Photometric data multiplier	
Color temperature	Lumens (lm)
2700K	0.98
<b>3000K</b>	1.00
3500K	1.03
4000K	1.04

**(3000K, 92CRI) • General Light Pro**

**(ILB15-030-GP)**




	Center beam fc	Beam width ft
2ft	821	1.9
4ft	205	3.8
6ft	91.2	5.7
8ft	51.3	7.5
10ft	32.8	9.4
12ft	22.8	11.3

**Power:** 36.5W  
**Lumens:** 2 758 lm  
**Efficacy:** 76 lm/W  
**Max candela:** 3,678 cd

Photometric data multiplier	
Color temperature	Lumens (lm)
2700K	0.93
<b>3000K</b>	1.00
3500K	1.03
4000K	1.04


**PHOTOMETRIC DATA**

ILB15

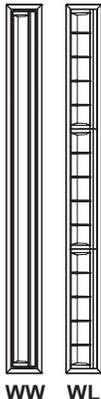

(3000K, 92CRI) • **Wall Washer**

**(ILB15-030-WW)**




	Center beam fc	Beam width ft
2ft	196	1.8 2.3
4ft	48.9	3.6 4.6
6ft	21.7	5.4 6.8
8ft	12.2	7.2 9.1
10ft	7.83	9.0 11.4
12ft	5.43	10.8 13.7

**Power:** 36.5W  
**Lumens:** 1,277 lm  
**Efficacy:** 33 lm/W  
**Max candela:** 1,082 cd

Photometric data multiplier	
Color temperature	Lumens (lm)
2700K	0.92
<b>3000K</b>	1.00
3500K	1.03
4000K	1.03

(3000K, 92CRI) • **Wall Washer LGC**

**(ILB15-030-WL)**



	Center beam fc	Beam width ft
2ft	173	1.9 1.8
4ft	44.6	3.8 3.7
6ft	19.8	5.7 5.5
8ft	11.1	7.6 7.4
10ft	7.14	9.4 9.2
12ft	4.95	11.3 11.1

**Power:** 36.5W  
**Lumens:** 958 lm  
**Efficacy:** 25 lm/W  
**Max candela:** 974 cd

Photometric data multiplier	
Color temperature	Lumens (lm)
2700K	0.93
<b>3000K</b>	1.00
3500K	1.04
4000K	1.04