



TRICK

Blade Effect - Remote

Project: _____
Type: _____



Surface mounted luminaire that emits a light blade without any unwanted dispersion.
Design by Dean Skira.

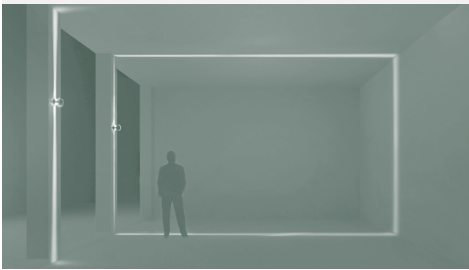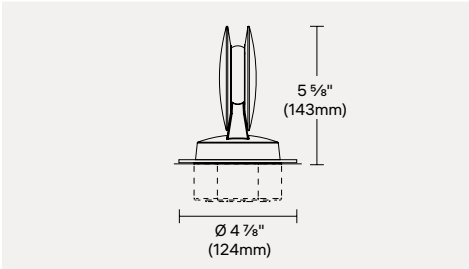

PHOTOMETRIC SUMMARY

Output	Optic	Lumens (lm)	Efficacy (lm/W)	Max Candela (cd)
BO	Blade 360°	144	19	467
HO	Blade 360°	172	18	561
BO	Blade Effect	31	5	271

For 3000K, 80CRI. Consult [page 4](#) for full photometric data.

FINISH OPTIONS



Consult factory for custom finishes

OPTIC OPTIONS



FEATURES

- Additional light effect available with integral driver: [180° Light Blade](#), [360° Light Blade](#), [Radial Effect](#) & [Wall Washer](#)
- Additional light effect available with remote driver: [180° Light Blade](#), [Radial Effect](#) & [Wall Washer](#)
- Consult factory for further customization
- Full specification available [page 3](#)



ORDERING INFO

PRODUCT CODE

EXAMPLE: ITRC-S-BO-JB-830-BL360-REM-01

MODEL	SIZE	OUTPUT	MOUNTING	LED	OPTIC	VOLTAGE	FINISH
ITRC Trick	S Small	BO Base Output 7.4W(BL360) 5.7W(LL)	JB Surface mounted junction box	830 3000K, 80CRI	BL360 Blade 360° LL¹ Blade Effect	REM Remote	01 White 02 Black 15 Gray F5 Rust Brown RAL#¹ Custom RAL

¹ Available with base output (BO).

² Additional fees may apply for custom finish. Contact factory for details.

DRIVER CODE

EXAMPLE: 4548-0450-018-120-LTE

DRIVER

Driver options are available on [page 2](#).

DM-RO | Last Update : July 7, 2025

iGuzzini

Due to continuous improvements, the information herein may be changed without notice.
9320 Boul. St-Laurent, suite 100, Montréal (Québec) Canada H2N 1N7 | P 514.523.1339 | F 514.525.6107 | www.iguzzini.com/us

TRICK

Blade Effect - Remote

Project: _____
Type: _____


REMOTE LED DRIVER OPTIONS

DRIVER CODE

EXAMPLE: 4548-0450-018-120-LTE

OUTDOOR RATED DRIVER BOX MODELS For ITRC-S-XX-XX-830-BL360	MIN-MAX UNITS	
	BO 7.4W*	HO 9.1W*
4548-0450-018-120-LTE	2	-
4548-0450-024-UNV-D10	1-2	-
4549-0450-024-UNV-ED10	1-2	-
4549-0450-024-UNV-SD10	1-2	-
4548-0550-025-120-LTE	-	2
4548-0550-030-UNV-D10	-	1-2
4549-0550-030-UNV-ED10	-	1-2
4549-0550-030-UNV-SD10	-	1-2

DRIVER BOX DIMENSIONS



OUTDOOR RATED

OUTDOOR RATED DRIVER BOX MODELS For ITRC-S-BO-XX-830-LL	MIN-MAX UNITS	
	BO 5.7W*	
4548-0350-012-120-LTE	1-2	
4548-0350-019-UNV-D10	1-3	
4549-0350-019-UNV-ED10	1-3	
4549-0350-019-UNV-SD10	1-3	

* Wattage requirement for one (1) fixture (Remote fixture only).


DRIVER BOX MODEL DESCRIPTION

MODEL (L x W x H)	CONSTANT CURRENT	WATTAGE	VOLTAGE	DIMMING PROTOCOL
4548 6" x 4.5" x 3" (152 x 114 x 76mm)	0350 to 0550 350mA to 550mA	012 to 030 12W to 30W	120 120V	LTE Leading & Trailing Edge (ELV & TRIAC) Dimming Range Down to 15% Max Distance 30ft (9m) ¹
4549 14.5" x 5" x 3.5" (368 x 127 x 89mm)			UNV 120-277V	D10 0-10V Dimming Range Down to 10% Max Distance 30ft (9m) ¹ ED10 0-10V ELDOLED ECOdrive Dimming Range Down to ±1% Max Distance 118ft (36m) ¹ SD10 0-10V ELDOLED SOLOdrive Dimming Range Down to 0.1% Max Distance 118ft (36m) ¹

WIRING DIAGRAMS

Single-Channel Drivers

Multiple luminaires must be connected in series (home run or fixture chain)



TRICK**Blade Effect - Remote**

Project: _____

Type: _____

SPECIFICATIONS**LUMEN MAINTENANCE**

80% of initial lumens at 100 000 hours (L80 B10) T77°F (25°C)

Only for BO: 80% of initial lumens at 100 000 hours (L80 B10) T104°F (40°C)**OPTICS**

360° blade effect and light blade.

MATERIAL**Body:** Die-cast aluminum**Diffuser:** PMMA lens**Hardware:** Stainless steel screws**MOUNTING**

Wall or ceiling mounted, to be installed on a standard octagonal 4" junction box. Floor mounting in dry location only (interior).

ELECTRICAL


High efficiency dimmable remote LED driver, rated at 50 000 hours.

See remote LED driver options on [page 2](#).**DIMMING**See remote dimming options on [page 2](#).**FINISH**

Black (RAL9005), Gray (RAL9007), Rust Brown (RAL8017), and White (RAL9016) painted with a high level of weather and UV resistance. The semi-gloss finish coating is electrostatically applied durable acrylic enamel baked at high temperatures for superior color retentive finish. We provide RAL numbers that are similar, but we cannot guarantee an exact color match. For a more accurate color and gloss match, please contact customer service for a sample chip.

OPERATING TEMPERATURE**BO:** From -30°C to 50°C (-22°F to 122°F)**HO:** From -30°C to 35°C (-22°F to 95°F)**WEIGHT**

1.1lb (0.5kg)

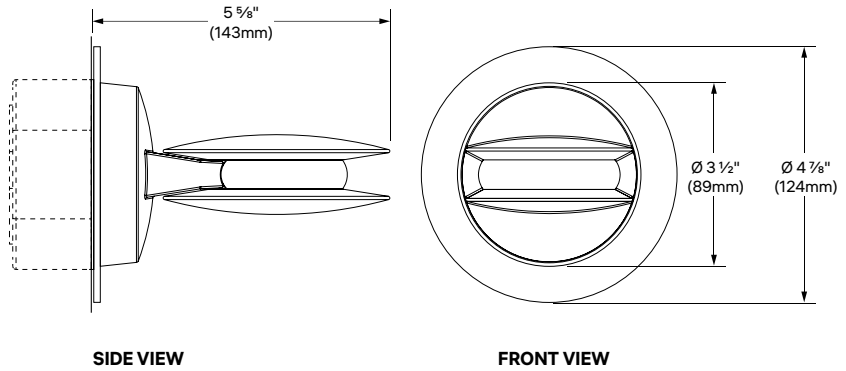DIMENSIONS**FAMILY OVERVIEW**

Low voltage version with remote LED driver

**S - SMALL**

Blade
360°

Blade
Effect

**S - SMALL**

Blade
180°

**S - SMALL**

Radial
360°

**S - SMALL**

Wall
Washer

TRICK



Blade Effect - Remote

Project: _____
Type: _____

PHOTOMETRIC DATA



CCT (K)	CRI	OUTPUT	POWER (W)	OPTIC	LUMENS (lm)	EFFICACY (lm/W)	MAX CANDELA (cd)	MODELS
3000	80	BO	7.4	360° Blade Effect	144	19	467	ITRC-S-BO-XX-830-BL360
		HO	9.1	360° Blade Effect	172	18	561	ITRC-S-HO-XX-830-BL360

Power can vary with selected drivers. Efficacy based on IESNA LM-79 test reports. Visit iguzzini.com/us for complete photometric data.

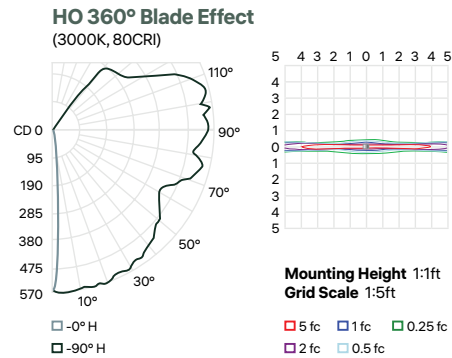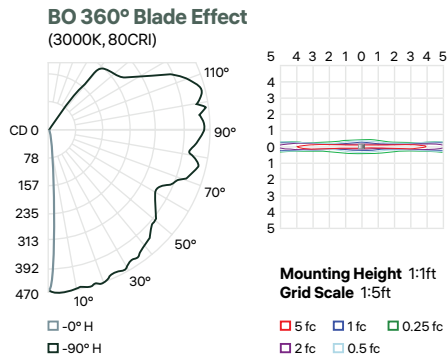

CCT (K)	CRI	OUTPUT	POWER (W)	OPTIC	LUMENS (lm)	EFFICACY (lm/W)	MAX CANDELA (cd)	MODELS
3000	80	BO	5.7	Blade Effect	31	5	271	ITRC-S-BO-XX-830-LL

Power can vary with selected drivers. Efficacy based on IESNA LM-79 test reports. Visit iguzzini.com/us for complete photometric data.

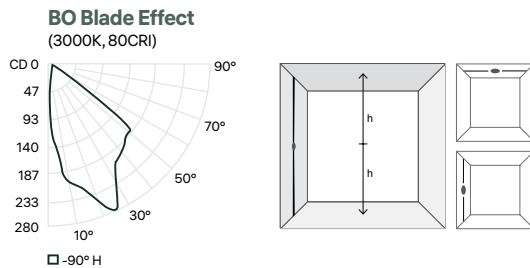

Distance (h)	Blade Width	Illuminance
3.2'	3.5"	33.45 fc
6.5'	7"	8.36 fc
9.8'	10.6"	3.72 fc