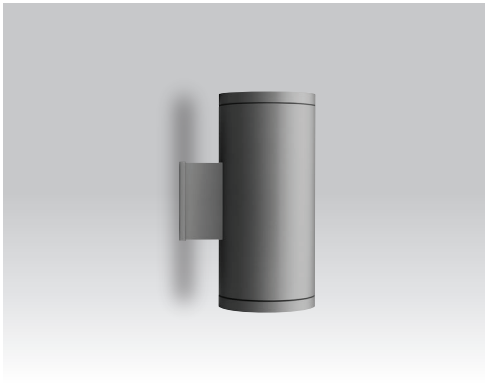

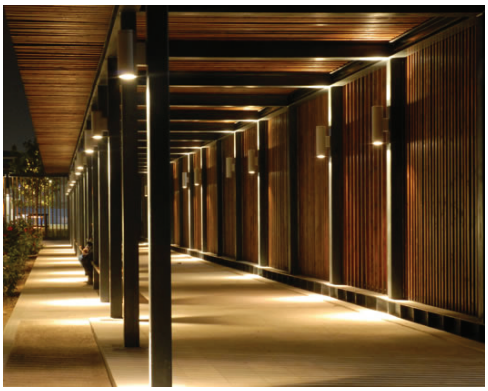

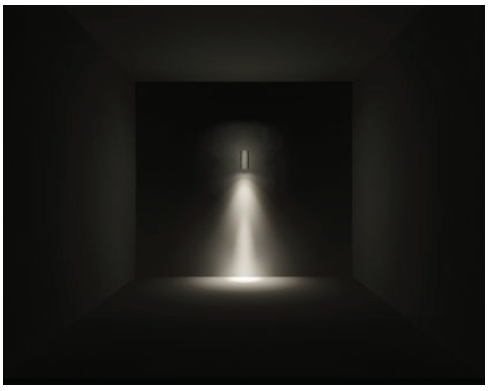

Collection of wall mounted luminaires for exterior applications. Exceptional European build quality with high corrosion resistant finish. Robust marine grade die-cast aluminum construction with stainless steel fasteners and factory and glass diffuser.

Luminaire characteristics:	**Power input:** 34.5W (per lamp) **Lumens:** 2 530lm (per lamp for 3000K, 90CRI) **Luminaire efficacy:** 73lm/W
Source:	White LED module (LM-80) 2700K : 90CRI 3000K : 90CRI 4000K : 90CRI
Lumen maintenance:	70% of initial lumens at 50 000 hours (L70)(LM-79).
Optics:	Narrow Flood, adjustable ±15°, up and/or down.
Material:	Body: Die-cast aluminum Reflector: 99.98% pure anodized aluminum Diffuser: Clear tempered glass Mounting plate: Machined aluminum Hardware: Stainless steel screws
Mounting:	Luminaire can be installed as up and/or downlight. Installs on a standard 4" octagonal junction box. The center of junction box is located 1-3/8” higher than the center of the luminaire.
Electrical:	Integral high effeciency electronic driver, rated at 50 000 hours, 120-277V.
Dimming:	Down to 15%, 0-10V (120-277V).
Finish:	Aluminum painted finish, following a double powder paint in 3 step process: surface treatment containing ceramic nano particles (Bonderite). Epoxy primer paint. Polyester powder paint with high resistance against UV rays and harsh weather conditions.
Weight:	15.2 / 19lbs (6.8 / 8.6kg)
Warranty:	5 year limited warranty.
Ratings:	IP65, IK08
Certification:	cULus listed for wet location.

SISTEMALUX
9320 Boul. St-Laurent, suite 100, Montréal (Québec) Canada H2N 1N7, P.: 514.523.1339 F.: 514.525.6107 www.sistemalux.com

ORDERING INFO

- UNV - 14 - D10
FIXTURE

RESET

MODEL

- ☐ **S3834 -** Down
- ☐ **S3835 -** Up/Down

LED

- ☐ **H -** 2700K, 90CRI
- ☐ **W -** 3000K, 90CRI
- ☐ **N -** 4000K, 90CRI

VOLTAGE

- ■ **UNV -** 120-277V

FINISH

- ■ **14 -** Aluminum gray

DIMMING

- ■ **D10 -** 0-10V (down to 15%)

SISTEMALUX
9320 Boul. St-Laurent, suite 100, Montréal (Québec) Canada H2N 1N7, P.: 514.523.1339 F.: 514.525.6107 www.sistemalux.com

DIMENSIONS

S3834

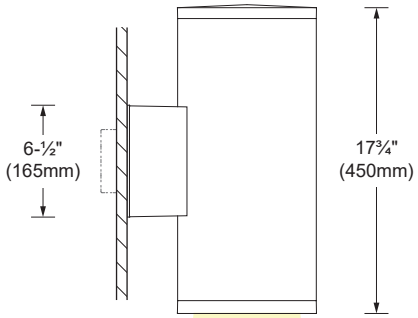

S3835

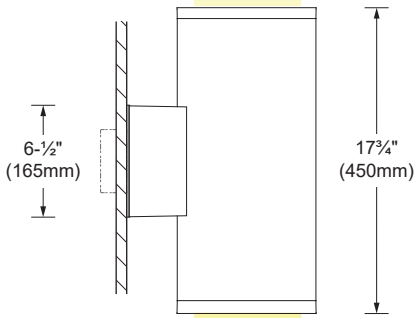

SIDE VIEW

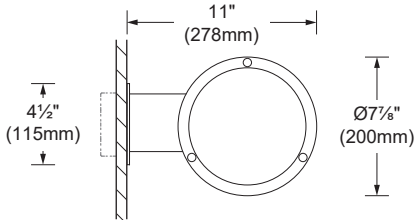

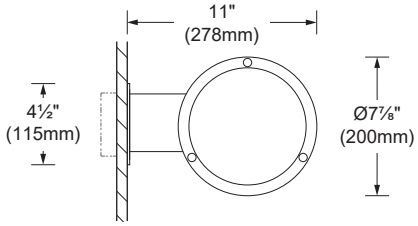

BOTTOM VIEW

SISTEMALUX
9320 Boul. St-Laurent, suite 100, Montréal (Québec) Canada H2N 1N7, P.: 514.523.1339 F.: 514.525.6107 www.sistemalux.com

PHOTOMETRIC DATA

Visit sistemalux.com for complete photometric data.

CCT (K)	CRI	LOAD (W)	OPTIC	LUMENS (lm)	EFFICACY (lm/w)	MAX CANDELA (cd)	MODELS
3000K	90	34.5	Flood 30°	2 530	73	8 770	S3834W

Flood 30° (3000K, 90CRI)



	Center beam fc	Beam width ft
2ft	2 185	1.1
4ft	546	2.1
6ft	243	3.2
8ft	137	4.3
10ft	87.4	5.3
12ft	60.7	6.4

CCT (K)	CRI	POWER (W)	OPTIC	LUMENS (lm)	EFFICACY (lm/w)	MAX CANDELA (cd)	MODELS
3000K	90	69	Flood 30°	5 060	73	17 540	S3835W

Flood 30° (3000K, 90CRI)

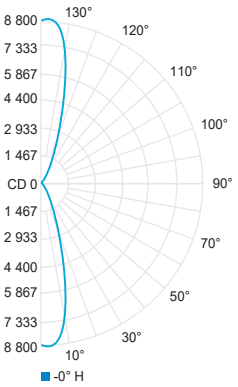

	Center beam fc	Beam width ft
2ft	2 185	1.1
4ft	546	2.1
6ft	243	3.2
8ft	137	4.3
10ft	87.4	5.3
12ft	60.7	6.4

CCT options	2700K	3000K	4000K
CRI options	90CRI	90CRI	90CRI
Multiplier	**0.94**	**1**	**1.03**