



BOTTOM VIEW


All model lengths have a width of 1 1/16"

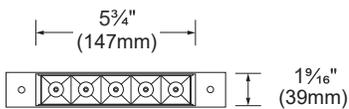

LB05

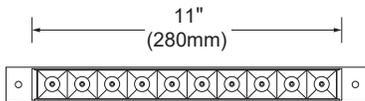

LB10



LB15

Luminaire characteristic:

Data varies depending on the optic of the luminaire.

| CCT (K) | CRI | MODEL | OPTIC | SYSTEM POWER (W) | LUMENS (lm) | EFFICACY (lm / W) | MAX CANDELA (cd) |
|---------|-----|----------|----------------|------------------|-------------|-------------------|------------------|
| 3000 | 92 | 5 cells | Spot 13° | 13.0 | 1 016 | 77 | 8 581 |
| | | | Flood 13° | 13.0 | 1 015 | 77 | 3 464 |
| | | | Wide Flood 13° | 13.0 | 1 028 | 78 | 1 738 |
| | | | Wall Washer | 13.0 | 420 | 32 | 355 |
| | | 10 cells | Spot 13° | 25.0 | 2 032 | 81 | 17 161 |
| | | | Flood 13° | 25.0 | 2 032 | 73 | 6 927 |
| | | | Wide Flood 13° | 25.0 | 1 836 | 93 | 3 105 |
| | | | Wall Washer | 25.0 | 840 | 33 | 711 |
| | | 15 cells | Spot 13° | 36.5 | 3 039 | 83 | 25 662 |
| | | | Flood 13° | 36.5 | 3 039 | 83 | 10 359 |
| | | | Wide Flood 13° | 36.5 | 3 076 | 84 | 5 200 |
| | | | Wall Washer | 36.5 | 1 277 | 33 | 1 082 |

N.B.: More optics available.

Source:

White LED module (LM-80)
2700K: 92CRI (90CRI min),
3000K: 92CRI (90CRI min),
3500K: 92CRI (90CRI min),
4000K: 92CRI (90CRI min).

Lumen maintenance:

90% of initial lumens at 50 000 hours (L90) (LM-80).

Optics:

Low luminance: Spot 13°, flood 32°, wide flood 47°,
general light pro, medium oval transversal or longitudinal
and wide flood oval transversal or longitudinal optics
with Opti Beam technology.

Material:

Body and heat sink: Extruded aluminum
Reflector and baffle: Thermoplastic
Housing: Galvanized steel
End caps: Die cast aluminum

Mounting:

Height-adjustable Housing for Wooden Slat
Ceilings.

Electrical:

High efficiency LED driver ratings

Dimming:

0-10V diming (120-277V).
LTE dimming (120V).
Down to ±1% dimming range.

Finish:

Body: Black, White, Gray.
Baffle: Black (RAL9005), White (RAL9010).

Weight:

ILB05: **H:** 1.256lbs (0.57kg) **L:** 1.119lbs (0.50kg)
ILB10: **H:** 2.179lbs (0.99kg) **L:** 1.970lbs (0.90kg)
ILB15: **H:** 2.979lbs (1.35kg) **L:** 2.757lbs (1.25kg)

Warranty:

5 year limited warranty.

Ratings:

IP20, IP23 (from under the ceiling)

Certification:



cULus listed for damp location. Interior use only.



ORDERING INFO

PRODUCT CODE

INSTALLATION CODE

| MODEL | INSTALLATION | PROFILE | LED | OPTIC | VOLTAGE | FINISH (body/baffle) | DIMMING |
|--------------------------|--|-------------------------|---|---|-------------------------------------|--|---|
| ILB05 05 cells | W Height-Adjustable housing for Wood Slat Ceilings | L Low profile | 027 ¹ 2700K, 92CRI | SP Spot (13°) | UNV ⁵ 120-277V | 01 White / Black  | D10 0-10V (down to 1%) LTE (down to 1%) |
| ILB10 10 cells | | | 030 ¹ 3000K, 92CRI | FL Flood (32°) | | 31 ⁴ White / White  | |
| ILB15 15 cells | | | 035 ¹ 3500K, 92CRI | WF Wide flood (47°) | | 02 Black / Black  | |
| | | | 040 ¹ 4000K, 92CRI | GP General light pro | | 22 Gray / Black  | |
| | | | | LM ² Medium oval longitudinal | | | |
| | | | | TM ² Medium oval transversal | | | |
| | | | | LW ³ Wide flood oval longitudinal | | | |
| | | | | TW ³ Wide flood oval transversal | | | |
| | | | | WW Wall washer | | | |
| | | | | WL Wall washer LGC (Longitudinal glare control) | | | |







¹ 92CRI typical - 90CRI minimum.
² Available with five (05) model.
³ Available with five (05) and ten (10) models.
⁴ Not Available with Wall washer (WW) and Wall washer LGC (WL) Optics.
 *Custom finish available, contact customer service for details.

INSTALLATION OPTIONS

**Asjustable housing for
Wooden Slat Ceilings (W)**



Height-Adjustable housing with hanger bars system for Wood Slat Ceilings installation.
Housing can be shipped separately.

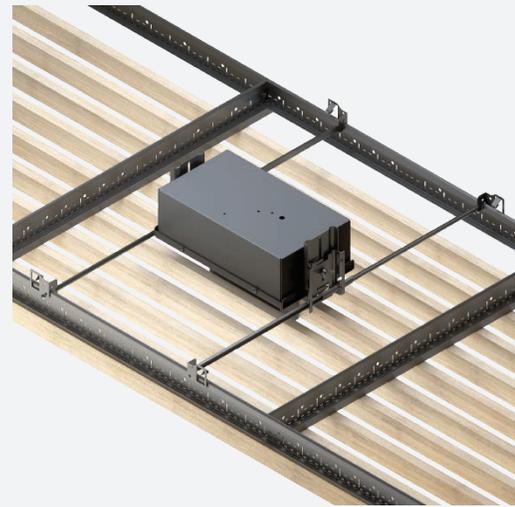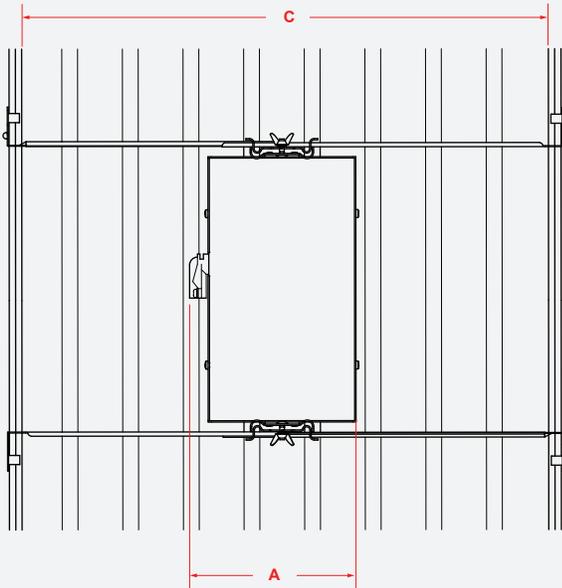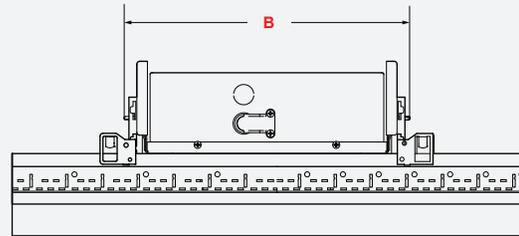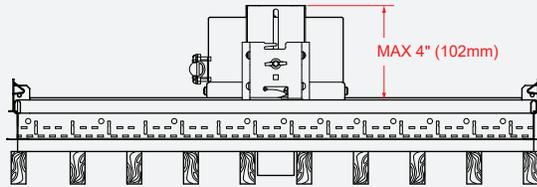

Housing is sold in a black finish by default







| Model | Housing | Overall dimensions (AxB) | C | Housing Weight |
|-------|-----------|----------------------------|---------------------------|-------------------|
| ILB05 | BI-LB05-W | 6.3" x 12.4" (160 x 315mm) | 14¼" to 26" (362 x 660mm) | 4.106lbs (1.9kg) |
| ILB10 | BI-LB10-W | 6.3" x 19.0" (160 x 483mm) | | 5.591lbs (2.53kg) |
| ILB15 | BI-LB15-W | 9.0" x 25.7" (229 x 653mm) | | 8.770lbs (3.98kg) |

DIMENSION AND CONFIGURATION

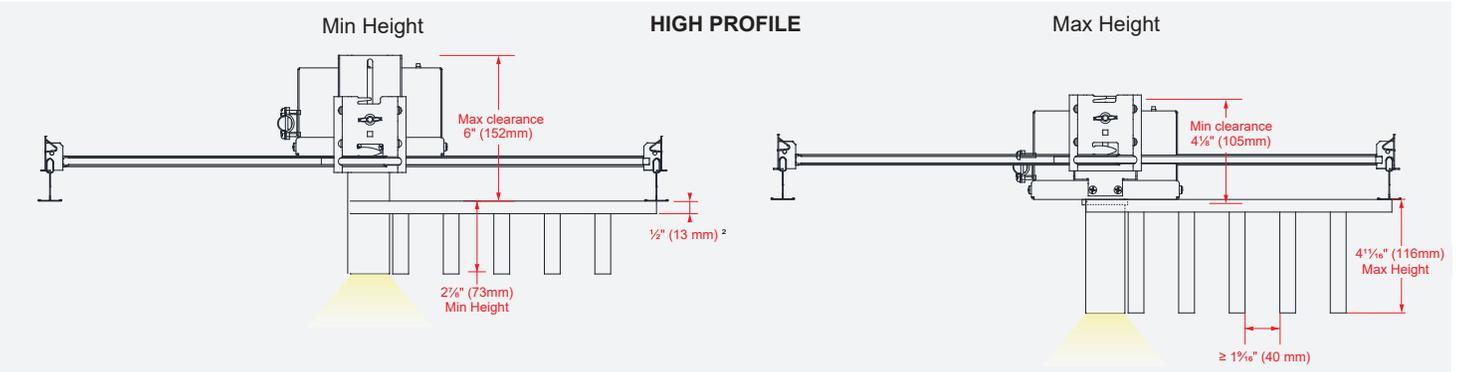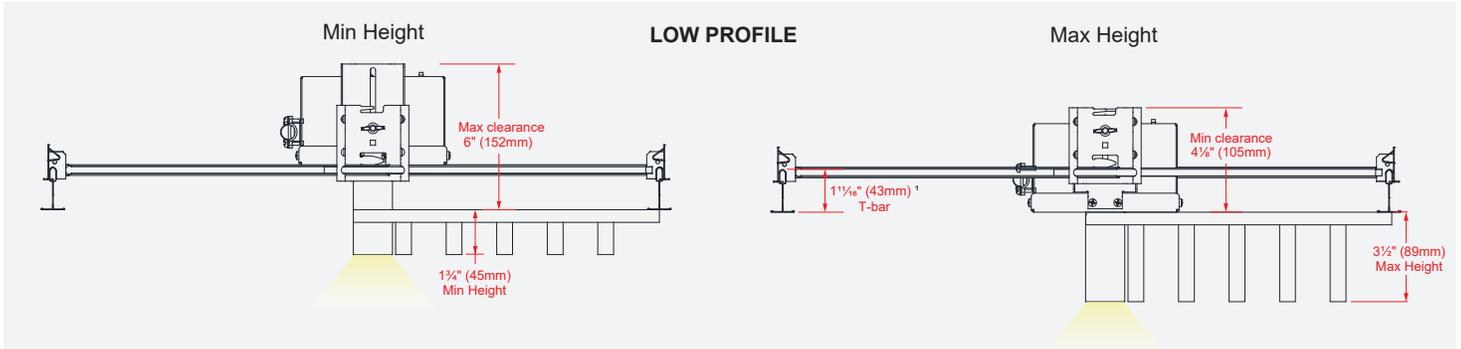


- 1 The height of T-bars could vary according to the supplier.
- 2 This dimension could change depending on the structure.


LASER BLADE MODULE DIMENSIONS

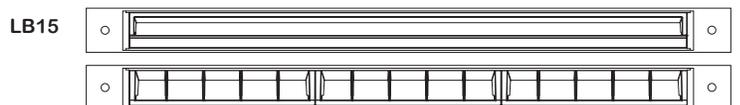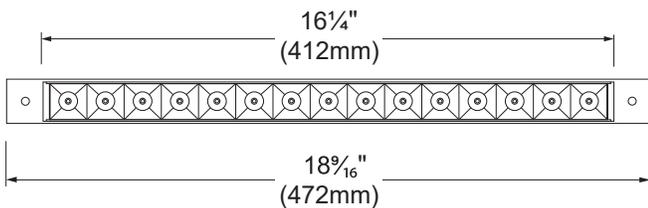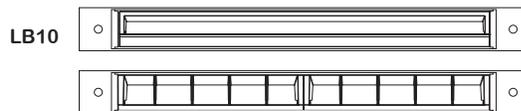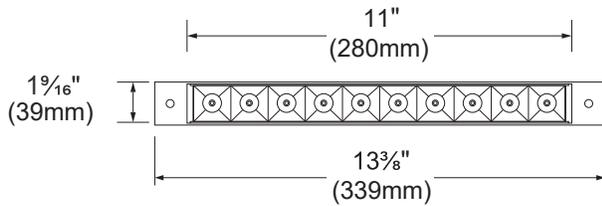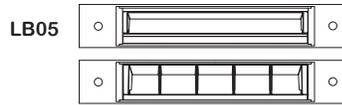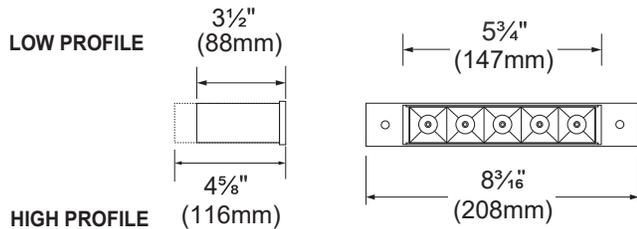

Visual comfort UGR < 10.

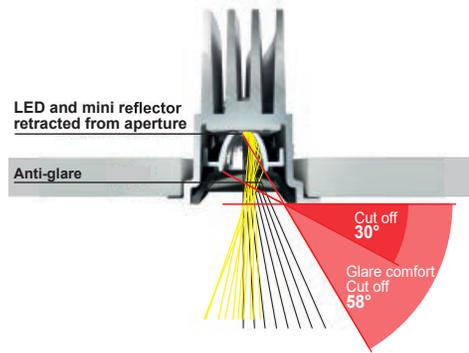


SPACING FOR WALL WASHER OPTICS

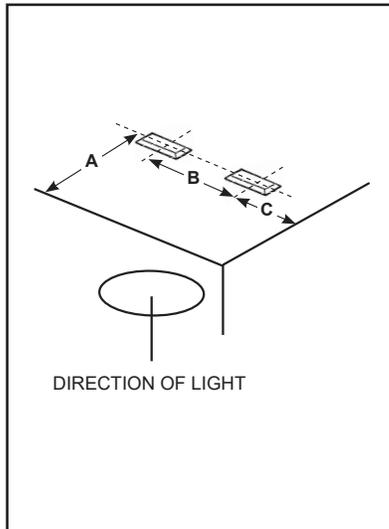

| WW WALL WASHER WL WALL WASHER LONGITUDINAL | SUGGESTED | | |
|---|-----------------|-----------------|----------------|
| | In (mm) | | |
| | A mm | B mm | C mm |
| ILB05-WX-XXX-WW | 32" (800mm) | 32" (800mm) | 16" (400mm) |
| ILB10-WX-XXX-WW ILB15-WX-XXX-WW | 40" (1000mm) | 40" (1000mm) | 20" (500mm) |
| ILB05-WX-XXX-WL | 32" (800mm) | 24" (600mm) | 12" (300mm) |
| ILB10-WX-XXX-WL | 40" (1000mm) | 30" (750mm) | 15" (375mm) |
| ILB10-WX-XXX-WL | 40" (1000mm) | 30" (800mm) | 16" (400mm) |



OVAL BEAM DISTRIBUTION

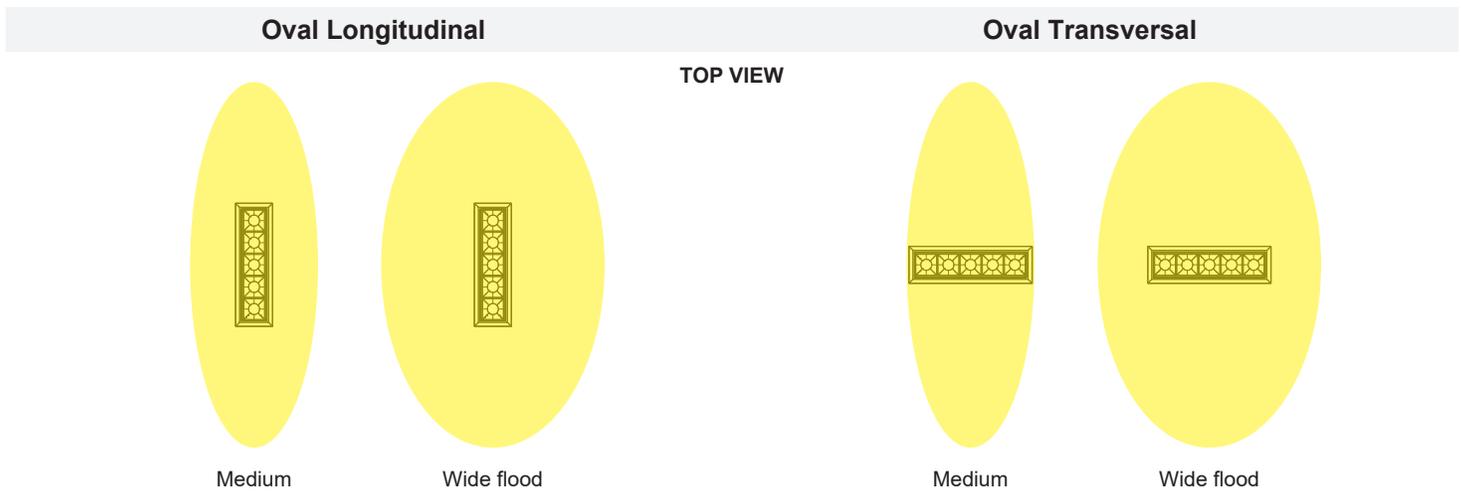

LED COLOR FIDELITY DATA¹


| I | R T | R1 | R2 | R3 | R4 | R5 | R6 | R7 | R8 | R9 | R10 | R11 | R12 | R13 | R14 | R15 | Melanopic ratio |
|---|-------|----|----|----|----|----|----|----|----|----|-----|-----|-----|-----|-----|-----|-----------------|
| C | 2700K | 93 | 95 | 95 | 94 | 93 | 95 | 93 | 84 | 63 | 88 | 96 | 87 | 94 | 97 | 90 | 0.478 |
| | 3000K | 93 | 94 | 93 | 94 | 92 | 92 | 94 | 86 | 65 | 85 | 95 | 83 | 93 | 95 | 90 | 0.525 |
| | 3500K | 94 | 94 | 92 | 93 | 93 | 91 | 94 | 89 | 71 | 84 | 94 | 80 | 93 | 95 | 92 | 0.553 |
| | 4000K | 98 | 97 | 94 | 96 | 97 | 94 | 96 | 95 | 85 | 91 | 95 | 83 | 97 | 96 | 97 | 0.553 |

¹ This data may be subjected to change.

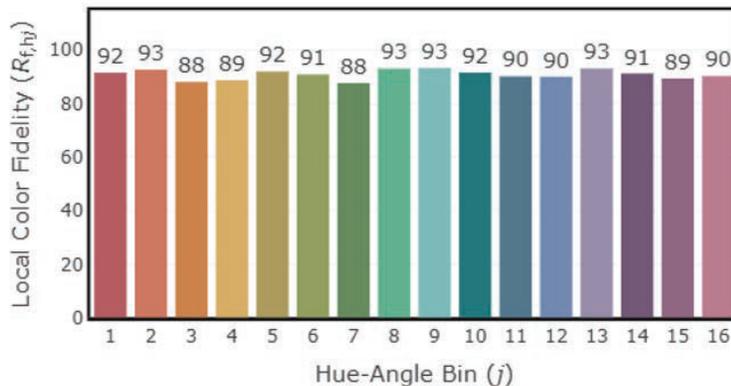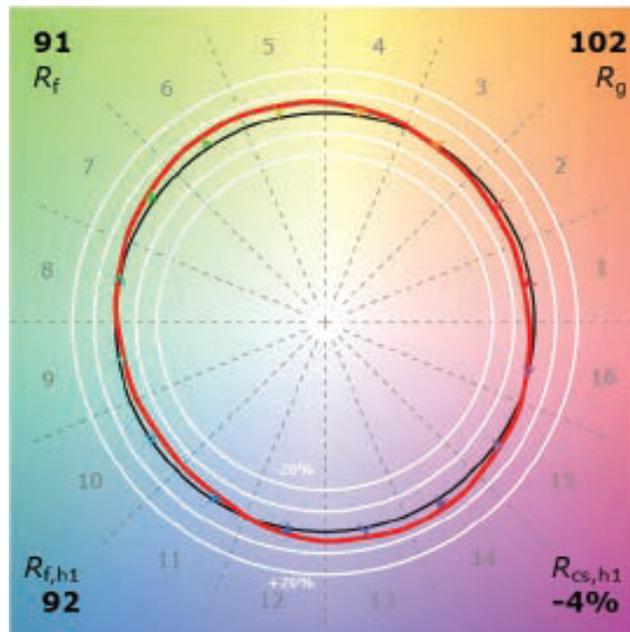


PHOTOMETRIC DATA

ILB05



(3000K, 92CRI) • Spot 13°

(ILB05-030-SP)




| Center beam fc | Beam width ft |
|----------------|---------------|
| 2ft | 1 915 0.5 |
| 4ft | 479 0.9 |
| 6ft | 213 1.4 |
| 8ft | 120 1.9 |
| 10ft | 76.6 2.3 |
| 12ft | 53.2 2.8 |

Power: 13.0W
Lumens: 1,016 lm
Efficacy: 77 lm/W
Max candela: 8,581 cd

| Photometric data multiplier | |
|-----------------------------|-------------|
| Color temperature | Lumens (lm) |
| 2700K | 0.93 |
| 3000K | 1.00 |
| 3500K | 1.03 |
| 4000K | 1.03 |

(3000K, 92CRI) • Flood 32°

(ILB05-030-FL)




| Center beam fc | Beam width ft |
|----------------|---------------|
| 2ft | 773 1.2 |
| 4ft | 193 2.3 |
| 6ft | 85.9 3.5 |
| 8ft | 48.3 4.6 |
| 10ft | 30.9 5.8 |
| 12ft | 21.5 6.9 |

Power: 13.0W
Lumens: 1,015 lm
Efficacy: 77 lm/W
Max candela: 3,464 cd

| Photometric data multiplier | |
|-----------------------------|-------------|
| Color temperature | Lumens (lm) |
| 2700K | 0.93 |
| 3000K | 1.00 |
| 3500K | 1.03 |
| 4000K | 1.03 |

(3000K, 92CRI) • Wide Flood 47°

(ILB05-030-WF)




| Center beam fc | Beam width ft |
|----------------|----------------|
| 2ft | 376 1.7 1.8 |
| 4ft | 94 3.4 3.7 |
| 6ft | 41.8 5.2 5.5 |
| 8ft | 23.5 6.9 7.4 |
| 10ft | 15.0 8.6 9.2 |
| 12ft | 10.4 10.3 11.1 |

Power: 13.0W
Lumens: 1,028 lm
Efficacy: 78 lm/W
Max candela: 1,738 cd

| Photometric data multiplier | |
|-----------------------------|-------------|
| Color temperature | Lumens (lm) |
| 2700K | 0.93 |
| 3000K | 1.00 |
| 3500K | 1.03 |
| 4000K | 1.03 |

(3000K, 92CRI) • General Light Pro

(ILB05-030-GP)




| Center beam fc | Beam width ft |
|----------------|---------------|
| 2ft | 274 1.9 |
| 4ft | 68.4 3.8 |
| 6ft | 30.4 5.7 |
| 8ft | 17.1 7.5 |
| 10ft | 11 9.4 |
| 12ft | 7.60 11.3 |

Power: 13.0W
Lumens: 919 lm
Efficacy: 70 lm/W
Max candela: 1,226 cd

| Photometric data multiplier | |
|-----------------------------|-------------|
| Color temperature | Lumens (lm) |
| 2700K | 0.93 |
| 3000K | 1.00 |
| 3500K | 1.03 |
| 4000K | 1.03 |

(3000K, 92CRI) • Wall Washer

(ILB05-030-WW)




| Center beam fc | Beam width ft |
|----------------|----------------|
| 2ft | 70.1 1.8 2.3 |
| 4ft | 17.5 3.6 4.6 |
| 6ft | 7.79 5.4 6.8 |
| 8ft | 4.38 7.2 9.1 |
| 10ft | 2.80 9.0 11.4 |
| 12ft | 1.95 10.8 13.7 |

Power: 13.0W
Lumens: 420 lm
Efficacy: 32 lm/W
Max candela: 355 cd

| Photometric data multiplier | |
|-----------------------------|-------------|
| Color temperature | Lumens (lm) |
| 2700K | 0.92 |
| 3000K | 1.00 |
| 3500K | 1.04 |
| 4000K | 1.04 |

(3000K, 92CRI) • Wall Washer LGC

(ILB05-030-WL)



| Center beam fc | Beam width ft |
|----------------|----------------|
| 2ft | 57.8 1.9 1.8 |
| 4ft | 14.5 3.8 3.7 |
| 6ft | 6.43 5.7 5.5 |
| 8ft | 3.61 7.6 7.4 |
| 10ft | 2.31 9.4 9.2 |
| 12ft | 1.61 11.3 11.1 |


Power: 13.0W
Lumens: 324 lm
Efficacy: 24 lm/W
Max candela: 329 cd

| Photometric data multiplier | |
|-----------------------------|-------------|
| Color temperature | Lumens (lm) |
| 2700K | 0.92 |
| 3000K | 1.00 |
| 3500K | 1.04 |
| 4000K | 1.04 |

PHOTOMETRIC DATA

(3000K, 92CRI) • Medium Oval Longitudinal

(ILB05-030-LM)




| Center beam fc | Beam width ft | |
|----------------|---------------|----------|
| 2ft | 327 | 0.8 3.0 |
| 4ft | 81.8 | 1.6 6 |
| 6ft | 36.4 | 2.4 9.1 |
| 8ft | 20.5 | 3.2 12.2 |
| 10ft | 13.1 | 4.0 15.2 |
| 12ft | 9.09 | 4.8 18.3 |

Power: 13.0W
Lumens: 907 lm
Efficacy: 69 lm/W
Max candela: 1,512 cd

| Photometric data multiplier | |
|-----------------------------|-------------|
| Color temperature | Lumens (lm) |
| 2700K | 0.93 |
| 3000K | 1.00 |
| 3500K | 1.03 |
| 4000K | 1.03 |

(3000K, 92CRI) • Medium Oval Transversal

(ILB05-030-TM)




| Center beam fc | Beam width ft | |
|----------------|---------------|----------|
| 2ft | 297 | 3.1 0.8 |
| 4ft | 74.3 | 1.6 1.6 |
| 6ft | 33.0 | 9.2 2.4 |
| 8ft | 18.6 | 12.3 3.3 |
| 10ft | 11.9 | 15.3 4.1 |
| 12ft | 8.26 | 18.4 4.9 |

Power: 13.0W
Lumens: 883 lm
Efficacy: 67 lm/W
Max candela: 1,406 cd

| Photometric data multiplier | |
|-----------------------------|-------------|
| Color temperature | Lumens (lm) |
| 2700K | 0.93 |
| 3000K | 1.00 |
| 3500K | 1.03 |
| 4000K | 1.03 |

(3000K, 92CRI) • Wide Flood Oval Longitudinal

(ILB05-030-LW)




| Center beam fc | Beam width ft | |
|----------------|---------------|----------|
| 2ft | 191 | 1.5 3.6 |
| 4ft | 47.8 | 3.1 7.2 |
| 6ft | 21.2 | 4.6 10.8 |
| 8ft | 11.9 | 6.2 14.4 |
| 10ft | 7.64 | 7.7 18.0 |
| 12ft | 5.31 | 9.2 21.6 |

Power: 13.0W
Lumens: 907 lm
Efficacy: 69 lm/W
Max candela: 864 cd

| Photometric data multiplier | |
|-----------------------------|-------------|
| Color temperature | Lumens (lm) |
| 2700K | 0.98 |
| 3000K | 1.00 |
| 3500K | 1.03 |
| 4000K | 1.03 |

(3000K, 92CRI) • Wide Flood Oval Transversal

(ILB05-030-TW)




| Center beam fc | Beam width ft | |
|----------------|---------------|-----------|
| 2ft | 187 | 3.6 1.5 |
| 4ft | 46.8 | 7.1 3.1 |
| 6ft | 20.8 | 10.7 4.6 |
| 8ft | 11.7 | 14.3 6.1 |
| 10ft | 7.49 | 17.9 7.6 |
| 12ft | 5.20 | 21.4 19.2 |

Power: 13.0W
Lumens: 907 lm
Efficacy: 69 lm/W
Max candela: 856 cd

| Photometric data multiplier | |
|-----------------------------|-------------|
| Color temperature | Lumens (lm) |
| 2700K | 0.98 |
| 3000K | 1.00 |
| 3500K | 1.03 |
| 4000K | 1.03 |


PHOTOMETRIC DATA

ILB10

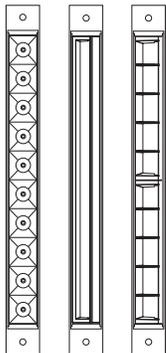

(3000K, 92CRI) • Spot 13°

(ILB10-030-SP)




| Center beam fc | Beam width ft |
|----------------|---------------|
| 2ft | 3 831 0.5 |
| 4ft | 958 0.9 |
| 6ft | 426 1.4 |
| 8ft | 239 1.9 |
| 10ft | 153 2.3 |
| 12ft | 106 2.8 |

Power: 25.0W
Lumens: 2,032 lm
Efficacy: 81 lm/W
Max candela: 17,161 cd

| Photometric data multiplier | |
|-----------------------------|-------------|
| Color temperature | Lumens (lm) |
| 2700K | 0.93 |
| 3000K | 1.00 |
| 3500K | 1.03 |
| 4000K | 1.04 |

(3000K, 92CRI) • Flood 32°

(ILB10-030-FL)




| Center beam fc | Beam width ft |
|----------------|---------------|
| 2ft | 1 546 1.2 |
| 4ft | 387 2.3 |
| 6ft | 172 3.5 |
| 8ft | 96.6 4.6 |
| 10ft | 61.9 5.8 |
| 12ft | 43.0 6.9 |

Power: 25.0W
Lumens: 2,032 lm
Efficacy: 73 lm/W
Max candela: 6,927 cd

| Photometric data multiplier | |
|-----------------------------|-------------|
| Color temperature | Lumens (lm) |
| 2700K | 0.93 |
| 3000K | 1.00 |
| 3500K | 1.03 |
| 4000K | 1.04 |

(3000K, 92CRI) • Wide Flood 47°

(ILB10-030-WF)




| Center beam fc | Beam width ft |
|----------------|----------------|
| 2ft | 752 1.7 1.8 |
| 4ft | 188 3.4 3.7 |
| 6ft | 83.5 5.2 5.5 |
| 8ft | 47.0 6.9 7.4 |
| 10ft | 30.1 8.6 9.2 |
| 12ft | 20.9 10.3 11.1 |

Power: 25.0W
Lumens: 2,056 lm
Efficacy: 93 lm/W
Max candela: 3,478 cd

| Photometric data multiplier | |
|-----------------------------|-------------|
| Color temperature | Lumens (lm) |
| 2700K | 0.93 |
| 3000K | 1.00 |
| 3500K | 1.03 |
| 4000K | 1.04 |

(3000K, 92CRI) • General Light Pro

(ILB10-030-GP)



| Center beam fc | Beam width ft |
|----------------|---------------|
| 2ft | 547 1.9 |
| 4ft | 137 3.8 |
| 6ft | 60.8 5.7 |
| 8ft | 34.2 7.5 |
| 10ft | 21.9 9.4 |
| 12ft | 15.2 11.3 |


Power: 25.0W
Lumens: 1,839 lm
Efficacy: 73 lm/W
Max candela: 2,452 cd

| Photometric data multiplier | |
|-----------------------------|-------------|
| Color temperature | Lumens (lm) |
| 2700K | 0.93 |
| 3000K | 1.00 |
| 3500K | 1.03 |
| 4000K | 1.04 |

PHOTOMETRIC DATA

(3000K, 92CRI) • Wall Washer

(ILB10-030-WW)




| Center beam fc | Beam width ft | |
|----------------|---------------|-----------|
| 2ft | 140 | 1.8 2.3 |
| 4ft | 35.0 | 3.6 4.6 |
| 6ft | 15.6 | 5.4 6.8 |
| 8ft | 8.76 | 7.2 9.1 |
| 10ft | 5.61 | 9.0 11.4 |
| 12ft | 3.89 | 10.8 13.7 |

Power: 25.0W
Lumens: 840 lm
Efficacy: 33 lm/W
Max candela: 711 cd

| Photometric data multiplier | |
|-----------------------------|-------------|
| Color temperature | Lumens (lm) |
| 2700K | 0.92 |
| 3000K | 1.00 |
| 3500K | 1.04 |
| 4000K | 1.04 |

(3000K, 92CRI) • Wall Washer LGC

(ILB10-030-WL)




| Center beam fc | Beam width ft | |
|----------------|---------------|-----------|
| 2ft | 127 | 1.9 1.8 |
| 4ft | 31.8 | 3.8 3.7 |
| 6ft | 14.1 | 5.7 5.5 |
| 8ft | 7.94 | 7.6 7.4 |
| 10ft | 5.08 | 9.4 9.2 |
| 12ft | 3.53 | 11.3 11.1 |

Power: 25.0W
Lumens: 634 lm
Efficacy: 25 lm/W
Max candela: 645 cd

| Photometric data multiplier | |
|-----------------------------|-------------|
| Color temperature | Lumens (lm) |
| 2700K | 0.91 |
| 3000K | 1.00 |
| 3500K | 1.04 |
| 4000K | 1.04 |

(3000K, 92CRI) • Wide Flood Oval Longitudinal°

(ILB10-030-LW)




| Center beam fc | Beam width ft | |
|----------------|---------------|-----------|
| 2ft | 115 | 1.9 1.8 |
| 4ft | 28.8 | 3.8 3.7 |
| 6ft | 12.8 | 5.7 5.5 |
| 8ft | 7.20 | 7.6 7.4 |
| 10ft | 4.61 | 9.4 9.2 |
| 12ft | 3.20 | 11.3 11.1 |

Power: 25.0W
Lumens: 1,814 lm
Efficacy: 72 lm/W
Max candela: 1,727 cd

| Photometric data multiplier | |
|-----------------------------|-------------|
| Color temperature | Lumens (lm) |
| 2700K | 0.93 |
| 3000K | 1.00 |
| 3500K | 1.03 |
| 4000K | 1.04 |

(3000K, 92CRI) • Wide Flood Oval Transversal°

(ILB10-030-TW)




| Center beam fc | Beam width ft | |
|----------------|---------------|-----------|
| 2ft | 127 | 1.8 2.3 |
| 4ft | 31.7 | 3.6 4.6 |
| 6ft | 14.1 | 5.4 6.8 |
| 8ft | 7.92 | 7.2 9.1 |
| 10ft | 5.07 | 9.0 11.4 |
| 12ft | 3.52 | 10.8 13.7 |

Power: 25.0W
Lumens: 1,814 lm
Efficacy: 72 lm/W
Max candela: 1,711 cd

| Photometric data multiplier | |
|-----------------------------|-------------|
| Color temperature | Lumens (lm) |
| 2700K | 0.93 |
| 3000K | 1.00 |
| 3500K | 1.03 |
| 4000K | 1.04 |


PHOTOMETRIC DATA

LB15

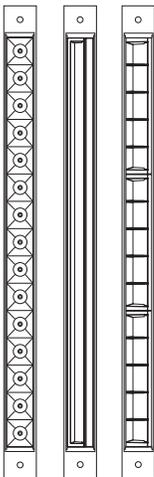

(3000K, 92CRI) • Spot 13°

(ILB15-030-SP)




| Center beam fc | Beam width ft |
|----------------|---------------|
| 2ft | 5 728 0.5 |
| 4ft | 1 432 0.9 |
| 6ft | 636 1.4 |
| 8ft | 358 1.9 |
| 10ft | 229 2.3 |
| 12ft | 159 2.8 |

Power: 36.5W
Lumens: 3,039 lm
Efficacy: 83 lm/W
Max candela: 25,662 cd

| Photometric data multiplier | |
|-----------------------------|-------------|
| Color temperature | Lumens (lm) |
| 2700K | 0.93 |
| 3000K | 1.00 |
| 3500K | 1.03 |
| 4000K | 1.04 |

(3000K, 92CRI) • Flood 32°

(ILB15-030-FL)




| Center beam fc | Beam width ft |
|----------------|---------------|
| 2ft | 2 312 1.2 |
| 4ft | 578 2.3 |
| 6ft | 257 3.5 |
| 8ft | 145 4.6 |
| 10ft | 92.5 5.8 |
| 12ft | 64.2 6.9 |

Power: 36.5W
Lumens: 3,039 lm
Efficacy: 83 lm/W
Max candela: 10,359 cd

| Photometric data multiplier | |
|-----------------------------|-------------|
| Color temperature | Lumens (lm) |
| 2700K | 0.93 |
| 3000K | 1.00 |
| 3500K | 1.03 |
| 4000K | 1.04 |

(3000K, 92CRI) • Wide Flood 47°

(ILB15-030-WF)




| Center beam fc | Beam width ft |
|----------------|----------------|
| 2ft | 1 124 1.7 1.8 |
| 4ft | 281 3.4 3.7 |
| 6ft | 125 5.2 5.5 |
| 8ft | 70.3 6.9 7.4 |
| 10ft | 45.0 8.6 9.2 |
| 12ft | 31.2 10.3 11.1 |

Power: 36.5W
Lumens: 3,076 lm
Efficacy: 84 lm/W
Max candela: 5,200 cd

| Photometric data multiplier | |
|-----------------------------|-------------|
| Color temperature | Lumens (lm) |
| 2700K | 0.93 |
| 3000K | 1.00 |
| 3500K | 1.03 |
| 4000K | 1.04 |

(3000K, 92CRI) • General Light Pro

(ILB15-030-GP)




| Center beam fc | Beam width ft |
|----------------|---------------|
| 2ft | 821 1.9 |
| 4ft | 205 3.8 |
| 6ft | 91.2 5.7 |
| 8ft | 51.3 7.5 |
| 10ft | 32.8 9.4 |
| 12ft | 22.8 11.3 |

Power: 36.5W
Lumens: 2 758 lm
Efficacy: 76 lm/W
Max candela: 3,678 cd

| Photometric data multiplier | |
|-----------------------------|-------------|
| Color temperature | Lumens (lm) |
| 2700K | 0.93 |
| 3000K | 1.00 |
| 3500K | 1.03 |
| 4000K | 1.04 |

(3000K, 92CRI) • Wall Washer

(ILB15-030-WW)




| Center beam fc | Beam width ft |
|----------------|----------------|
| 2ft | 196 1.8 2.3 |
| 4ft | 48.9 3.6 4.6 |
| 6ft | 21.7 5.4 6.8 |
| 8ft | 12.2 7.2 9.1 |
| 10ft | 7.83 9.0 11.4 |
| 12ft | 5.43 10.8 13.7 |

Power: 36.5W
Lumens: 1,277 lm
Efficacy: 33 lm/W
Max candela: 1,082 cd

| Photometric data multiplier | |
|-----------------------------|-------------|
| Color temperature | Lumens (lm) |
| 2700K | 0.92 |
| 3000K | 1.00 |
| 3500K | 1.03 |
| 4000K | 1.03 |

(3000K, 92CRI) • Wall Washer LGC

(ILB15-030-WL)



| Center beam fc | Beam width ft |
|----------------|----------------|
| 2ft | 173 1.9 1.8 |
| 4ft | 44.6 3.8 3.7 |
| 6ft | 19.8 5.7 5.5 |
| 8ft | 11.1 7.6 7.4 |
| 10ft | 7.14 9.4 9.2 |
| 12ft | 4.95 11.3 11.1 |

Power: 36.5W
Lumens: 958 lm
Efficacy: 25 lm/W
Max candela: 974 cd

| Photometric data multiplier | |
|-----------------------------|-------------|
| Color temperature | Lumens (lm) |
| 2700K | 0.93 |
| 3000K | 1.00 |
| 3500K | 1.04 |
| 4000K | 1.04 |