

Collection of architectural suspension for commercial applications. The white opal acrylic diffuser provides soft direct and indirect distribution. Ideal for offices, lobbies, or any other large commercial spaces where general lighting is desired.

Luminaire characteristics:

Power input: from 35W to 188W
Lumens: Up to 21 110 lm (for 3000K, 90CRI)
Luminaire efficacy: Up to 112 lm/W

Source: White LED (LM-90 tested)
3000K: 90CRI,
3500K: 90CRI,
4000K: 90CRI,

Lumen maintenance: 80% of initial lumens at 50 000 hours (L80).

Optics: Direct or direct & indirect emission configuration. General lighting or general light with glare control (UGR<19) available for downlight.

Material: Body: Extruded aluminum profile with steel support back. Diffuser: PMMA frosted or prismatic. Mounting: Stainless steel suspension cable, clear power cable and plastic canopy.

Mounting: Supplied with field adjustable cables either 6' or 13' feet.

Electrical: Integral high efficiency LED driver, rated at 50 000 hours, 120V/277V.

Dimming: Down to 0.1%, 0-10V or Dali

Finish: White (RAL9010) and black painted finish
*for black finish the upper part is always white

Weight: Small: 16.5lb (7.5kg);
Medium: 31.1lb (14.1kg);
Large: 52.2lb (23.7kg).


Warranty: 5 year limited warranty.

Ratings: IP20, IP43

Certification:  cULus listed for dry location



OVERVIEW

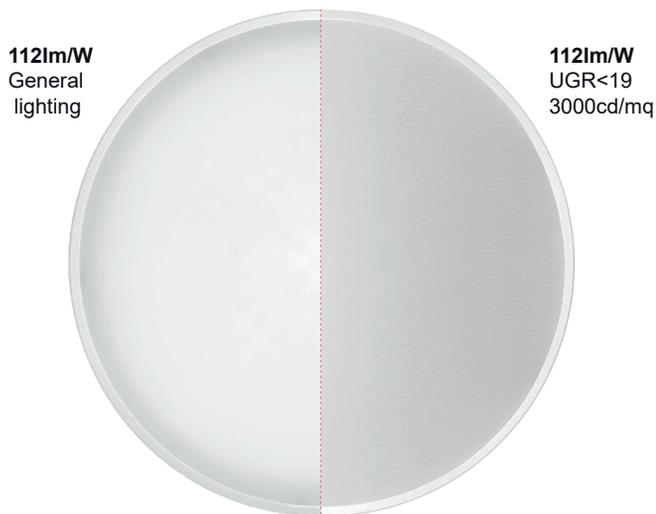


Two optics are available, general lighting with an opal methacrylate diffuser screen, and controlled luminance with a micro-prismatic diffuser screen that ensures high luminous efficiency and perfect luminance control at UGR<19, with single and dual emission.




OPTIC CONFIGURATION



DIRECT




DIRECT & INDIRECT




DIMENSIONS

SMALL Ø23½"

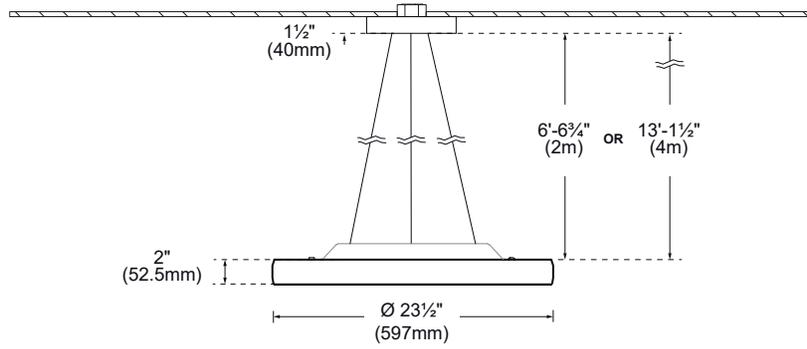


SIDE VIEW

MEDIUM Ø34⅞"

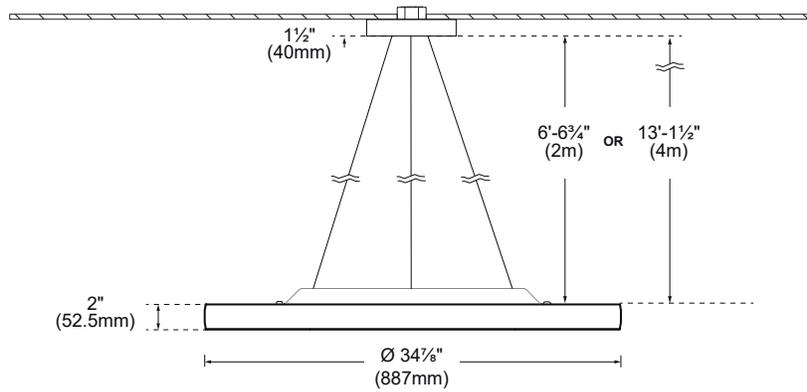

SIDE VIEW

LARGE Ø45½"

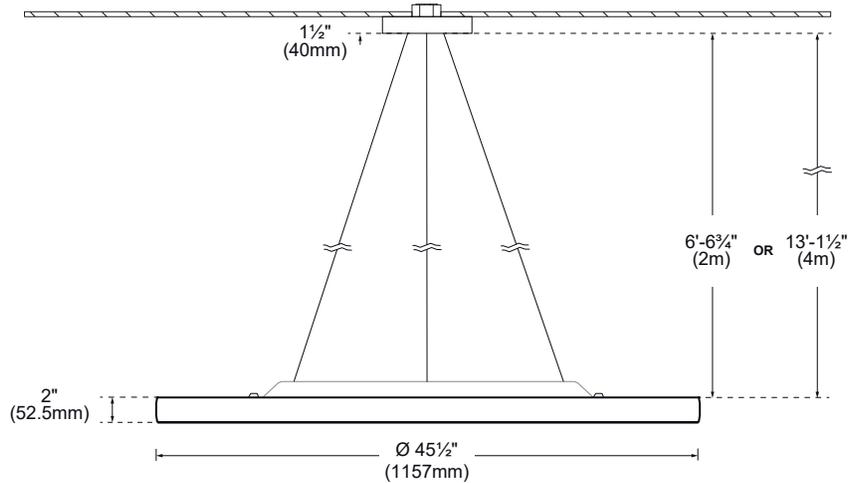

SIDE VIEW


LED COLOR FIDELITY DATA

| CCT | R1 | R2 | R3 | R4 | R5 | R6 | R7 | R8 | R9 | R10 | R11 | R12 | R13 | R14 | R15 | Rf | Rg | Melanopic ratio |
|-------|----|----|----|----|----|----|----|----|----|-----|-----|-----|-----|-----|-----|----|-----|-----------------|
| 3000K | 92 | 95 | 98 | 92 | 91 | 94 | 92 | 80 | 54 | 88 | 93 | 80 | 92 | 98 | 87 | 92 | 99 | 0.540 |
| 3500K | 91 | 93 | 94 | 92 | 90 | 91 | 94 | 84 | 59 | 84 | 92 | 77 | 91 | 96 | 88 | 91 | 100 | 0.610 |
| 4000K | 91 | 93 | 95 | 91 | 90 | 90 | 93 | 83 | 55 | 84 | 91 | 72 | 91 | 97 | 88 | 90 | 99 | 0.720 |

PHOTOMETRIC DATA

Visit www.iguzzini.com/us for complete photometric data.


S - SMALL



| CCT (K)* | CRI | LOAD (W) | EMISSION | OPTIC | LUMENS (lm) | EFFICACY (lm / w) | MAX CANDELA (cd) | MODELS |
|----------|-----|----------|-------------------|---------------|-------------|-------------------|------------------|----------------------|
| 3000K | 90 | 35W | Direct | Glare control | 2 965 | 84 | 1 270 | I.ISL-S-CP-DO-930-GC |
| | | 53W | | General light | 5 530 | 104 | 1 940 | I.ISL-S-CP-DO-930-GL |
| | | 37.5W | Direct & indirect | Glare control | 3 415 | 91 | 1 410 | I.ISL-S-CP-DI-930-GC |
| | | 53W | | General light | 5 675 | 107 | 1 930 | I.ISL-S-CP-DI-930-GL |


***USE MULTIPLIER TABLE FOR OTHER CCT AND CRI OUTPUT DATA**

General light (3000K, 90CRI)



| Center Beam fc | Beam Width ft |
|----------------|---------------|
| 2ft | 486 |
| 4ft | 121 |
| 6ft | 54.0 |
| 8ft | 30.4 |
| 10ft | 19.4 |
| 12ft | 13.5 |

Glare control (3000K,90CRI)




| Center Beam fc | Beam Width ft |
|----------------|---------------|
| 2ft | 318 |
| 4ft | 79.6 |
| 6ft | 35.4 |
| 8ft | 19.9 |
| 10ft | 12.7 |
| 12ft | 8.85 |

| | | | |
|-------------------|----------|-------------|-------------|
| CCT options | 3000K | 3500K | 4000K |
| CRI options | 90CRI | 90CRI | 90CRI |
| Multiplier | 1 | 1.02 | 1.04 |

PHOTOMETRIC DATA

Visit www.iguzzini.com/us for complete photometric data.


M - MEDIUM

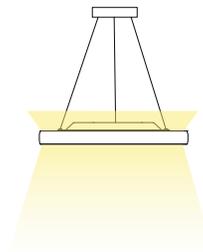

| CCT (K)* | CRI | LOAD (W) | EMISSION | OPTIC | LUMENS (lm) | EFFICACY (lm / w) | MAX CANDELA (cd) | MODELS |
|----------|-----|----------|-------------------|---------------|-------------|-------------------|------------------|----------------------|
| 3000K | 90 | 69W | Direct | Glare control | 7 185 | 104 | 3 055 | I.ISL-M-CP-DO-930-GC |
| | | 111W | | General light | 11 970 | 107 | 4 175 | I.ISL-M-CP-DO-930-GL |
| | | 73.5W | Direct & indirect | Glare control | 7 820 | 106 | 3 250 | I.ISL-M-CP-DI-930-GC |
| | | 111W | | General light | 12 125 | 109 | 4 155 | I.ISL-M-CP-DI-930-GL |


*USE MULTIPLIER TABLE FOR OTHER CCT AND CRI OUTPUT DATA

General light (3000K, 90CRI)




| Center Beam fc | Beam Width ft |
|----------------|---------------|
| 2ft | 1 045 6.0 |
| 4ft | 261 11.9 |
| 6ft | 116 17.9 |
| 8ft | 60.3 23.9 |
| 10ft | 41.8 29.8 |
| 12ft | 29.0 35.8 |

Glare control (3000K, 90CRI)



| Center Beam fc | Beam Width ft |
|----------------|---------------|
| 2ft | 763 4.5 |
| 4ft | 191 9.1 |
| 6ft | 84.8 13.6 |
| 8ft | 47.7 18.2 |
| 10ft | 30.5 22.7 |
| 12ft | 21.2 27.2 |


L - LARGE



| CCT (K)* | CRI | LOAD (W) | EMISSION | OPTIC | LUMENS (lm) | EFFICACY (lm / w) | MAX CANDELA (cd) | MODELS |
|----------|-----|----------|-------------------|---------------|-------------|-------------------|------------------|----------------------|
| 3000K | 90 | 117.5W | Direct | Glare control | 11 850 | 101 | 5 099 | I.ISL-L-CP-DO-930-GC |
| | | 188W | | General light | 20 840 | 110 | 7 240 | I.ISL-L-CP-DO-930-GL |
| | | 120.5W | Direct & indirect | Glare control | 12 510 | 104 | 5 280 | I.ISL-L-CP-DI-930-GC |
| | | 188W | | General light | 21 110 | 112 | 7 225 | I.ISL-L-CP-DI-930-GL |


*USE MULTIPLIER TABLE FOR OTHER CCT AND CRI OUTPUT DATA

General light (3000K, 90CRI)



| Center Beam fc | Beam Width ft |
|----------------|---------------|
| 2ft | 1 811 6.0 |
| 4ft | 453 12.0 |
| 6ft | 201 18.0 |
| 8ft | 113 24.0 |
| 10ft | 72.4 30.0 |
| 12ft | 50.3 35.9 |

Glare control (3000K, 90CRI)



| Center Beam fc | Beam Width ft |
|----------------|---------------|
| 2ft | 1 274 4.5 |
| 4ft | 319 9.0 |
| 6ft | 142 13.6 |
| 8ft | 79.6 18.1 |
| 10ft | 51.0 22.6 |
| 12ft | 35.4 27.1 |

| | | | |
|-------------------|----------|-------------|-------------|
| CCT options | 3000K | 3500K | 4000K |
| CRI options | 90CRI | 90CRI | 90CRI |
| Multiplier | 1 | 1.02 | 1.04 |

ORDERING INFO

I.ISL - - CP - - - - - UNV - -
FIXTURE

MODEL

- S** - Small **M** - Medium **L** - Large

MOUNTING

- CP** - Canopy Pendant

LENGTH

- 06'** - 6 Feet **13'** - 13 Feet

OPTIC CONFIGURATION

- DO** - Direct **DI** - Direct & indirect

LED

- 930** - 3000K, 90CRI **935** - 3500K, 90CRI **940** - 4000K, 90CRI

OPTIC

- GC** - Glare control **GL** - General light

VOLTAGE

- UNV** - 120V-277V

FINISH

- 01** - White **02** - Black

DIMMING⁽¹⁾

- D10** - 0-10V **DA** - DALI

⁽¹⁾0.1% dimming options: Dali and 0-10V (D10), the dimming levels will vary depending on the dimmer used and the number of luminaires on the line.