


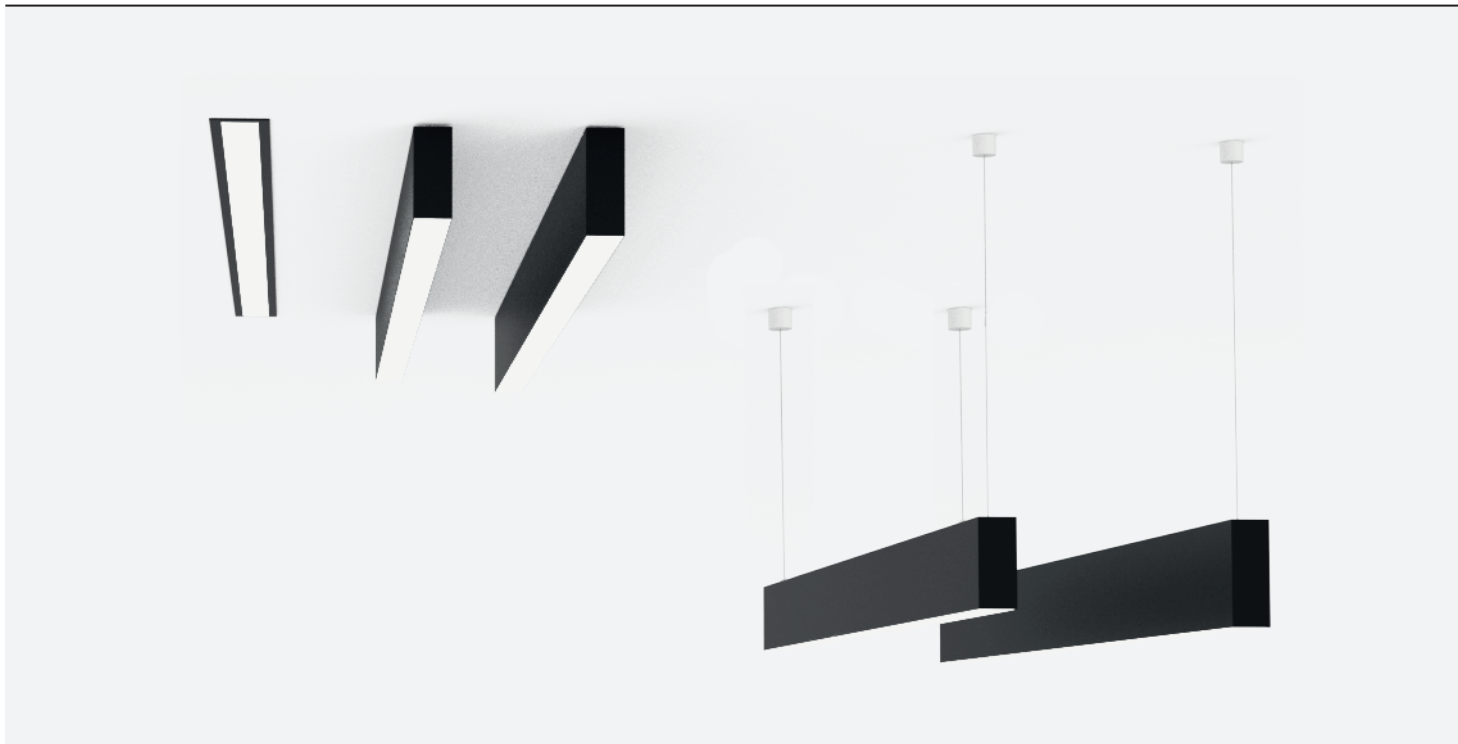
Slim recessed trim luminaire with iGuzzini 48V low voltage track.
Compatible with iGuzzini 48V low voltage products.

Material:	Body: Extruded aluminum profile with die-cast end caps. Mounting: Steel brackets
Mounting:	Recessed installation using brackets. Suitable for insulated ceilings. Maximum ceiling thickness of 1"(25mm).
Electrical:	Integral high efficiency electronic LED driver, rated 50 000 hours, 120-277V. Low voltage track option to be used only with iGuzzini 48V low voltage modules.
Dimming:	0-10V (120-277V) or DALI (120-277V) down to 5%.
Finish:	Available in white RAL9010 or black RAL9004.
Weight:	1.61 lbs/ft (0.73kg/ft)
Warranty:	5 year limited warranty.
Ratings:	IP20, IP00 (track)
Certification:	 cULus listed for dry location.

MADE IN CANADA.

FAMILY OVERVIEW

Linear small family offers a wide range of mounting and optic options for multiple applications




GENERAL LIGHT
MICROPRISMATIC

GENERAL LIGHT
FROSTED

LOW VOLTAGE
48V TRACK


LASER BLADE XS
coming soon

Powered by **iGuzzini**

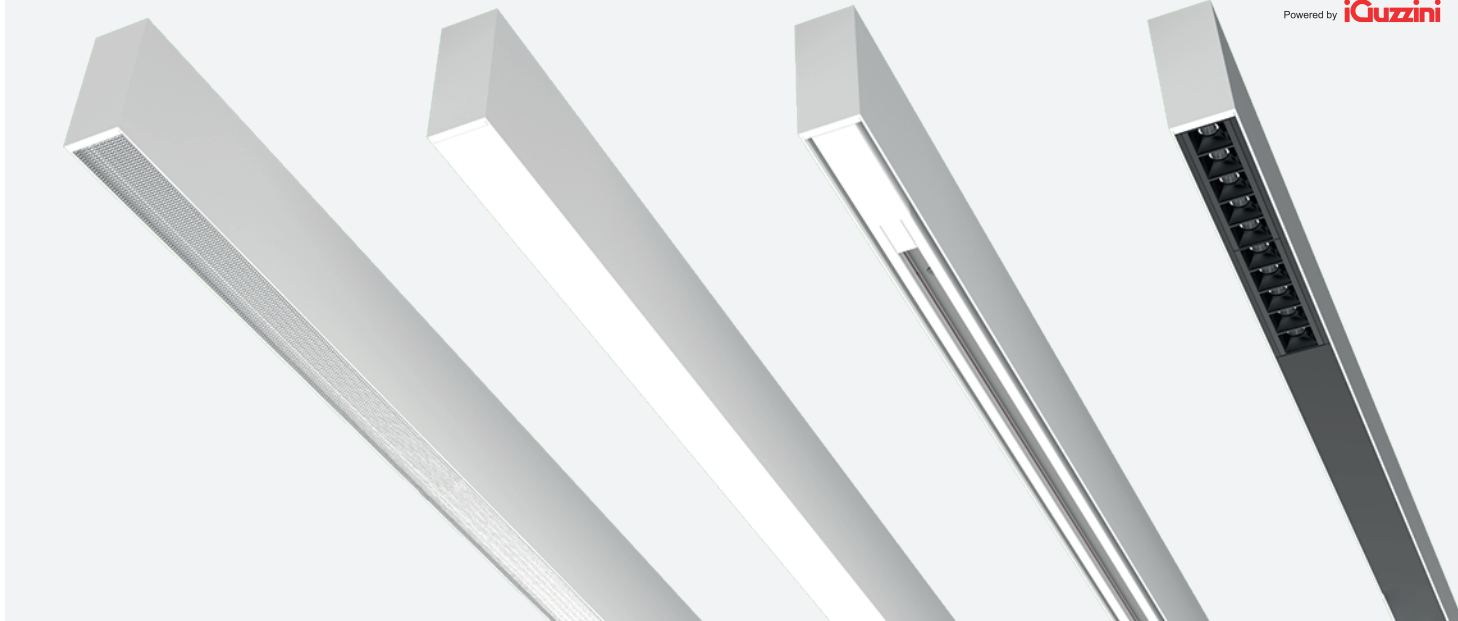


PRODUCT COMPATIBILITY

iGUZZINI PALCO LOW VOLTAGE SPOTLIGHT*

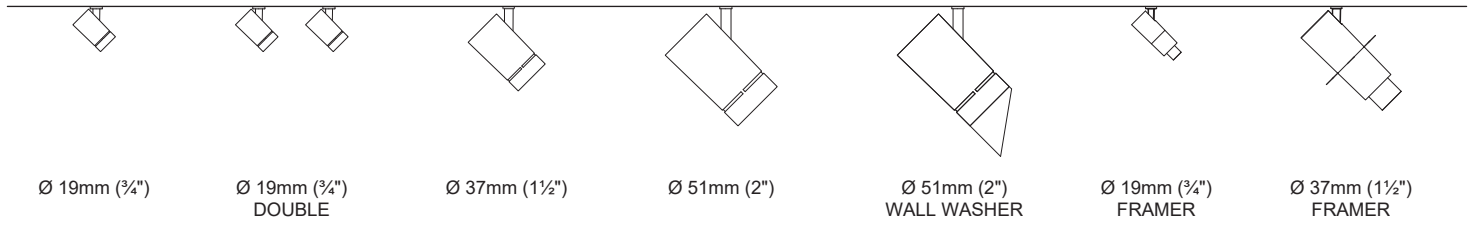


iGUZZINI LASER BLADE XS LOW VOLTAGE TRACK MODULES*

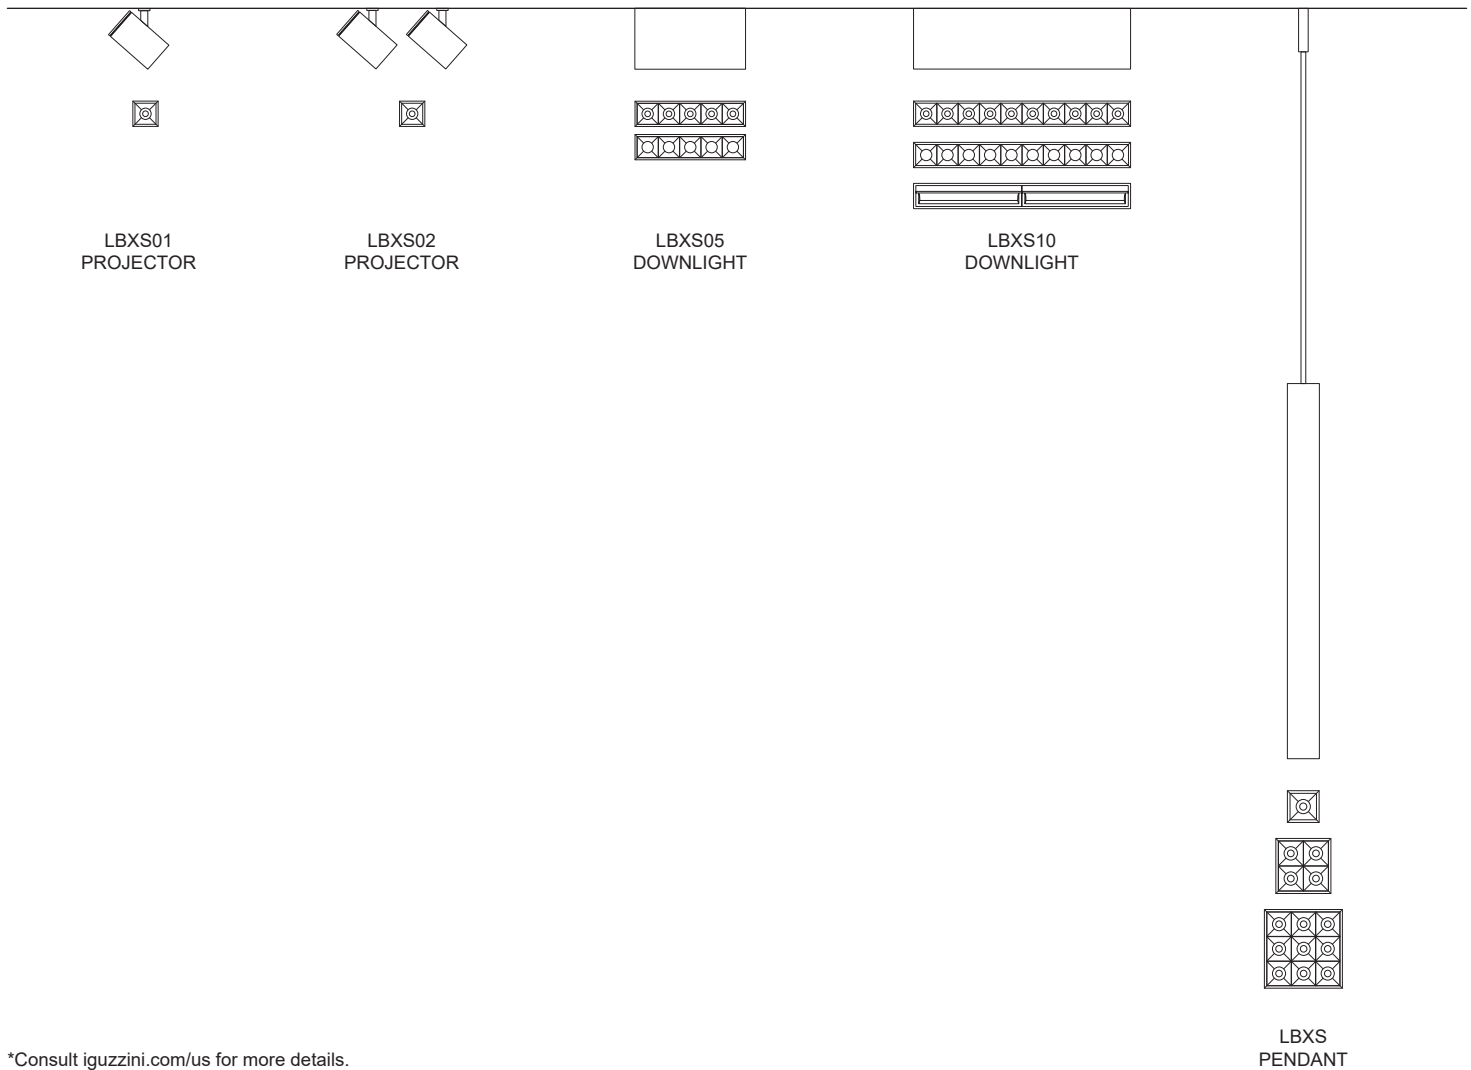


*Consult iguzzini.com/us for more details.

DIMENSIONS

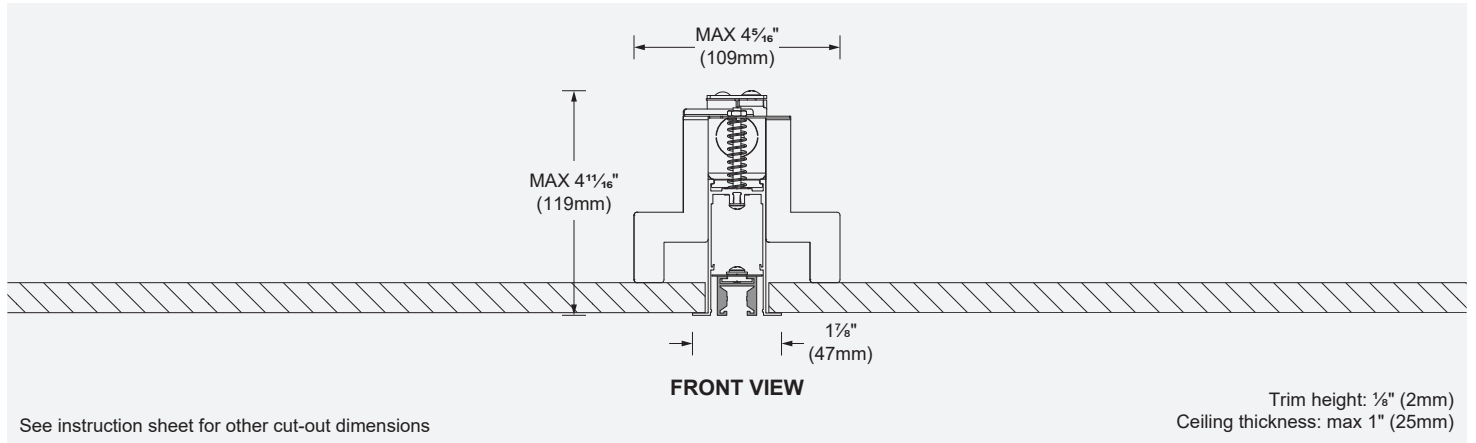

LENGTHS

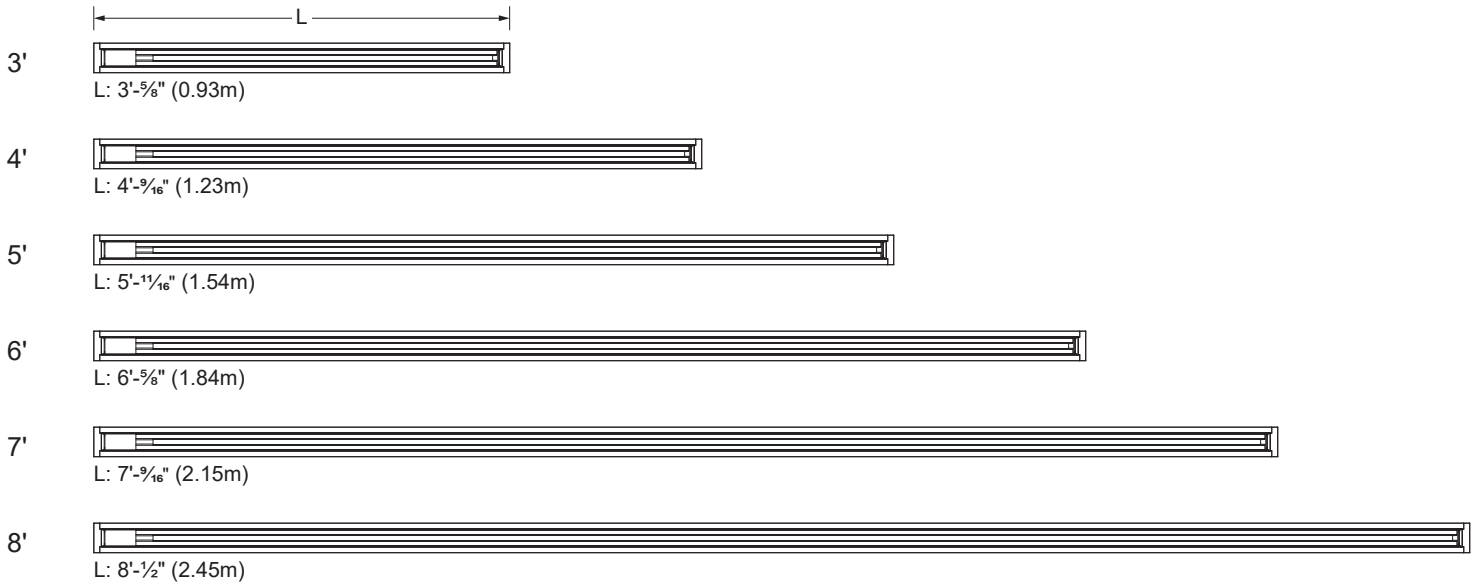

Longer lengths available. See ordering info p.3.

ORDERING INFO

3402 - - LZ T UNV
FIXTURE

MODEL

3402 - Trim

LENGTH

_____ 3' to 100'

TRACK

LZ - Low voltage 48V

T - Track

VOLTAGE

UNV - 120-277V

FINISH

01 - White

02 - Black

DIMMING

D10 - 0-10V (down to 5%)

DA - Dali (down to 5%)