


LIGHTING TOOLS TO BE ORDERED SEPERATELY

Superrail is a structure allowing an infinite number of lighting solutions. This miniature 48V low voltage track is only 25mm wide and can be configure in infinite lengths in a continuous and seamless manner. Superrail pendant up/down system allows both direct and indirect lighting. The Robin spotlight can be integrated on top at the same time as inserting various professional lighting tools underneath such as general lighting modules for continuous linear effect or low voltage spotlights thereby offering an infinity of combinations. Ideal for exhibition spaces, retail, hospitality and residences.

Material:	Extruded aluminum / insulated copper conductor.
Mounting:	Suspended mounting. If required, can be cut on site.
Electrical:	48V remote LED driver . Upper and lower parts of the track can be used on a single or double feeder for 2 circuit applications. Maximum 100w per feed on each circuit. See remote LED driver options on page 8.
Dimming:	0-10V Single channel for complete track control. DALI individual luminaire control. See remote LED driver details on page 8.
Finish:	Track: White or black painted finish. Accessories: White or black color.
Weight:	L500: 1.52lb (0.69kg) L1000: 3.02lb (1.37kg) L2000: 6.04lb (2.74kg) L3000: 9.06lb (4.11kg)
Warranty:	5 year limited warranty.
Certification:	cULus listed for dry location




SYSTEM OVERVIEW

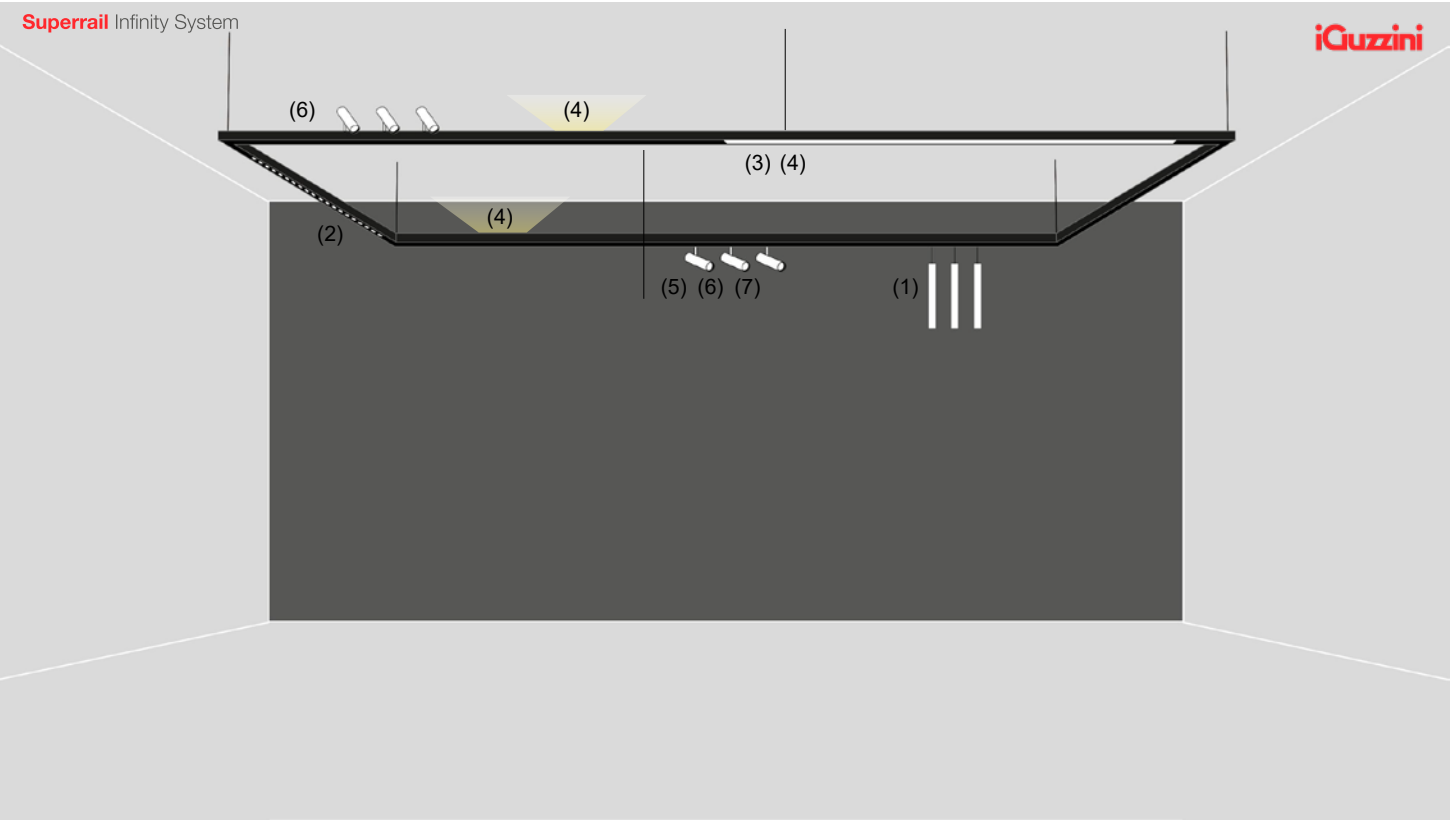

LIGHTING TOOLS AVAILABLE FOR SUPERRAIL


PENDANT

LASER BLADE XS (1)

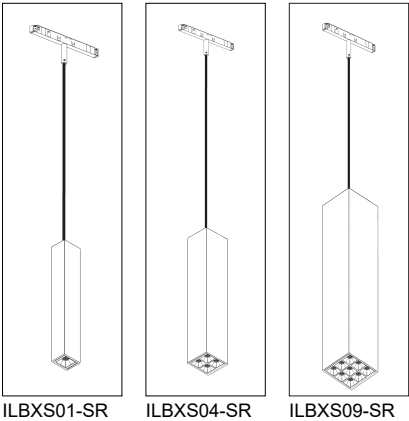

MODULE

LASER BLADE XS (2)



LED STICK (3)




LED STRIP FOR UPLIGHT (4)




TRACK HEAD


LASER BLADE XS (5)



ROBIN (6)




PALCO LV (7)

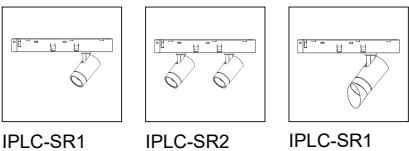

MODEL AND MOUNTING

MOUNTING

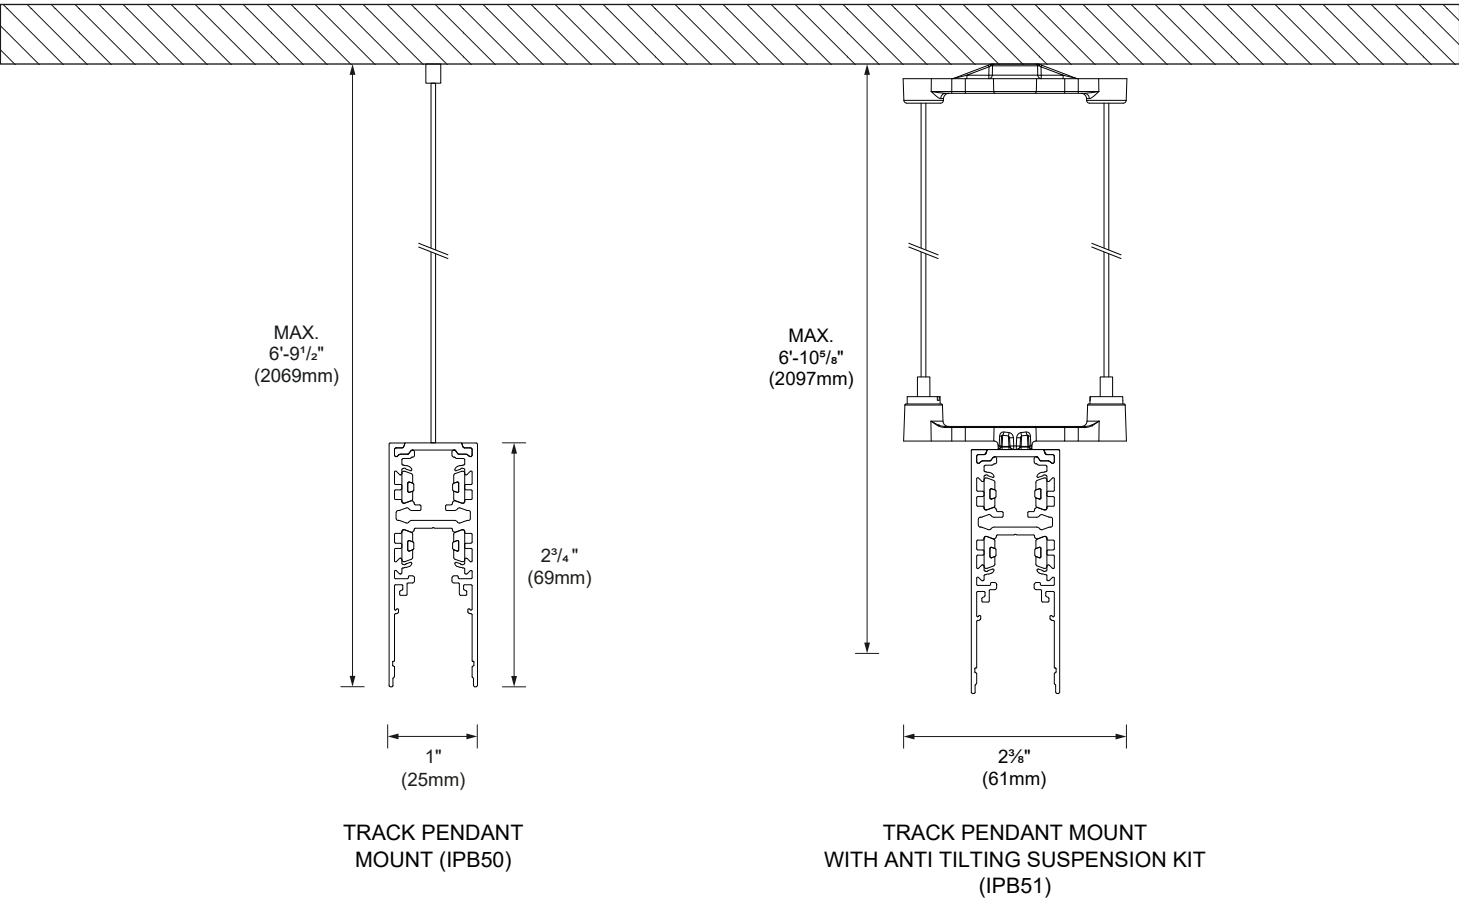


MODEL LENGTH

NOMINAL
LENGTH

1.6'	L : 1'-7 5/8" (500mm)
3.3'	L : 3'-3 3/8" (1000mm)
6.5'	L : 6'-6 3/4" (2000mm)
9.8'	L : 9'-10 1/8" (3000mm)

PENDANT MOUNTING ACCESSORIES

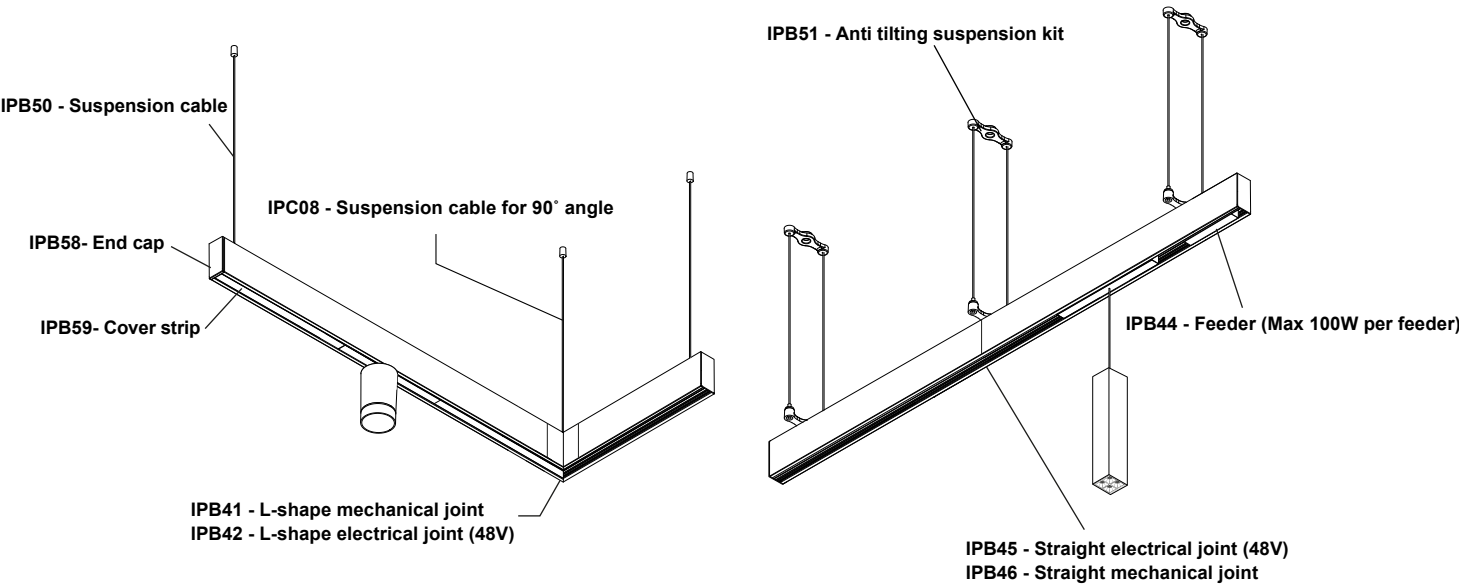

PENDANT MOUNTING ACCESSORIES

IPB64


Square canopy with 4 conductors clear electrical cable

3" x 3" x 1 3/8" (76 x 76 x 35mm)

Cable length: 6'-6 3/4" (2m)

*Connections inside canopy.

4" junction box not required.

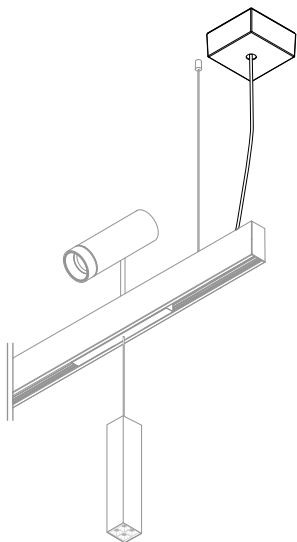

IPB65


Square canopy with 4 conductors clear electrical cable and suspension cable

3" x 3" x 1 3/8" (76 x 76 x 35mm)

Cable length: 6'-6 3/4" (2m)

*Connections inside canopy.

4" junction box not required.

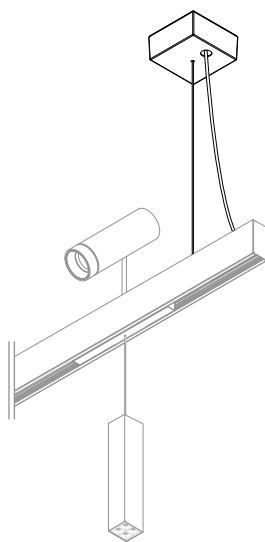

IPC10


Square canopy for 90° angle with 4 conductors clear electrical cable and suspension cable

3" x 3" x 1 3/8" (76 x 76 x 35mm)

Cable length: 6'-6 3/4" (2m)

*Connections inside canopy.

4" junction box not required.

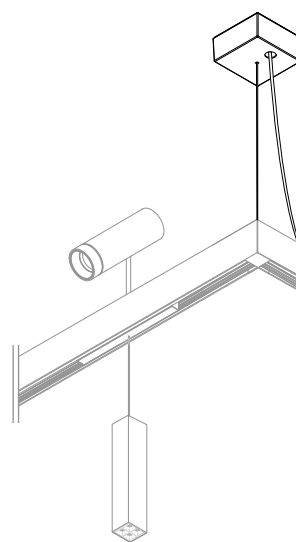


IPD45

Round canopy with 4 conductors clear electrical cable

Ø4 1/2" (114mm)

Cable length: 6'-6 3/4" (2m)

To be installed on a 4" junction box..

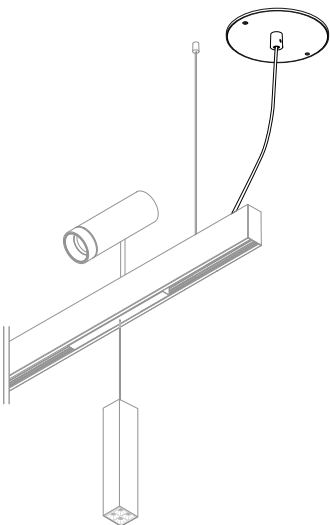


IPD46

Round canopy with 4 conductors clear electrical cable and suspension cable

Ø4 1/2" (114mm)

Cable length: 6'-6 3/4" (2m)

To be installed on a 4" junction box.

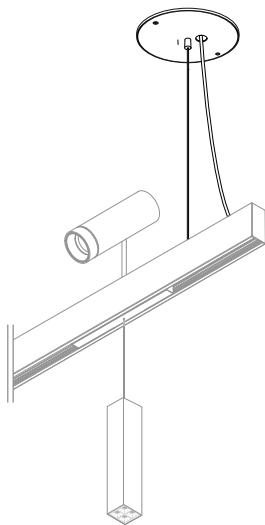


IPD48

Round canopy for 90° angle with 4 conductors clear electrical cable and suspension cable

Ø4 1/2" (114mm)

Cable length: 6'-6 3/4" (2m)

To be installed on a 4" junction box.

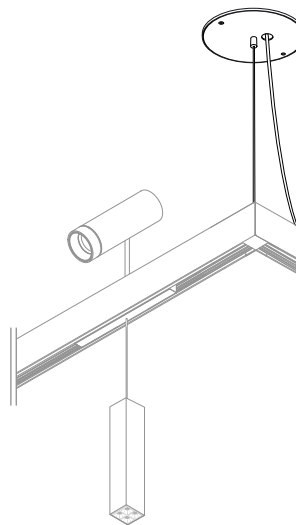

ELECTRICAL TRACK ACCESSORIES
(TO BE ORDERED SEPARATELY)


L-SHAPE ELECTRICAL JOINT

- ☐ **IPB42-01** - White finish
☐ **IPB42-02** - Black finish




FEEDER
Max 100W per feeder

- ☐ **IPB44-01** - White finish
☐ **IPB44-02** - Black finish



STRAIGHT ELECTRICAL JOINT


- ☐ **IPB45-01** - White finish
☐ **IPB45-02** - Black finish



PENDANT AND SURFACE MOUNTING ACCESSORIES
(TO BE ORDERED SEPARATELY)


L-SHAPE MECHANICAL JOINT
Insulation tape included

- ☐ **IPB41-01** - White finish
☐ **IPB41-02** - Black finish



STRAIGHT MECHANICAL JOINT
INSULATION TAPE INCLUDED

- ☐ **IPB46**



SUSPENSION CABLE

L 6'-6¾" (2m)
Refer to installation sheet for number of cable to be used

- ☐ **IPB50-01** - White finish
☐ **IPB50-02** - Black finish



ANTI TILTING SUSPENSION KIT

- ☐ **IPB51-01** - White finish
☐ **IPB51-02** - Black finish



SUSPENSION CABLE FOR 90° ANGLE

L 6'-6¾" (2m)
Refer to installation sheet for number of cable to be used

- ☐ **IPC08-01** - White finish
☐ **IPC08-02** - Black finish




ELECTRICAL PENDANT ACCESSORIES
(TO BE ORDERED SEPARATELY)

ROUND CANOPY WITH CLEAR POWER CABLE

Ø 4½" (114mm) Cable length: 6'-6¾" (2m), 4 cond
To be installed on 4" octagonal junction box


- ☐ **IPD45-01** - White finish
☐ **IPD45-02** - Black finish



ROUND CANOPY WITH CLEAR POWER CABLE AND SUSPENSION CABLE

Ø 4½" (114mm) Cable length: 6'-6¾" (2m), 4 cond
To be installed on 4" octagonal junction box


- ☐ **IPD46-01** - White finish
☐ **IPD46-02** - Black finish



ROUND CANOPY WITH CLEAR POWER CABLE AND SUSPENSION CABLE FOR 90° ANGLE

Ø 4½" (114mm) Cable length: 6'-6¾" (2m), 4 cond
To be installed on 4" octagonal junction box


- ☐ **IPD48-01** - White finish
☐ **IPD48-02** - Black finish



SQUARE CANOPY WITH CLEAR POWER CABLE

3" x 3" x 1½" (76 x 76 x 35mm) Cable length: 6'-6¾" (2m), 4 cond
Connections inside canopy. Junction box not required.

- ☐ **IPB64-01** - White finish
☐ **IPB64-02** - Black finish



SQUARE CANOPY WITH CLEAR POWER CABLE AND SUSPENSION CABLE

3" x 3" x 1½" (76 x 76 x 35mm) Cable length: 6'-6¾" (2m), 4 cond
Connections inside canopy. Junction box not required.


- ☐ **IPB65-01** - White finish
☐ **IPB65-02** - Black finish



SQUARE CANOPY WITH CLEAR POWER CABLE AND SUSPENSION CABLE FOR 90° ANGLE

3" x 3" x 1½" (76 x 76 x 35mm) Cable length: 6'-6¾" (2m), 4 cond
Connections inside canopy. Junction box not required.


- ☐ **IPC10-01** - White finish
☐ **IPC10-02** - Black finish



TRACK ACCESSORIES
(TO BE ORDERED SEPARATELY)


END CAP KIT FOR SUPERRAIL
2 pcs included

- ☐ **IPB58-01** - White finish
☐ **IPB58-02** - Black finish



COVER STRIP KIT
2 pcs of 39" (1m)

- ☐ **IPB59-01** - White finish
☐ **IPB59-02** - Black finish



ORDERING INFO

ITRUD - SR - - 48 -
FIXTURE

MODEL

☒ ITRUD-SR

LENGTH

☐ 1.6 - (500mm) ☐ 3.3 - (1000mm) ☐ 6.5 - (2000mm) ☐ 9.8 - (3000mm)


VOLTAGE

☒ 48 - 48V

FINISH

☐ 01 - White ☐ 02 - Black

PENDANT INSTALLATION EXAMPLE (100W MAXIMUM PER FEED)

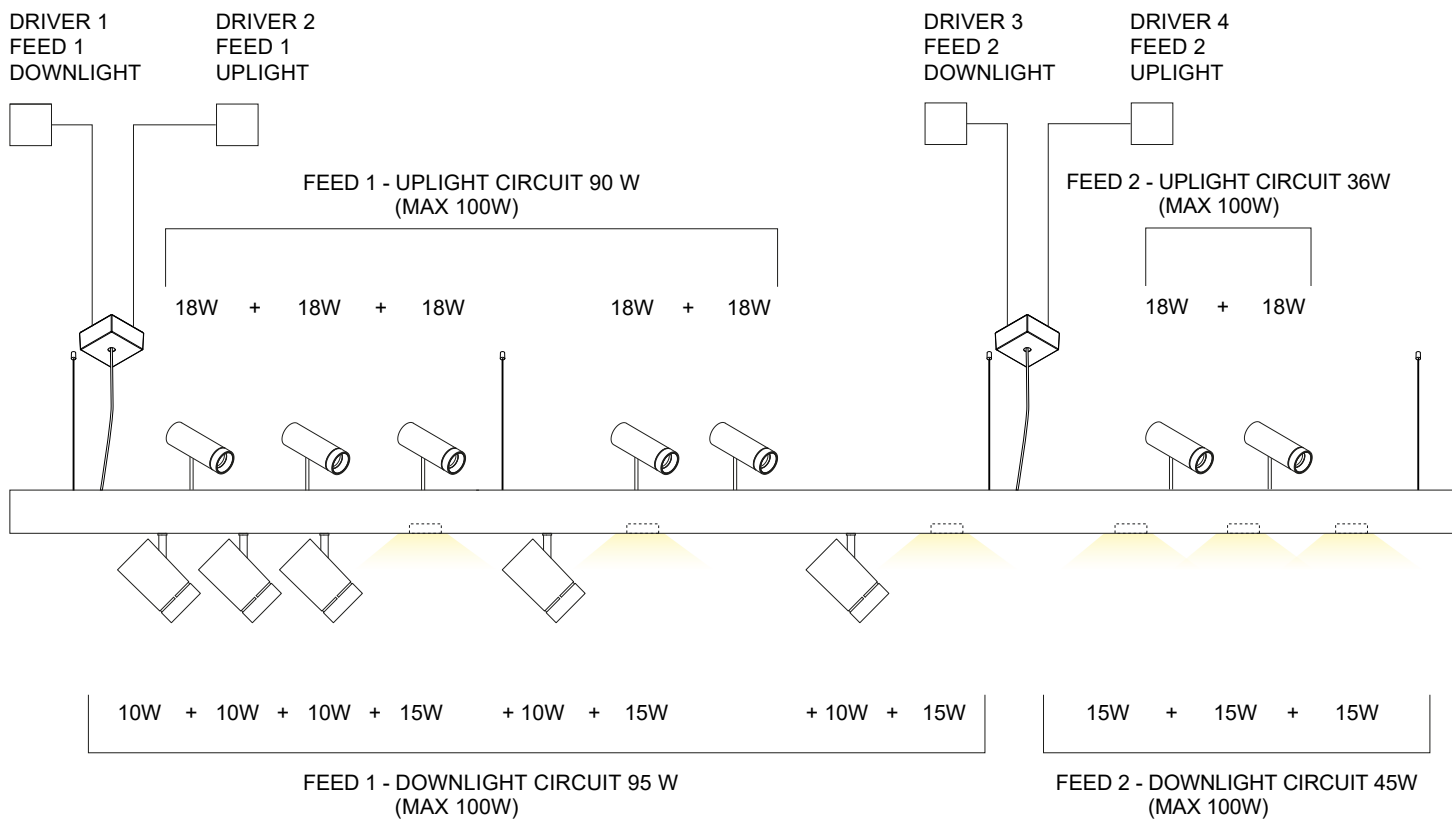

REMOTE LED DRIVER OPTIONS

(TO BE ORDERED SEPARATELY)

Requirement: Max 100W per circuit.

Watts	Min Watts	Voltage	Rated	Dimming protocol	Dimming range	Dimension	Max distance*
<input type="checkbox"/>	4444-0048-035-UNV-ND						
35	—	120-277V	Indoor	None	—	6" x 4" x 3" (152 X 102 X 76mm)	98ft (30m)
<input type="checkbox"/>	4444-0048-072-UNV-ND						
72	—	120-277V	Indoor	None	—	6" x 4" x 3" (152 X 102 X 76mm)	98ft (30m)
<input type="checkbox"/>	4450-0048-096-UNV-ND						
96	4.8W	120-277V	Indoor	None	—	8" x 8" x 4" (203 X 203 X 102mm)	98ft (30m)
<input type="checkbox"/>	4451-0048-100-UNV-TD10						
100	—	120-277V	Indoor	0-10V	Down to ±6%	18" x 4" x 4" (457 x 102 x 102mm)	98ft (30m)
<input type="checkbox"/>	4451-0048-100-UNV-TDA**						
100	—	120-277V	Indoor	Dali	Down to ±6%	18" x 4" x 4" (457 x 102 x 102mm)	98ft (30m)
<input type="checkbox"/>	4546-0048-200-2C-UNV-ND						
200	—	120-277V	Indoor / outdoor	None	—	13" x 5" x 3" (330 X 127 X 76mm)	2 x 98ft (30m)

*Calculated for 16 or 18 awg cable. Refer to instruction sheet INS-489. Total length is for cable + track.

**DALI Up to 20 individual fixture addressing and control.